



ETA-Danmark A/S
Göteborg Plads 1
DK-2150 Nordhavn
Tel. +45 72 24 59 00
Fax +45 72 24 59 04
Internet www.etadanmark.dk

Authorised and notified according
to Article 29 of the Regulation (EU)
No 305/2011 of the European
Parliament and of the Council of 9
March 2011

MEMBER OF EOTA



European Technical Assessment ETA-12/0114 of 2024/10/15

I General Part

Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: ETA-Danmark A/S

Trade name of the construction product:

SPAX self-tapping screws

Product family to which the above construction product belongs:

Screws for use in timber constructions

Manufacturer:

SPAX International GmbH & Co. KG
Kölner Strasse 71-77
DE-58256 Ennepetal
Tel. +49 23 33 799-0
Fax + 49 23 33 799-199
Internet www.spax.com

Manufacturing plant:

SPAX manufacturing facilities. Held on file by ETA-Danmark A/S

This European Technical Assessment contains:

104 pages including 5 annexes which form an integral part of the document

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:

European Assessment document (EAD) no. EAD 130118-01-0603 "Screws and threaded rods for use in timber constructions"

This version replaces:

The previous ETA with the same number issued on 2020-01-07

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

SPAX screws are self-tapping screws to be used in timber structures. They shall be threaded over a part or over the full length. SPAX threaded rods shall be threaded over the full length. The screws shall be produced from carbon steel wire for nominal diameters of 2,5 mm to 12,0 mm and from stainless steel wire for nominal diameters of 3,0 mm to 12,0 mm. SPAX threaded rods shall be produced from carbon steel wire or from stainless steel wire for a nominal diameter of 16,0 mm. Where corrosion protection is required, the material or coating shall be declared in accordance with the relevant specification given in Annex A of EN 14592.

Geometry and Material

The nominal diameter (outer thread diameter), d , of SPAX screws shall not be less than 2,5 mm and shall not be greater than 12,0 mm. The nominal diameter of SPAX threaded rods is 16 mm. The overall length of the screws, ℓ , shall not be less than 20 mm and shall not be greater than 1000 mm. The overall length of the threaded rods, ℓ , shall not be greater than 3000 mm. Other dimensions are given in Annex A.

The ratio of inner thread diameter to outer thread diameter d_i/d ranges from 0,58 to 0,68.

The screws are threaded over a minimum length ℓ_g of $4 \cdot d$ (i.e. $\ell_g \geq 4 \cdot d$).

The lead p (distance between two adjacent thread flanks) ranges from $0,49 \cdot d$ to $0,61 \cdot d$.

No breaking shall be observed at a bend angle, α , of less than $(45/d^{0,7} + 20)$ degrees.

2 Specification of the intended use in accordance with the applicable EAD

The screws and threaded rods are used for connections in load bearing timber structures between members of solid timber (softwood), glued laminated timber (softwood), cross-laminated timber, and laminated veneer lumber (softwood), similar glued members, wood-based panels or steel. The screws are also used for connections in load bearing members of solid timber (hardwood), glued laminated timber (hardwood) or laminated veneer lumber (hardwood). SPAX screws with a thread over the full

length and SPAX threaded rods are also used as tensile or compressive reinforcement perpendicular to the grain or as shear reinforcement in softwood members.

Furthermore, SPAX screws with diameters between 6 mm and 12 mm may also be used for the fixing of thermal insulation material on rafters.

Steel plates and wood-based panels except solid wood panels, laminated veneer lumber and cross laminated timber shall only be located on the side of the screw head. The following wood-based panels may be used:

- Plywood according to EN 636 or European Technical Assessment or national provisions that apply at the installation site
- Particleboard according to EN 312 or European Technical Assessment or national provisions that apply at the installation site
- Oriented Strand Board according to EN 300 or European Technical Assessment or national provisions that apply at the installation site
- Fibreboard according to EN 622-2 and 622-3 or European Technical Assessment (minimum density 650 kg/m³) or national provisions that apply at the installation site
- Cement bonded particleboard according to EN 634 or European Technical Assessment or national provisions that apply at the installation site
- Solid wood panels according to EN 13353 or European Technical Assessment or national provisions that apply at the installation site
- Cross laminated timber according to European Technical Assessment
- Laminated Veneer Lumber according to EN 14374 or European Technical Assessment
- Engineered wood products according to European Technical Assessment

The screws or threaded rods are intended to be used in timber connections for which requirements for mechanical resistance and stability and safety in use in the the sense of the Basic Works Requirements 1 and 4 of Regulation 305/2011 (EU) shall be fulfilled.

The design of the connections shall be based on the characteristic load-carrying capacities of the screws. The design capacities shall be derived from the characteristic capacities in accordance with Eurocode 5 or an appropriate national code.

The screws are intended for use for connections subject to static or quasi static loading.

The zinc-coated screws and threaded rods are for use in timber structures subject to the dry, internal conditions defined by the service classes 1 and 2 of EN 1995-1-1:2008 (Eurocode 5). The screws and threaded rods

made of stainless steel meet the requirements of Eurocode 5 (EN 1995-1-1:2008) for use in structures subject to the wet conditions defined as service class 3.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the screws of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

Characteristic	Assessment of characteristic																								
3.1 Mechanical resistance and stability*) (BWR1)																									
Dimensions	See annex A																								
Characteristic yield moment	See section 3.4																								
Bending angle	No performance assessed																								
Characteristic withdrawal parameter	See section 3.4																								
Characteristic head pull-trough parameter of screws	See section 3.4																								
Tensile strength	Characteristic value $f_{tens,k}$:																								
Screws made of carbon steel	<table> <tr><td>d = 2,5 mm:</td><td>1,8 kN</td></tr> <tr><td>d = 3,0 mm:</td><td>2,6 kN</td></tr> <tr><td>d = 3,5 mm:</td><td>3,8 kN</td></tr> <tr><td>d = 4,0 mm:</td><td>5,0 kN</td></tr> <tr><td>d = 4,5 mm or 4,6 mm:</td><td>6,4 kN</td></tr> <tr><td>d = 5,0 mm:</td><td>7,9 kN</td></tr> <tr><td>d = 5,6 mm:</td><td>9,9 kN</td></tr> <tr><td>d = 6,0 mm:</td><td>11 kN</td></tr> <tr><td>d = 7,0 mm:</td><td>13 kN</td></tr> <tr><td>d = 8,0 mm:</td><td>17 kN</td></tr> <tr><td>d = 10,0 mm:</td><td>28 kN</td></tr> <tr><td>d = 12,0 mm:</td><td>38 kN</td></tr> </table>	d = 2,5 mm:	1,8 kN	d = 3,0 mm:	2,6 kN	d = 3,5 mm:	3,8 kN	d = 4,0 mm:	5,0 kN	d = 4,5 mm or 4,6 mm:	6,4 kN	d = 5,0 mm:	7,9 kN	d = 5,6 mm:	9,9 kN	d = 6,0 mm:	11 kN	d = 7,0 mm:	13 kN	d = 8,0 mm:	17 kN	d = 10,0 mm:	28 kN	d = 12,0 mm:	38 kN
d = 2,5 mm:	1,8 kN																								
d = 3,0 mm:	2,6 kN																								
d = 3,5 mm:	3,8 kN																								
d = 4,0 mm:	5,0 kN																								
d = 4,5 mm or 4,6 mm:	6,4 kN																								
d = 5,0 mm:	7,9 kN																								
d = 5,6 mm:	9,9 kN																								
d = 6,0 mm:	11 kN																								
d = 7,0 mm:	13 kN																								
d = 8,0 mm:	17 kN																								
d = 10,0 mm:	28 kN																								
d = 12,0 mm:	38 kN																								
Threaded rods made of carbon steel or stainless steel	<table> <tr><td>d = 16,0 mm:</td><td>63 kN</td></tr> </table>	d = 16,0 mm:	63 kN																						
d = 16,0 mm:	63 kN																								
Screws made of stainless steel	<table> <tr><td>d = 3,0 mm:</td><td>2,1 kN</td></tr> <tr><td>d = 3,5 mm:</td><td>2,9 kN</td></tr> <tr><td>d = 4,0 mm:</td><td>3,8 kN</td></tr> <tr><td>d = 4,5 mm or 4,6 mm:</td><td>4,2 kN</td></tr> <tr><td>d = 5,0 mm or 5,2 mm:</td><td>4,9 kN</td></tr> <tr><td>d = 5,6 mm:</td><td>6,2 kN</td></tr> <tr><td>d = 6,0 mm:</td><td>7,1 kN</td></tr> <tr><td>d = 7,0 mm:</td><td>10 kN</td></tr> <tr><td>d = 8,0 mm:</td><td>13 kN</td></tr> <tr><td>d = 10,0 mm:</td><td>20 kN</td></tr> <tr><td>d = 12,0 mm:</td><td>28 kN</td></tr> </table>	d = 3,0 mm:	2,1 kN	d = 3,5 mm:	2,9 kN	d = 4,0 mm:	3,8 kN	d = 4,5 mm or 4,6 mm:	4,2 kN	d = 5,0 mm or 5,2 mm:	4,9 kN	d = 5,6 mm:	6,2 kN	d = 6,0 mm:	7,1 kN	d = 7,0 mm:	10 kN	d = 8,0 mm:	13 kN	d = 10,0 mm:	20 kN	d = 12,0 mm:	28 kN		
d = 3,0 mm:	2,1 kN																								
d = 3,5 mm:	2,9 kN																								
d = 4,0 mm:	3,8 kN																								
d = 4,5 mm or 4,6 mm:	4,2 kN																								
d = 5,0 mm or 5,2 mm:	4,9 kN																								
d = 5,6 mm:	6,2 kN																								
d = 6,0 mm:	7,1 kN																								
d = 7,0 mm:	10 kN																								
d = 8,0 mm:	13 kN																								
d = 10,0 mm:	20 kN																								
d = 12,0 mm:	28 kN																								
Characteristic yield strength	See section 3.4																								
Insertion moment	Ratio of the characteristic torsional strength to the mean insertion moment: $f_{tor,k} / R_{tor,mean} \geq 1,5$																								

Characteristic	Assessment of characteristic
Torsional strength	Characteristic value $f_{tor,k}$:
Screws made of carbon steel	d = 2,5 mm: 0,65 Nm
	d = 3,0 mm: 1,3 Nm
	d = 3,5 mm: 2,0 Nm
	d = 4,0 mm: 3,0 Nm
	d = 4,5 mm or 4,6 mm: 4,0 Nm
	d = 5,0 mm: 6,0 Nm
	d = 5,6 mm: 8,0 Nm
	d = 6,0 mm: 10,5 Nm
	d = 7,0 mm: 14,2 Nm
	d = 8,0 mm: 21 Nm
	d = 10,0 mm: 40 Nm
	d = 12,0 mm: 70 Nm
Screws made of stainless steel	d = 3,0 mm: 1,0 Nm
	d = 3,5 mm: 1,7 Nm
	d = 4,0 mm: 2,4 Nm
	d = 4,5 mm or 4,6 mm: 3,2 Nm
	d = 5,0 mm or 5,2 mm: 4,6 Nm
	d = 5,6 mm: 5,6 Nm
	d = 6,0 mm: 7,0 Nm
	d = 7,0 mm: 8,7 Nm
	d = 8,0 mm: 17 Nm
	d = 10 mm: 28 Nm
	d = 12 mm: 54 Nm
Screws made of stainless steel	d = 4,0 mm: 3,3 Nm
	d = 4,5 mm: 4,5 Nm
	d = 5,0 mm: 6,1 Nm
Insertion moment	Ratio of the characteristic torsional strength to the mean insertion moment:
	$f_{tor,k} / R_{tor,mean} \geq 1,5$
Spacing, end and edge distances of the screws or threaded rods and minimum thickness of the timber material	See annex B
Slip modulus for mainly axially loaded screws and threaded rods	See section 3.4
Durability against corrosion	See section 3.5
3.2 Safety in case of fire (BWR2)	
Reaction to fire	The screws are made from steel classified as Euroclass A1 in accordance with EN 13501-1 and Commission Delegated Regulation 2016/364
3.3 General aspects related to the performance of the product	The screws have been assessed as having satisfactory durability and serviceability when used in timber structures using the timber species described in Eurocode 5 and subject to the conditions defined by service classes 1, 2 and 3

*) See additional information in section 3.4 – 3..

3.4 Mechanical resistance and stability

The load-carrying capacities for SPAX screws are applicable to the wood-based materials mentioned in paragraph 1 even though the term timber has been used in the following.

The characteristic lateral load-carrying capacities and the characteristic axial withdrawal capacities of SPAX screws or threaded rods should be used for designs in accordance with Eurocode 5 or an appropriate national code.

Point side penetration length must be $\ell_{ef} \geq 4 \cdot d$, where d is the outer thread diameter of the screw or threaded rod. For the fixing of thermal insulation material on top of rafters, point side penetration must be at least 40 mm, $\ell_{ef} \geq 40$ mm.

European Technical Assessments for structural members or wood-based panels must be considered where applicable.

Reductions in the cross-sectional area caused by SPAX screws or threaded rods with a diameter of 10 mm or more shall be taken into account in the member strength verification both, in the tensile and compressive area of members.

For screws in pre-drilled holes, the drill hole diameter should be considered in the member strength verification, for screws driven without pre-drilling, the inner thread diameter.

Lateral load-carrying capacity

The characteristic lateral load-carrying capacity of SPAX screws or threaded rods shall be calculated according to EN 1995-1-1 (Eurocode 5) using the outer thread diameter d as the nominal diameter of the screw. The contribution from the rope effect may be considered.

The characteristic yield moment shall be calculated from:

SPAX screws for $2,5 \text{ mm} \leq d \leq 12,0 \text{ mm}$ made of carbon steel:

$$M_{y,k} = 0,15 \cdot 600 \cdot d^{2,6} \quad [\text{Nmm}]$$

SPAX threaded rods:

$$M_{y,k} = 140000 \quad [\text{Nmm}]$$

SPAX screws for $3,0 \text{ mm} \leq d \leq 12,0 \text{ mm}$ made of stainless steel:

$$M_{y,k} = 0,15 \cdot 400 \cdot d^{2,6} \quad [\text{Nmm}]$$

where

d outer thread diameter [mm]

The embedding strength for screws in non-pre-drilled holes arranged at an angle between screw axis and grain direction, $0^\circ \leq \alpha \leq 90^\circ$ is:

$$f_{h,k} = \frac{0,082 \cdot \rho_k \cdot d^{-0,3}}{2,5 \cdot \cos^2 \alpha + \sin^2 \alpha} \quad [\text{N/mm}^2]$$

for screws in pre-drilled holes:

$$f_{h,k} = \frac{0,082 \cdot \rho_k \cdot (1 - 0,01 \cdot d)}{2,5 \cdot \cos^2 \alpha + \sin^2 \alpha} \quad [\text{N/mm}^2]$$

for threaded rods in pre-drilled holes:

$$f_{h,k} = \frac{0,082 \cdot \rho_k \cdot (1 - 0,01 \cdot d)}{(2,5 \cdot \cos^2 \alpha + \sin^2 \alpha) \cdot (k_{90} \cdot \sin^2 \varepsilon + \cos^2 \varepsilon)} \quad [\text{N/mm}^2]$$

Where

ρ_k characteristic timber density [kg/m^3];

d outer thread diameter [mm];

α angle between screw axis and grain direction;

ε angle between force and grain direction;

k_{90} according to equation (8.33) in EN 1995-1-1.

The embedding strength for screws arranged parallel to the plane of cross laminated timber, independent of the angle between screw axis and grain direction, $0^\circ \leq \alpha \leq 90^\circ$, shall be calculated from:

$$f_{h,k} = 20 \cdot d^{-0,5}$$

[N/mm^2]

unless otherwise specified in the technical specification (ETA or hEN) for the cross laminated timber.

Where

d outer thread diameter [mm]

The embedding strength for screws or threaded rods in the plane surface of cross laminated timber should be assumed as for solid timber based on the characteristic density of the outer layer. If relevant, the angle between force and grain direction of the outer layer should be taken into account.

The direction of the lateral force shall be perpendicular to the screw axis and parallel to the plane surface of the cross laminated timber.

For laterally loaded screws, the rules for multiple fastener connections in EN 1995-1-1, 8.3.1.1 (8) should be applied.

Axial withdrawal capacity

The characteristic axial withdrawal capacity of SPAX screws or threaded rods at an angle of $15^\circ \leq \alpha \leq 90^\circ$ to the grain in solid timber (softwood and hardwood with a maximum characteristic density of 730 kg/m^3), glued laminated timber and cross-laminated timber members or at an angle of $30^\circ \leq \alpha \leq 90^\circ$ to the grain in laminated veneer lumber members (softwood and hardwood with a maximum characteristic density of 750 kg/m^3) shall be calculated according to EN 1995-1-1:2008 from:

$$F_{ax,\alpha,Rk} = \frac{n_{ef} \cdot f_{ax,k} \cdot d \cdot \ell_{ef}}{1,2 \cdot \cos^2 \alpha + \sin^2 \alpha} \cdot \left(\frac{\rho_k}{350} \right)^{0,8} \quad [N]$$

Where

$F_{ax,\alpha,Rk}$	characteristic withdrawal capacity of the screw at an angle α to the grain [N]
n_{ef}	effective number of screws according to EN 1995-1-1:2008
$f_{ax,k}$	Characteristic withdrawal parameter $2,5 \text{ mm} \leq d < 6,0 \text{ mm}$: $f_{ax,k} = 14,0 \text{ N/mm}^2$ $6,0 \text{ mm} \leq d \leq 8,0 \text{ mm}$: $f_{ax,k} = 12,0 \text{ N/mm}^2$ $d = 10,0 \text{ mm}$: $f_{ax,k} = 11,5 \text{ N/mm}^2$ $d = 12,0 \text{ mm}$: $f_{ax,k} = 11,0 \text{ N/mm}^2$ $d = 16,0 \text{ mm}$: $f_{ax,k} = 10,0 \text{ N/mm}^2$
d	outer thread diameter [mm]
ℓ_{ef}	Penetration length of the threaded part according to EN 1995-1-1 [mm]; for the thread under the head including the head length
α	Angle between grain and screw axis
ρ_k	Characteristic density [kg/m^3]

For screws penetrating more than one layer of cross laminated timber, the different layers may be taken into account proportionally.

The axial withdrawal capacity is limited by the head pull-through capacity and the tensile or compressive capacity of the screw or threaded rod.

For SPAX screws or threaded rods, the withdrawal capacity of the thread in the member with the head may be taken into account instead of the head pull-through capacity.

For axially loaded screws in tension, where the external force is parallel to the screw axes, the rules in EN 1995-1-1, 8.7.2 (8) should be applied.

For inclined screws in timber-to-timber or steel-to-timber shear connections, where the screws are arranged under an angle $30^\circ \leq \alpha \leq 60^\circ$ between the shear plane and the screw axis, the effective number of screws n_{ef} should be determined as follows:

For one row of n screws parallel to the load, the load-carrying capacity should be calculated using the effective number of fasteners n_{ef} , where

$$n_{ef} = \max\{n^{0,9}; 0,9 \cdot n\}$$

and n is the number of inclined screws in a row. If crossed pairs of screws are used in timber-to-timber connections, n is the number of crossed pairs of screws in a row.

Note: For screws as compression reinforcement or inclined screws as fasteners in mechanically jointed beams or columns or for the fixing of thermal insulation material, $n_{ef} = n$.

Head pull-through capacity

The characteristic head pull-through capacity of SPAX screws or threaded rods shall be calculated according to EN 1995-1-1:2008 from:

$$F_{ax,\alpha,Rk} = \max\left\{ \frac{f_{ax,k} \cdot d \cdot \ell_{ef}}{1,2 \cdot \cos^2 \alpha + \sin^2 \alpha}; k_t \cdot f_{head,k} \cdot d_h^2 \right\} \cdot n_{ef} \cdot \left(\frac{\rho_k}{350} \right)^{0,8} \quad [N]$$

where:

$F_{ax,\alpha,Rk}$	Characteristic head pull-through capacity of the connection at an angle $\alpha \geq 30^\circ$ to the grain [N]
n_{ef}	Effective number of screws according to EN 1995-1-1:2008 For inclined screws: $n_{ef} = \max\{n^{0,9}; 0,9 \cdot n\}$ (see axial withdrawal capacity)
k_t	Factor taking into account the head side member thickness t_h $k_t = 1$ for $t_h/d_h < 3$ $k_t = 1,3$ for $t_h/d_h \geq 3$
$f_{head,k}$	Characteristic head pull-through parameter [N/mm^2]
d_h	Diameter of the screw head or the washer [mm]. Outer diameter of heads or washers $d_h > 32 \text{ mm}$ shall only be considered with a nominal diameter of 32 mm.
ρ_k	Characteristic density [kg/m^3], for wood-based panels $\rho_k = 380 \text{ kg/m}^3$

Characteristic head pull-through parameter for SPAX screws with countersunk or hexagon head without flange in connections with timber and in connections with wood-based panels with thicknesses above 20 mm:
 $d_h \leq 16 \text{ mm}$: $f_{head,k} = 27,0 - d_h$ [N/mm^2]
 $16 \text{ mm} < d_h \leq 32 \text{ mm}$: $f_{head,k} = 11,0 - 0,2 \cdot (d_h - 16)$ [N/mm^2]

Characteristic head pull-through parameter for SPAX screws with washer head, pan head, hexagon head with flange, countersunk head with washer or with second thread under the head in connections with timber and in connections with wood-based panels with thicknesses above 20 mm:

$$\begin{aligned} d_h \leq 16 \text{ mm}: & \quad f_{\text{head},k} = 29,0 - d_h \text{ [N/mm}^2\text{]} \\ 16 \text{ mm} < d_h \leq 22 \text{ mm}: & \quad f_{\text{head},k} = 13,0 \text{ [N/mm}^2\text{]} \\ 22 \text{ mm} < d_h \leq 32 \text{ mm}: & \quad f_{\text{head},k} = 16,0 - 0,5 \cdot (d_h - 16) \text{ [N/mm}^2\text{]} \end{aligned}$$

Where

d_h head or washer diameter [mm]

Characteristic head pull-through parameter for screws in connections with wood-based panels with thicknesses between 12 mm and 20 mm:

$$f_{\text{head},k} = 8 \text{ N/mm}^2$$

Screws in connections with wood-based panels with a thickness below 12 mm (minimum thickness of the wood based panels of $1,2 \cdot d$ with d as outer thread diameter):

$$f_{\text{head},k} = 8 \text{ N/mm}^2$$

limited to $F_{\text{ax},Rk} = 400 \text{ N}$

For partially threaded screws with smooth shank under the head, the head or washer diameter shall be equal or greater than $1,8 \cdot d_s$, where d_s is the smooth shank or the wire diameter. Otherwise the characteristic head pull-through capacity $F_{\text{ax},\alpha,Rk} = 0$ for screws with a smooth shank under the head.

The minimum thickness of wood-based panels according to the clause 2.1 must be observed.

In steel-to-timber connections the head pull-through capacity is not governing.

Tensile capacity

The characteristic tensile capacity $f_{\text{tens},k}$ of SPAX screws made of carbon steel or threaded rods made of carbon steel or stainless steel is:

$d = 2,5 \text{ mm}:$	1,8 kN
$d = 3,0 \text{ mm}:$	2,6 kN
$d = 3,5 \text{ mm}:$	3,8 kN
$d = 4,0 \text{ mm}:$	5,0 kN
$d = 4,5 \text{ mm or } 4,6 \text{ mm}:$	6,4 kN
$d = 5,0 \text{ mm or } 5,2 \text{ mm}:$	7,9 kN
$d = 5,6 \text{ mm}:$	9,9 kN
$d = 6,0 \text{ mm}:$	11 kN
$d = 7,0 \text{ mm}:$	13 kN
$d = 8,0 \text{ mm}:$	17 kN
$d = 10,0 \text{ mm}:$	28 kN
$d = 12,0 \text{ mm}:$	38 kN

Threaded rods $d = 16 \text{ mm}:$ 63 kN

The characteristic tensile capacity $f_{\text{tens},k}$ of SPAX screws made of stainless steel is:

$d = 3,0 \text{ mm}:$	2,1 kN
$d = 3,5 \text{ mm}:$	2,9 kN
$d = 4,0 \text{ mm}:$	3,8 kN
$d = 4,5 \text{ mm or } 4,6 \text{ mm}:$	4,2 kN
$d = 5,0 \text{ mm or } 5,2 \text{ mm}:$	4,9 kN
$d = 5,6 \text{ mm}:$	6,2 kN
$d = 6,0 \text{ mm}:$	7,1 kN
$d = 7,0 \text{ mm}:$	10 kN
$d = 8,0 \text{ mm}:$	13 kN
$d = 10,0 \text{ mm}:$	20 kN
$d = 12,0 \text{ mm}:$	28 kN

The tear-off capacity of the screw head is greater than the tensile capacity of the screw.

Compressive capacity

The design compressive capacity $F_{\text{ax},Rd}$ of SPAX screws or threaded rods with full thread along the length embedded in timber shall be calculated from:

$$F_{\text{ax},Rd} = \min \left\{ \frac{f_{\text{ax},d} \cdot d \cdot \ell_{\text{ef}}}{1,2 \cdot \cos^2 \alpha + \sin^2 \alpha} \cdot \left(\frac{\rho_k}{350} \right)^{0,8}; \frac{\kappa_c \cdot N_{\text{pl},k}}{\gamma_{M1}} \right\} \text{ [N]}$$

where

$$\kappa_c = \begin{cases} 1 & \text{for } \bar{\lambda}_k \leq 0,2 \\ \frac{1}{k + \sqrt{k^2 - \bar{\lambda}_k^2}} & \text{for } \bar{\lambda}_k > 0,2 \end{cases}$$

$$k = 0,5 \cdot \left[1 + 0,49 \cdot (\bar{\lambda}_k - 0,2) + \bar{\lambda}_k^2 \right]$$

The relative slenderness ratio shall be calculated from:

$$\bar{\lambda}_k = \sqrt{\frac{N_{\text{pl},k}}{N_{\text{ki},k}}}$$

Where

$$N_{\text{pl},k} = \pi \cdot \frac{d_1^2}{4} \cdot f_{y,k} \text{ [N]}$$

is the characteristic value for the axial capacity in case of plastic analysis referred to the inner thread cross section

Characteristic yield strength:

$$f_{y,k} = 1000 \text{ [N/mm}^2\text{]}$$

for SPAX screws made of carbon steel

$$f_{y,k} = 500 \text{ [N/mm}^2\text{]}$$

for SPAX threaded rods and SPAX screws made of stainless steel

Characteristic ideal elastic buckling load:

$$N_{ki,k} = \sqrt{c_h \cdot E_s \cdot I_s} \quad [N]$$

Elastic foundation of the screw:

$$c_h = (0,19 + 0,012 \cdot d) \cdot \rho_k \cdot \left(\frac{\alpha}{180^\circ} + 0,5 \right) \quad [N/mm^2]$$

for screws in cross-laminated timber, the most unfavourable combination of α and ρ_k governs;

Modulus of elasticity:

$$E_s = 210000 \quad [N/mm^2]$$

$$\rho_k = \text{characteristic density} \quad [kg/m^3]$$

Second moment of area:

$$I_s = \frac{\pi}{64} \cdot d_1^4 \quad [mm^4]$$

$$d_1 = \text{inner thread diameter} \quad [mm]$$

(d_2 in the drawings in the annex)

α = angle between grain and screw axis

Note: When determining design values of the compressive capacity it should be considered that $f_{ax,d}$ is to be calculated using k_{mod} and γ_M for timber according to EN 1995 while $N_{pl,d}$ is calculated using $\gamma_{M,1}$ for steel buckling according to EN 1993.

Combined laterally and axially loaded screws or threaded rods

For connections subjected to a combination of axial and lateral load, the following expression should be satisfied:

$$\left(\frac{F_{ax,Ed}}{F_{ax,Rd}} \right)^2 + \left(\frac{F_{la,Ed}}{F_{la,Rd}} \right)^2 \leq 1$$

where

$F_{ax,Ed}$ axial design load of the screw or threaded rod

$F_{la,Ed}$ lateral design load of the screw or threaded rod

$F_{ax,Rd}$ design load-carrying capacity of an axially loaded screw or threaded rod

$F_{la,Rd}$ design load-carrying capacity of a laterally loaded screw or threaded rod

Slip modulus

The axial slip modulus K_{ser} of a screw for the serviceability limit state should be taken independent of angle α to the grain as:

$$C = K_{ser} = 25 \cdot d \cdot \ell_{ef} \quad [N/mm]$$

Where

d outer thread diameter [mm]

ℓ_{ef} penetration length in the structural member [mm]

Compression reinforcement

See annex C.

Tensile reinforcement

See annex D.

Shear reinforcement

See annex E.

Thermal insulation material on top of rafters

See annex F.

3.5 Related aspects of serviceability

3.5.1 Corrosion protection in service class 1, 2 and 3.

The SPAX screws and threaded rods are produced from carbon wire. They are brass-plated, nickel-plated bronze finished or electro-galvanised and e.g. yellow or blue chromated with thicknesses of the zinc coating from 4 – 16 μm or have a zinc flake coating with thicknesses from 10 – 20 μm . Steel no. 1.4016, 1.4062, 1.4401, 1.4567, 1.4578, 1.4529, 1.4539 and 1.4301 is used for screws made from stainless steel.

3.6 General aspects related to the intended use of the product

The screws or threaded rods are manufactured in accordance with the provisions of the European Technical Assessment using the automated manufacturing process as identified during the inspection of the plant by the assessment body issuing the ETA and the approved body and laid down in the technical documentation.

The installation shall be carried out in accordance with Eurocode 5 or an appropriate national code unless otherwise is defined in the following. Instructions from SPAX International GmbH & Co. KG should be considered for installation.

The screws or threaded rods are used for connections in load bearing members of solid timber (softwood), glued laminated timber (softwood), cross-laminated timber (minimum diameter $d = 6,0$ mm), and laminated veneer lumber, similar glued members, wood-based panels or steel members. The screws are also used for connections in load bearing members of solid timber (hardwood) or glued laminated timber (hardwood).

The screws or threaded rods may be used for connections in load bearing timber structures with structural members according to an associated European Technical Assessment, if according to the associated European Technical Assessment of the structural member a connection in load bearing timber structures with screws

according to a European Technical Assessment is allowed.

SPAX fully threaded screws or threaded rods are also used as tensile or compressive reinforcement perpendicular to the grain or as shear reinforcement in softwood members.

Furthermore, the screws with diameters between 6 mm and 12 mm may also be used for the fixing of thermal insulation material on top of rafters.

A minimum of two screws or threaded rods should be used for connections in load bearing timber structures. This does not apply for reinforcements or other situations specified in National Annexes to EN 1995-1-1.

The minimum penetration depth in structural members made of solid, glued or cross-laminated timber is $4 \cdot d$.

Wood-based panels and steel plates should only be arranged on the side of the screw head. The minimum thickness of wood-based panels should be $1,2 \cdot d$. Furthermore, the minimum thickness for following wood-based panels should be:

- Plywood, Fibreboards: 6 mm
- Particleboards, OSB, Cement Particleboards: 8 mm
- Solid wood panels: 12 mm

For structural members according to European Technical Assessments the terms of the European Technical Assessments must be considered.

If screws with an outer thread diameter $d \geq 8$ mm are used in load bearing timber structures, the structural solid or glued laminated timber, laminated veneer lumber and similar glued members must be from spruce, pine or fir. This does not apply for screws or threaded rods in pre-drilled holes.

The screws shall be driven into softwood without pre-drilling or after pre-drilling. The screws shall be driven into hardwood with a maximum characteristic density of 750 kg/m^3 and the threaded rods into softwood after pre-drilling. The drill hole diameters are:

Outer thread diameter	Drill hole diameter	
	Softwood	Hardwood
4,0	2,5	3,0
4,5	3,0	3,0
4,6	3,0	3,0
5,0	3,0	3,5
5,2	3,0	3,5
5,6	3,0	4,0
6,0	4,0	4,0
7,0	4,0	5,0

8,0	5,0	6,0
10,0	6,0	7,0
12,0	7,0	8,0
16,0	13,0	-

The hole diameter in steel members must be predrilled with a suitable diameter.

Only the equipment prescribed by SPAX GmbH & Co. KG shall be used for driving the screws.

In connections with screws with countersunk head according to Annex A the head must be flush with the surface of the connected structural member. A deeper countersink is not allowed.

Unless otherwise specified, minimum thickness for non-predrilled structural members is $t = 24$ mm for screws with outer thread diameter $d < 8$ mm, $t = 30$ mm for screws with outer thread diameter $d = 8$ mm, $t = 40$ mm for screws with outer thread diameter $d = 10$ mm and $t = 80$ mm for screws with outer thread diameter $d = 12$ mm.

Minimum distances from loaded or unloaded ends must be $15 \cdot d$ for screws in non-predrilled holes with outer thread diameter $d \geq 8$ mm and timber thickness $t < 5 \cdot d$.

Minimum distances from the unloaded edge perpendicular to the grain may be reduced to $3 \cdot d$ also for timber thickness $t < 5 \cdot d$, if the spacing parallel to the grain and the end distance is at least $25 \cdot d$.

For Douglas fir members minimum spacing and distances parallel to the grain shall be increased by 50%.

For structural timber members, minimum spacing and distances for screws in predrilled holes are given in EN 1995-1-1:2008 (Eurocode 5) clause 8.3.1.2 and table 8.2 as for nails in predrilled holes. These minimum spacing and distances also apply for SPAX screws with CUT or 4CUT drill tip in non-predrilled holes. Here, the outer thread diameter d must be considered. For SPAX screws with CUT or 4CUT drill tip in non-predrilled holes the following conditions shall be fulfilled:

- $a_1 \geq 5 \cdot d$
- $a_{3,c} \geq 12 \cdot d$
- $a_{3,t} \geq 12 \cdot d$
- minimum cross-section $\geq 40 d^2$
- screws with CUT drill tip:
 $t_{\min} = \max \{5 \cdot d ; 20 \text{ mm}\}$ for $d \leq 6$ mm,
 $t_{\min} = 7 \cdot d$ for $d \geq 8$ mm
- screws with 4CUT drill tip:
 $t_{\min} = \max \{6 \cdot d ; 20 \text{ mm}\}$ for $d \leq 6$ mm,
 $t_{\min} = 7 \cdot d$ for $d \geq 8$ mm

For SPAX screws not fulfilling the above conditions or for screws in laminated veneer lumber, minimum spacing and distances are given in EN 1995-1-1:2008 clause 8.3.1.2 and Table 8.2 as for nails in non-predrilled holes.

Alternatively, minimum distances and spacing for exclusively axially loaded SPAX screws with CUT or 4CUT drill tip or with $d \leq 8$ mm in non-predrilled holes in members of solid timber, glued laminated timber or similar glued products with a minimum thickness $t = 12 \cdot d$ may be taken as:

Spacing a_1 parallel to the grain	$a_1 = 5 \cdot d$
Spacing a_2 perpendicular to the grain	$a_2 = 5 \cdot d$
Distance $a_{3,c}$ from centre of the screw-part in timber to the end grain	$a_{3,c} = 5 \cdot d$
Distance $a_{4,c}$ from centre of the screw-part in timber to the edge	$a_{4,c} = 4 \cdot d$
Distance $a_{4,c}$ from centre of the screw-part in timber to the edge for screws with CUT or 4CUT drill tip only	$a_{4,c} = 3 \cdot d$

Spacing a_2 perpendicular to the grain may be reduced from $5 \cdot d$ to $2,5 \cdot d$, if the condition $a_1 \cdot a_2 \geq 25 \cdot d^2$ is fulfilled.

Alternatively, minimum distances and spacing for exclusively axially loaded SPAX screws in laminated veneer members (softwood) with a minimum thickness $t = 6 \cdot d$ may be taken as:

Spacing a_1 parallel to the grain	$a_1 = 5 \cdot d$
Spacing a_2 perpendicular to the grain	$a_2 = 5 \cdot d$
Distance $a_{3,c}$ from centre of the screw-part in timber to the end grain	$a_{3,c} = 5 \cdot d$
Distance $a_{4,c}$ from centre of the screw-part in timber to the edge	$a_{4,c} = 3 \cdot d$

Spacing a_2 perpendicular to the grain may be reduced from $5 \cdot d$ to $2,5 \cdot d$, if the condition $a_1 \cdot a_2 \geq 25 \cdot d^2$ is fulfilled.

Unless specified otherwise in the technical specification (ETA or hEN) of cross laminated timber, minimum distances and spacing for screws in the plane surface of cross laminated timber members with a minimum thickness $t_{CLT} = 10 \cdot d$ may be taken as (see Annex B):

Spacing a_1 parallel to the grain	$a_1 = 4 \cdot d$
Spacing a_2 perpendicular to the grain	$a_2 = 2,5 \cdot d$
Distance $a_{3,c}$ from centre of the screw-part in timber to the unloaded end grain	$a_{3,c} = 6 \cdot d$
Distance $a_{3,t}$ from centre of the screw-part in timber to the loaded end grain	$a_{3,t} = 6 \cdot d$
Distance $a_{4,c}$ from centre of the screw-part in timber to the unloaded edge	$a_{4,c} = 2,5 \cdot d$
Distance $a_{4,t}$ from centre of the screw-part in	

timber to the loaded edge $a_{4,t} = 6 \cdot d$

Unless specified otherwise in the technical specification (ETA or hEN) of cross laminated timber, minimum distances and spacing for screws in the edge surface of cross laminated timber members with a minimum thickness $t_{CLT} = 10 \cdot d$ and a minimum penetration depth perpendicular to the edge surface of $10 \cdot d$ may be taken as (see Annex B):

Spacing a_1 parallel to the CLT plane	$a_1 = 10 \cdot d$
Spacing a_2 perpendicular to the CLT plane	$a_2 = 4 \cdot d$
Distance $a_{3,c}$ from centre of the screw-part in timber to the unloaded end	$a_{3,c} = 7 \cdot d$
Distance $a_{3,t}$ from centre of the screw-part in timber to the loaded end	$a_{3,t} = 12 \cdot d$
Distance $a_{4,c}$ from centre of the screw-part in timber to the unloaded edge	$a_{4,c} = 3 \cdot d$
Distance $a_{4,t}$ from centre of the screw-part in timber to the loaded edge	$a_{4,t} = 6 \cdot d$

For SPAX screws or threaded rods in predrilled holes the above requirements for minimum thickness do not apply.

For crossed screw couples the minimum spacing between the crossing screws is given in Annex B.

Minimum distances and spacings for SPAX screws in mechanically jointed beams are given in Annex B.

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base


4.1 AVCP system

According to the decision 97/176/EC of the European Commission, as amended, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 3.

5 Technical details necessary for the implementation of the AVCP system, as foreseen in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking.

Issued in Copenhagen on 2024-10-15 by



Thomas Bruun
Managing Director, ETA-Danmark

		Self-tapping screw with full and partial thread															
Flat countersunk head		Material: cold rolled wire according to SPAX - Factory Standard Screws of high carbon steel															
		Optional with and without ribs A: alternatively with CUT-point															
Nominal diameter		2,5	3,0	3,5	4,0	4,5	5,0	6,0									
d1	thread size	2,5	3,1	3,5	4,0	4,5	5,0	6,0									
	permissible tolerance	±0,3															
dk	head diameter	5,1	6,0	7,0	8,0	8,8	9,7	11,6									
	permissible tolerance	±0,5								±0,6							
d2	core diameter	1,7	1,9	2,2	2,5	2,8	3,2	3,8									
	permissible tolerance	-0,30	+0,15/-0,25	-0,30	±0,3												
ds	shank diameter	1,8	2,15	2,45	2,85	3,20	3,55	4,30									
	permissible tolerance	±0,10															
k	head height max.	1,6	1,8	2,1	2,4	2,7	2,9	3,4									
p	thread pitch	1,3	1,5	1,8	2,0	2,2	2,5	3,0									
	permissible tolerance	±0,1 x p															
T-STAR	size	T8	T10	T15 / T20	T20				T25				T30				
Cross recess	size Type Z	1				2				3							
Ls	Standard thread lengths (full thread = lgV / partial thread = lgT)																
Nom.dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	
12	12,0	13,5	10,0														
15	14,0	15,5	12,0		12,5												
16	16,0	17,5	14,0		14,0												
20	18,5	20,5	17,0	12,0	17,0		16,0		16,0								
25	23,5	25,5	22,0	18,0	22,0	18,0	21,0	18,0	21,0		20,0		20,0				
30	28,5	30,5	27,0	18,0	26,0	18,0	25,0	18,0	25,0	18,0	25,0		25,0		24,0		
35	33,5	36,0	22,0	31,0	23,0	30,0	23,0	30,0	23,0	30,0	25,0	30,0	25,0	29,0	24,0		
40	38,5	41,0	22,0	36,0	23,0	35,0	23,0	35,0	23,0	34,0	25,0	35,0	27,0	34,0	24,0		
45	43,5	46,0	28,0	36,0	28,0	40,0	30,0	40,0	30,0	39,0	30,0	39,0	30,0	38,0	29,0		
50	48,5	51,0			28,0	40,0	32,0	45,0	32,0	44,0	32,0	44,0	32,0	43,0	32,0		
55	53,5	56,0			36,0		35,0	50,0	35,0	49,0	37,0	49,0	37,0	48,0	37,0		
60	58,5	61,0					35,0	50,0	35,0	54,0	37,0	54,0	37,0	53,0	37,0		
65	63,5	66,0					40,0		37,5	59,0	42,0	59,0	41,0	58,0	41,0		
70	68,5	71,0							37,5	59,0	42,0	61,0	41,0	61,0	41,0		
75	73,5	76,0							37,5		42,0	61,0	41,0	61,0	41,0		
80	78,5	81,0							37,5		47,0	61,0	46,0	61,0	46,0		
90	88,5	91,5									47,0		61,0		61,0		
100	98,5	101,5											61,0		61,0		
110	108,5	111,5											69,0		68,0		
120	118,5	121,5											69,0		68,0		
130	128,0	132,0													68,0		
140	138,0	142,0													68,0		
150	148,0	152,0															

SPAX[®]-S

Washer head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard

Screws of high carbon steel

Nominal diameter			3,0	3,5	4,0	4,5	5,0	6,0						
d1			thread size	3,1	3,5	4,0	4,5	5,0	6,0					
			permissible tolerance				±0,3							
dk			head diameter	7,9	8,6	9,6	10,6	11,6	13,6					
			permissible tolerance	±0,5			±0,6		±0,68					
dk1			countersink diameter	4,9	4,9	5,0	5,4	5,9	6,9					
			permissible tolerance				-0,2							
dk2			diameter	4,0	5,1	5,2	6,3	6,6	7,5					
			permissible tolerance				±0,3							
d2			core diameter	1,9	2,2	2,5	2,8	3,2	3,8					
			permissible tolerance	+0,15/-0,25	-0,30			±0,3						
ds			shank diameter	2,15	2,45	2,85	3,20	3,55	4,30					
			permissible tolerance				±0,10							
k1			head height max.	1,5	1,8	1,9	2,0	2,2	2,4					
k2			head height max.	0,9	1,0	1,3	1,5	1,5	2,0					
k3			head height max.	1,2	1,3		1,5		1,8					
p			thread pitch	1,5	1,8	2,0	2,2	2,5	3,0					
			permissible tolerance				±0,1 x p							
T-STAR size				T10	T15 / T20		T20	T25	T30					
Cross recess size Type Z							2							
Ls			Standard thread lengths (full thread = lgV / partial thread = lgT)											
Nom.dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
15	14,0	15,5	13,0											
16	16,0	17,5	15,0		15,0									
20	18,5	20,5	18,0	12,5	18,0		18,0							
25	23,5	25,5	23,0	18,0	23,0	18,0	23,0	17,0	22,5		22,0			
30	28,5	30,5	28,0	18,0	27,0	18,0	27,5	18,0	27,5		27,0		27,0	
35	33,5	36,0	33,0	23,0	32,0	23,0	32,5	23,0	32,5	25,0	32,0	25,0	32,0	24,0
40	38,5	41,0	36,0	23,0	37,0	23,0	37,5	23,0	37,0	25,0	37,0	27,0	37,0	24,0
45	43,5	46,0	36,0	28,0	40,0	30,0	42,5	30,0	42,0	30,0	41,0	30,0	41,0	29,0
50	48,5	51,0		28,0		32,0	47,5	32,5	47,0	32,5	46,0	32,0	46,0	32,0
55	53,5	56,0		36,0		35,0	50,0	35,0	52,0	37,0	51,0	37,0	51,0	37,0
60	58,5	61,0				35,0	50,0	35,0	57,0	37,0	56,0	37,0	56,0	37,0
65	63,5	66,0				40,0			37,5	59,0	42,0	61,0	41,0	61,0
70	68,5	71,0						37,5	59,0	42,0	61,0	41,0	61,0	41,0
75	73,5	76,0						37,5		42,0	61,0	41,0	61,0	41,0
80	78,5	81,0						37,5		47,0	61,0	46,0	61,0	46,0
90	88,5	91,5								47,0		61,0		61,0
100	98,5	101,5										61,0		61,0
110	108,5	111,5										69,0		68,0
120	118,5	121,5										69,0		68,0
130	128,0	132,0												68,0
140	138,0	142,0												68,0
150	148,0	152,0												68,0
160	158,0	162,0												68,0

Screws of Ø6,0 mm with partial thread additionally in lenght of 180 to 300 mm, in steps of 20 mm, LgT= 68,0 mm
Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xd1 to max. standard length permitted.

Annex A

SPAX®-S

Raised countersunk head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard

Screws of high carbon steel

Technical drawing of a SPAX-S self-tapping screw. The drawing shows a side view with dimensions: Ls (total length), lgV (full thread length), lgT (partial thread length), dk (head diameter), d1 (thread outer diameter), d2 (core diameter), k (head height), and p (thread pitch). The head is countersunk with a 90° ± 2° angle. The thread has a 40° ± 5° angle. A detail view shows the cross-recess Type Z and the T-STAR or T-STAR plus cross-section. A note indicates 'Optional with and without ribs' and 'A: alternatively with CUT-point'.

Nominal diameter	2,5	3,0	3,5	4,0	4,5	5,0	6,0
d1 thread size	2,5	3,1	3,5	4,0	4,5	5,0	6,0
permissible tolerance	±0,3						
dk head diameter	5,1	6,0	7,0	8,0	8,8	9,7	11,6
permissible tolerance	±0,5			±0,6			
d2 core diameter	1,7	1,9	2,2	2,5	2,8	3,2	3,8
permissible tolerance	-0,30	+0,15/-0,25	-0,30	±0,3			
ds shank diameter	1,8	2,15	2,45	2,85	3,20	3,55	4,30
permissible tolerance	±0,10						
k head height max.	1,6	1,8	2,1	2,4	2,7	2,9	3,4
p thread pitch	1,3	1,5	1,8	2,0	2,2	2,5	3,0
permissible tolerance	±0,1 x p						

T - STAR size	T8	T10	T15 / T20	T20	T25	T30
Gross recess size Type Z	1		2			3

Ls			Standard thread lengths (full thread = lgV / partial thread = lgT)															
Nom. dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT		
12	12,0	13,5	10,0															
15	14,0	15,5	12,0		12,5													
16	16,0	17,5	14,0		14,0													
20	18,5	20,5	17,0	12,0	17,0	12,5	16,0		16,0									
25	23,5	25,5	22,0	18,0	22,0	18,0	21,0	18,0	21,0		20,0		20,0					
30	28,5	30,5		18,0	26,0	18,0	25,0	18,0	25,0	18,0	25,0		25,0		24,0			
35	33,5	36,0		22,0	31,0	23,0	30,0	23,0	30,0	22,5	30,0	25,0	30,0	25,0	29,0			
40	38,5	41,0		22,0	36,0	23,0	35,0	23,0	35,0	22,5	34,0	25,0	35,0	27,0	34,0	24,0		
45	43,5	46,0		28,0	36,0	28,0	40,0	30,0	40,0	30,0	39,0	30,0	39,0	30,0	38,0	29,0		
50	48,5	51,0				28,0	40,0	32,0	45,0	32,0	44,0	32,0	44,0	32,0	43,0	32,0		
55	53,5	56,0				36,0		35,0	50,0	35,0	49,0	37,0	49,0	37,0	48,0	37,0		
60	58,5	61,0						35,0	50,0	35,0	54,0	37,0	54,0	37,0	53,0	37,0		
65	63,5	66,0						40,0		37,5	59,0	42,0	59,0	41,0	58,0	41,0		
70	68,5	71,0								37,5	59,0	42,0	61,0	41,0	61,0	41,0		
75	73,5	76,0								37,5		42,0	61,0	41,0	61,0	41,0		
80	78,5	81,0								37,5		47,0	61,0	46,0	61,0	46,0		
90	88,5	91,5										47,0		61,0		61,0		
100	98,5	101,5												61,0		61,0		
110	108,5	111,5												69,0		68,0		
120	118,5	121,5												69,0		68,0		
130	128,0	132,0														68,0		
140	138,0	142,0														68,0		
150	148,0	152,0														68,0		
160	158,0	162,0														68,0		

Screws of Ø6,0 mm with partial thread additionally in length of 180 to 300 mm, in steps of 20 mm, LgT= 68,0 mm

Other thread lengths in the range ≥4xdl to max. standard length permitted.

Intermediate lengths on Ls possible

Annex A5

SPAX®-S

Pan head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard

Screws of high carbon steel

Nominal diameter			2,5	3,0	3,5	4,0	4,5	5,0	6,0							
d1	thread size		2,5	3,1	3,5	4,0	4,5	5,0	6,0							
	permissible tolerance		±0,3													
dk	head diameter		5,0	6,0	7,0	8,0	9,0	9,9	11,9							
	permissible tolerance		±0,5						±0,6							
d2	core diameter		1,7	1,9	2,2	2,5	2,8	3,2	3,8							
	permissible tolerance		-0,30	+0,15/-0,25	-0,30	±0,3										
ds	shank diameter		1,8	2,15	2,45	2,85	3,20	3,55	4,30							
	permissible tolerance		±0,10													
k	head height max.		2,1	2,3	2,7	2,9	3,1	3,4	4,0							
p	thread pitch		1,3	1,5	1,8	2,0	2,2	2,5	3,0							
	permissible tolerance		±0,1 x p													
T-STAR size			T8	T10	T15 / T20	T20	T25	T30								
Cross recess size Type Z			1	2				3								
Ls			Standard thread lengths (full thread = lgV / partial thread = lgT)													
Nom. dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
12	12,0	13,5	12,0													
15	14,0	15,5	13,0		13,0											
16	16,0	17,5	15,0		15,0		15,0									
20	18,5	20,5	18,0	12,0	18,0		18,0		18,0							
25	23,5	25,5	23	18,0	23,0		23,0	18,0	23,0		22,5		22,0			
30	28,5	30,5	28,0	18,0	28,0	18,0	27,0	18,0	27,5	18,0	27,5		27,0		27,0	
35	33,5	36,0		22,0	33,0	23,0	32,0	23,0	32,5	23,0	32,5	25,0	32,0	25,0	32,0	24,0
40	38,5	41,0		22,0	36,0	23,0	37,0	23,0	37,5	23,0	37,0	25,0	37,0	27,0	37,0	24,0
45	43,5	46,0		28,0	36,0	28,0		30,0	42,5	30,0	42,0	30,0	41,0	30,0	41,0	29,0
50	48,5	51,0				28,0		32,0	47,5	32,5	47,0	32,5	46,0	32,0	46,0	32,0
55	53,5	56,0				36,0		35,0	50,0	35,0	52,0	37,0	51,0	37,0	51,0	37,0
60	58,5	61,0						35,0	50,0	35,0	57,0	37,0	56,0	37,0	56,0	37,0
65	63,5	66,0						40,0		37,5	59,0	42,0	61,0	41,0	60,0	41,0
70	68,5	71,0								37,5	59,0	42,0	61,0	41,0	60,0	41,0
75	73,5	76,0								37,5		42,0	61,0	41,0	60,0	41,0
80	78,5	81,0								37,5		47,0	61,0	46,0	60,0	46,0
90	88,5	91,5										47,0		61,0		61,0
100	98,5	101,5												61,0		61,0
110	108,5	111,5													69,0	68,0
120	118,5	121,5													69,0	68,0
130	128,0	132,0														68,0
140	138,0	142,0														68,0
150	148,0	152,0														68,0
160	158,0	162,0														68,0

Screws of Ø6,0 mm with partial thread additionally in lenght of 180 to 300 mm, in steps of 20 mm, LgT= 68,0 mm

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xdl to max. standard length permitted.

Annex A7

SPAX®-S
Pan head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard

Screws of high carbon steel

Manufacturer's trade mark

A: alternatively with CUT-point

Nominal diameter	7,0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
------------------	-----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

SPAX®-S

Countersunk head with cutting ribs

Self-tapping screw with double thread

Material: cold rolled wire according to SPAX - Factory standard

Screws of high carbon steel

Manufacturer's trade mark


A: alternatively with
CUT-point

Nominal diameter			4,0	4,5		
d1	thread size		4,0	4,5		
	permissible tolerance			±0,3		
dk	head diameter		8,0	8,8		
	permissible tolerance		±0,5	±0,6		
d2	core diameter		2,5	2,8		
	permissible tolerance			±0,3		
ds	shank diameter		2,85	3,20		
	permissible tolerance			±0,10		
k	head height max.		2,4	2,7		
p	thead pitch		3,3	3,5		
	permissible tolerance			±0,1 x p		
T - STAR	size			T20		
Cross recess size Type Z				2		
Ls			Standard thread lengths (partial thread = lgT)			
Nom. dim.	min	max	lgT	lgT		
35	33,5	36,0	22,5	24,0		
40	38,5	41,0	22,5	24,0		
45	43,5	46,0	30,0	29,0		
50	48,5	51,0	30,0	29,0		
55	53,5	56,0	35,0	34,0		
60	58,5	61,0	35,0	34,0		
65	63,5	66,0	37,5	42,0		
70	68,5	71,0	37,5	42,0		
75	73,5	76,0	50,0	49,0		
80	78,5	81,0		49,0		
90	88,5	91,5		49,0		

Intermediate lengths on Ls possible

Other thread lengths in the range $\geq 4 \times d_1$
to max. standard length permitted

Annex A9

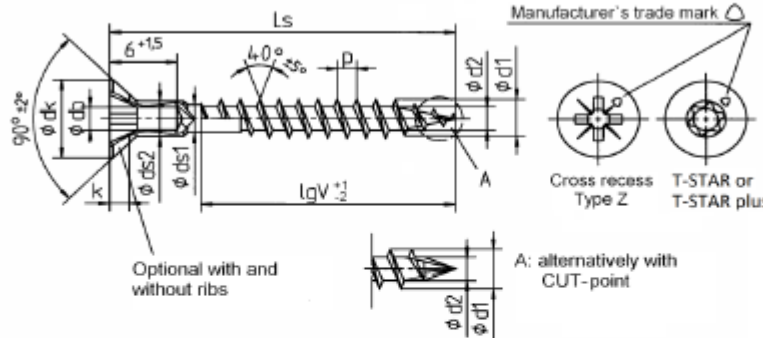			Self-tapping screw with full thread			
Countersunk with head hole			Material: cold rolled wire according to SPAX - Factory Standard			
			Screws of high carbon steel			
						
Nominal diameter			4,0	4,5	5,0	6,0
d1	thread size		4,0	4,5	5,0	6,0
	permissible tolerance			± 0,3		
dk	head diameter		8,0	8,8	9,7	11,6
	permissible tolerance		±0,5		±0,6	
db	hole diameter			2,50		
	permissible tolerance			± 0,15		
d2	core diameter		2,5	2,8	3,2	3,8
	permissible tolerance			±0,3		
ds1	shank diameter		2,85	3,20	3,55	4,30
	permissible tolerance			± 0,10		
ds2	shank diameter		3,60	3,80	4,10	ohne
	permissible tolerance		±0,10		±0,2	
k	head height max.		2,4	2,7	2,9	3,4
p	thread pitch		2,0	2,2	2,5	3,0
	permissible tolerance			± 0,1 x p		
Cross recess size Z			2		3	
T-STAR (plus) size			T20		T30	
Ls			Standard thread lengths (full thread = lgV)			
Nom dim.	min	max	lgV	lgV	lgV	lgV
25	23,5	26,0	18,0			
30	28,5	31,0	23,0	20,0		
35	33,5	36,0	27,5	25,0		
40	38,5	41,0	32,5	30,0	30,0	
45	43,5	46,0	37,5	34,0	35,0	
50	48,5	51,0	42,5	39,0	39,0	41,0
55	53,5	56,0	47,5	44,0	44,0	46,0
60	58,5	61,0	50,0	49,0	49,0	51,0
65	63,5	66,0		54,0	54,0	56,0
70	68,5	71,0		59,0	61,0	61,0
75	73,5	76,0		59,0	61,0	61,0
80	78,5	81,0		59,0	61,0	61,0
90	88,5	91,5		59,0	61,0	61,0
100	98,5	101,5			61,0	61,0
110	108,5	111,5			69,0	68,0
120	118,5	121,5			69,0	68,0
130	128,0	132,0				68,0
140	138,0	142,0				68,0
150	148,0	152,0				68,0
160	158,0	162,0				68,0
Screw of Ø 6,0 mm with partial thread additionally in lengths of 180 to 300 mm , in steps of 20 mm, lgV = 68,0 mm			Other thead lengths in the range ≥4xdl to max. standard length permitted			
Intermediate lengths on Ls possible						
			Annex A10			

SPAX®-S

Washer head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard

Stainless steel screws

Nominal diameter			3,0	3,5	4,0	4,5	5,0	6,0															
d1	thread size		3,0	3,5	4,0	4,5	5,1	6,1															
	permissible tolerance					±0,3																	
dk	head diameter		7,9	8,6	9,6	10,6	11,6	13,6															
	permissible tolerance		±0,5			±0,6		±0,65															
dk1	countersunk diameter		4,9	4,9	5,0	5,4	5,9	6,9															
	permissible tolerance				+0,20																		
dk2	diameter		4,0	5,1	5,2	6,3	6,6	7,5															
	permissible tolerance				±0,3																		
d2	core diameter		2,1	2,4	2,8	3,0	3,4	3,8															
	permissible tolerance		-0,30			±0,3																	
ds	shank diameter		2,25	2,60	3,00	3,30	3,75	4,30															
	permissible tolerance				±0,10																		
k1	head height max.		1,5	1,8	1,9	2,0	2,2	2,4															
k2	head height max.		0,9	1,0	1,3	1,5	1,5	2,0															
k3	head height max.		1,2	1,3		1,5		1,8															
p	thread pitch		1,5	1,8	2,0	2,2	2,5	3,0															
	permissible tolerance					±0,1 x p																	
T - STAR size			T10		T15 / T20		T20		T25		T30												
Cross recess size Type Z			2																				
Ls			Standard thread lengths (full thread = lgV / partial thread = lgT)																				
Nom. dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT									
12	12,0	13,5	13,0																				
15	16,0	17,5	14,0																				
16	16,0	17,5	15,0	15,0																			
20	18,5	20,5	18,0	12,5	18,0	18,0																	
25	23,5	25,5	23,0	18,0	23,0	18,0	23,0		22,5		22,0												
30	28,5	30,5	28,0	18,0	27,0	18,0	27,5	18,0	27,5		27,0		27,0										
35	33,5	36,0	33,0	23,0	32,0	23,0	32,5	23,0	32,5	25,0	32,0	25,0	32,0	24,0									
40	38,5	41,0	36,0	23,0	37,0	23,0	37,5	23,0	37,0	25,0	37,0	27,0	37,0	24,0									
45	43,5	46,0	36,0	28,0		30,0	42,5	30,0	42,0	30,0	41,0	30,0	41,0	29,0									
50	48,5	51,0		28,0		32,0	47,5	32,5	47,0	32,5	46,0	32,0	46,0	32,0									
55	53,5	56,0		36,0		35,0	50,0	35,0	52,0	37,0	51,0	37,0	51,0	37,0									
60	58,5	61,0				35,0	50,0	35,0	57,0	37,0	56,0	37,0	56,0	37,0									
65	63,5	66,0				40,0		37,5	59,0	42,0	61,0	41,0	61,0	41,0									
70	68,5	71,0						37,5	59,0	42,0	61,0	41,0	61,0	41,0									
75	73,5	76,0						37,5		42,0	61,0	41,0	61,0	41,0									
80	78,5	81,0						37,5		47,0	61,0	46,0	61,0	46,0									
90	88,5	91,5								47,0		61,0		61,0									
100	98,5	101,5										61,0		61,0									
110	108,5	111,5										69,0		68,0									
120	118,5	121,5										69,0		68,0									
130	128,5	131,5												68,0									
140	138,5	141,5												68,0									
150	148,5	151,5												68,0									
160	158,5	161,5												68,0									

Intermediate lengths on Ls possible

Other thread lengths in the range $\geq 4 \times d1$
to max. standard length permitted.

Annex A13

SPAX®-S
Washer head

Self-tapping screw with full and partial thread
Material: cold rolled wire according to SPAX - Factory Standard
Stainless steel screw

Manufacturer's trade mark


T-STAR or T-STAR plus

A: alternatively with CUT-point

Nominal diameter		7,0							
d1	thread size	7,1							
	permissible tolerance	+0,35							
dk	head diameter	18,0							
	permissible tolerance	+0,9							
dk1	contersink diameter	7,8							
	permissible tolerance	-0,30							
d2	core diameter	4,5							
	permissible tolerance	+0,3							
ds	shank diameter	4,90							
	permissible tolerance	+0,10							
k	head height max.	3,7							
p	thread pitch	3,5							
	permissible tolerance	+0,1 x p							
T - STAR	size	T30							
Ls	Standard thread lengths (full thread = lgV / partial thread = lgT)								
Nom.dim.	min	max	lgV	lgT					
50	48,5	51,0	46,0	33,0					
55	53,5	56,0	51,0	33,0					
60	58,5	61,0	56,0	38,0					
65	63,5	66,0	61,0	38,0					
70	68,5	71,0	61,0	43,0					
75	73,5	76,0	68,0	43,0					
80	78,5	81,0	68,0	48,0					
90	88,5	91,5	68,0	53,0					
100	98,5	101,5	68,0	58,0					
110	108,5	111,5		68,0					
120	118,5	121,5		68,0					

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xd1 to max. standard length permitted.




SPAX®-S
Raised countersunk head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard

Stainless steel screws

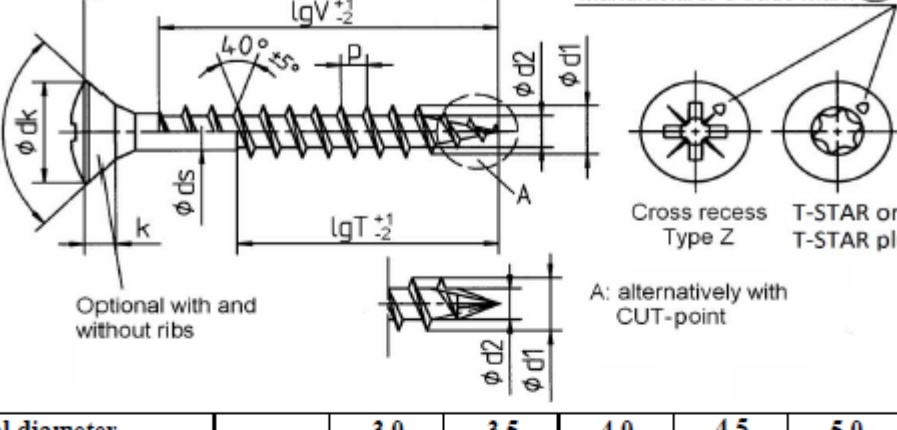

Nominal diameter		3,0	3,5	4,0	4,5	5,0	6,0
d1	thread size	3,0	3,5	4,0	4,5	5,1	6,1
	permissible tolerance	±0,3					
dk	head diameter	6,0	7,0	8,0	8,8	9,7	11,6
	permissible tolerance	±0,5			±0,6		
d2	core diameter	2,1	2,4	2,8	3,0	3,4	3,8
	permissible tolerance	-0,30	±0,3				
ds	shank diameter	2,25	2,60	3,00	3,30	3,75	4,30
	permissible tolerance	±0,10					
k	head height max.	1,8	2,1	2,4	2,7	2,9	3,4
p	thread pitch	1,5	1,8	2,0	2,2	2,5	3,0
	permissible tolerance	±0,1 x p					
T - STAR size		T10	T15 / T20		T20		T25
Cross recess size Type Z		1	2				3

Ls			Standard thread lengths (full thread = lgV / partial thread = lgT)											
Nom. dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
15	14,0	15,5	12,5											
16	16,0	17,5	14,0											
20	18,5	20,5	17,0	12,5	16,0		16,0							
25	23,5	25,5	22,0	18,0	21,0	18,0	21,0		20,0		20,0			
30	28,5	30,5	26,0	18,0	25,0	18,0	25,0	18,0	25,0		25,0		24,0	
35	33,5	36,0	31,0	23,0	30,0	23,0	30,0	23,0	30,0	25,0	30,0	25,0	29,0	24,0
40	38,5	41,0	36,0	23,0	35,0	23,0	35,0	23,0	34,0	25,0	35,0	27,0	34,0	24,0
45	43,5	46,0	36,0	28,0	40,0	30,0	40,0	30,0	39,0	30,0	39,0	30,0	38,0	29,0
50	48,5	51,0		28,0	40,0	32,0	45,0	32,5	44,0	32,5	44,0	32,0	43,0	32,0
55	53,5	56,0		36,0		35,0	50,0	35,0	49,0	37,0	49,0	37,0	48,0	37,0
60	58,5	61,0				35,0	50,0	35,0	54,0	37,0	54,0	37,0	53,0	37,0
65	63,5	66,0				40,0		37,5	59,0	42,0	59,0	41,0	58,0	41,0
70	68,5	71,0						37,5	59,0	42,0	61,0	41,0	61,0	41,0
75	73,5	76,0						37,5		42,0	61,0	41,0	61,0	41,0
80	78,5	81,0						37,5		47,0	61,0	46,0	61,0	46,0
90	88,5	91,5							47,0			61,0		61,0
100	98,5	101,5										61,0		61,0
110	108,5	111,5										69,0		68,0
120	118,5	121,5										69,0		68,0
130	128,0	132,0												68,0
140	138,0	142,0												68,0
150	148,0	152,0												68,0
160	158,0	162,0												68,0

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xdl to max. standard length permitted.

Annex A15

SPAX®-S

Raised countersunk head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard

Stainless steel screw

Optional with and without ribs

A: alternatively with CUT-point

Nominal diameter	7,0								
d1	thread size	7,1							
	permissible tolerance	+0,35							
dk	head diameter	13,1							
	permissible tolerance	+0,65							
d2	core diameter	4,5							
	permissible tolerance	+0,3							
ds	shank diameter	4,90							
	permissible tolerance	+0,10							
k	head height max.	3,8							
p	thread pitch	3,5							
	permissible tolerance	+0,1 x p							
T - STAR size		T30							
Cross recess size Type Z		3							

Ls			Standard thread lengths (full thread = lgV / partial thread = lgT)							
Nom dim.	min	max	lgV	lgT						
40	38,5	41,0	33,0							
45	43,5	46,0	38,0							
50	48,5	51,0	43,0	33,0						
55	53,5	56,0	48,0	33,0						
60	58,5	61,0	53,0	38,0						
65	63,5	66,0	58,0	38,0						
70	68,5	71,0	61,0	43,0						
75	73,5	76,0	68,0	43,0						
80	78,5	81,0	68,0	48,0						
90	88,5	91,5	68,0	53,0						
100	98,5	101,5	68,0	58,0						
110	108,5	111,5		68,0						
120	118,5	121,5		68,0						

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xd1 to max. standard length permitted.

SPAX®-S
Pan head

Self-tapping screw with full and partial thread
Material: cold rolled wire according to SPAX - Factory Standard
Stainless steel screws

A: alternatively with CUT-point

Nominal diameter			3,0		3,5		4,0		4,5		5,0		6,0			
d1	thread size		3,0		3,5		4,0		4,5		5,1		6,1			
	permissible tolerance		±0,3													
dk	head diameter		6,0		7,0		8,0		9,0		9,9		11,9			
	permissible tolerance		±0,5													
d2	core diameter		2,1		2,4		2,8		3,0		3,4		3,8			
	permissible tolerance		-0,30													
ds	shank diameter		2,25		2,60		3,00		3,30		3,75		4,30			
	permissible tolerance		±0,10													
k	head height max.		2,3		2,5		2,9		3,1		3,4		4,0			
p	thread pitch		1,5		1,8		2,0		2,2		2,5		3,0			
	permissible tolerance		±0,1 x p													
T - STAR size			T10		T15 / T20		T20		T25		T30					
Cross recess size Type Z			1		2		3									
Ls			Standard thread lengths (full thread = lgV / partial thread = lgT)													
Nom.dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
15	14,0	15,5	13,0													
16	16,0	17,5			15,0											
20	18,5	20,5	18,0	12,5	18,0		18,0									
25	23,5	25,5	23,0	18,0	23,0	18,0	23,0		22,5		22,0					
30	28,5	30,5	28,0	18,0	27,0	18,0	27,5	18,0	27,5		27,0		27,0			
35	33,5	36,0	33,0	23,0	32,0	23,0	32,5	23,0	32,5	25,0	32,0	25,0	32,0	24,0		
40	38,5	41,0	36,0	23,0	37,0	23,0	37,5	23,0	37,0	25,0	37,0	27,0	37,0	24,0		
45	43,5	46,0	36,0	28,0		30,0	42,5	30,0	42,0	30,0	41,0	30,0	41,0	29,0		
50	48,5	51,0			28,0	32,0	47,5	32,5	47,0	32,5	46,0	32,0	46,0	32,0		
55	53,5	56,0		36,0		35,0	50,0	35,0	52,0	37,0	51,0	37,0	51,0	37,0		
60	58,5	61,0				35,0	50,0	35,0	57,0	37,0	56,0	37,0	56,0	37,0		
65	63,5	66,0				40,0		37,5	59,0	42,0	61,0	41,0	60,0	41,0		
70	68,5	71,0						37,5	59,0	42,0	61,0	41,0	60,0	41,0		
75	73,5	76,0						37,5		42,0	61,0	41,0	60,0	41,0		
80	78,5	81,0							37,5	47,0	61,0	46,0	60,0	46,0		
90	88,5	91,5								47,0		61,0		61,0		
100	98,5	101,5										61,0		61,0		
110	108,5	111,5										69,0		68,0		
120	118,5	121,5										69,0		68,0		
130	128,0	132,0												68,0		
140	138,0	142,0												68,0		
150	148,0	152,0												68,0		
160	158,0	162,0												68,0		

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xd1 to max. standard length permitted.

Annex A17

[illegible]

SPAX®
Flat countersunk head

Self-tapping screw with full and partial thread
Material: cold rolled wire according to SPAX - Factory Standard
Screws of high carbon steel

Cross section A - B

4CUT-point
Square point
in core

Optional with or without ribs

C: alternatively with 4CUT-cutter*

D: 4CUT-point

Manufacturer's
trade mark
"SPAX"

Cross recess
Type Z

T-STAR
plus

Nominal diameter				3,5	4,0	4,5	5,0	6,0					
d1	thread size			3,5	4,0	4,5	5,0	6,0					
	permissible tolerance					±0,3							
dk	head diameter			7,0	8,0	8,8	9,6	11,6					
	permissible tolerance			±0,5		±0,6							
d2	core diameter			2,25	2,6	2,9	3,2	3,9					
	permissible tolerance			+0,1/-0,3		±0,3							
ds	shank diameter			2,45	2,85	3,20	3,55	4,30					
	permissible tolerance			±0,10									
k	head height max.			2,1	2,4	2,7	2,9	3,4					
p	thread pitch			2,1	2,4	2,7	3,0	3,6					
	permissible tolerance			±0,1 x p									
T-STAR plus size				T15 / T20		T20		T30					
Cross recess size Type Z				2				3					
Ls		Standard thread lengths (full thread = lgV / partial thread = lgT)											
Nom.dim.	min	max		lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
20	18,5	20,5		16,0	16,0								
25	23,5	25,5		21,0	18,0	21,0		20,0		20,0			
30	28,5	30,5		25,0	18,0	25,0	18,0	25,0		25,0		24,0	
35	33,5	36,0		30,0	23,0	30,0	23,0	30,0	25,0	30,0	25,0	29,0	24,0
40	38,5	41,0		35,0	23,0	35,0	23,0	34,0	25,0	35,0	27,0	34,0	24,0
45	43,5	46,0		40,0	30,0	40,0	30,0	39,0	30,0	39,0	30,0	38,0	29,0
50	48,5	51,0		40,0	32,0	45,0	32,5	44,0	32,5	44,0	32,0	43,0	32,0
55	53,5	56,0			35,0	50,0	35,0	49,0	37,0	49,0	37,0	48,0	37,0
60	58,5	61,0			35,0	50,0	35,0	54,0	37,0	54,0	37,0	53,0	37,0
65	63,5	66,0			40,0	50,0	37,5	59,0	42,0	59,0	41,0	58,0	41,0
70	68,5	71,0				50,0	37,5	64,0	42,0	64,0	41,0	61,0	41,0
75	73,5	76,0				50,0	37,5	69,0	42,0	69,0	41,0	61,0	41,0
80	78,5	81,0				50,0	37,5	74,0	47,0	74,0	46,0	61,0	46,0
90	88,5	91,5						84,0	47,0	84,0	61,0		61,0
100	98,5	101,5								94,0	61,0		61,0
110	108,5	111,5								104,0	69,0*		68,0*
120	118,5	121,5								114,0	69,0*		68,0*
130	128,0	132,0											68,0*
140	138,0	142,0											68,0*
150	148,0	152,0											68,0*
160	158,0	162,0											68,0*

Screws of Ø6,0 mm with partial thread additionally in lengths
of 180 to 300 mm, in steps of 20 mm, LgT= 68,0 mm*

Other thread lengths in the range ≥4xdl
to max. standard length permitted.

Intermediate lengths on Ls possible

* Design C with LgT= max. 65,0 mm

Annex A19



SPAX®
Washer head


Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard

Screws of high carbon steel

Cross section A-B

4CUT-point: square point in core

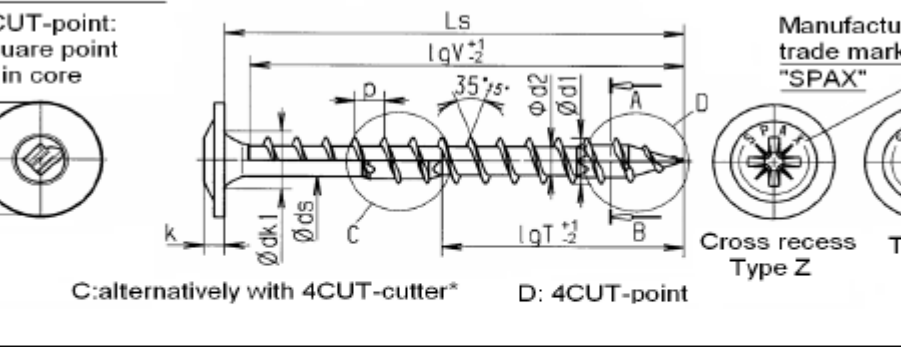

C: alternatively with 4CUT-cutter* D: 4CUT-point

Cross recess Type Z T-STAR plus

Nominal diameter		3,5	4,0	4,5	5,0	6,0
d1	thread size	3,5	4,0	4,5	5,0	6,0
	permissible tolerance	±0,3				
dk	head diameter	8,6	9,6	10,6	11,6	13,6
	permissible tolerance	±0,6				
dk1	countersink diameter	4,9	5,0	5,4	5,9	6,9
	permissible tolerance	+0,20				
d2	core diameter	2,25	2,6	2,9	3,2	3,9
	permissible tolerance	+0,1/-0,3 ±0,3				
ds	shank diameter	2,45	2,85	3,2	3,55	4,3
	permissible tolerance	±0,10				
k	head height max.	1,8	1,9	2,0	2,2	3,1
p	thread pitch	2,1	2,4	2,7	3,0	3,6
	permissible tolerance	±0,1 x p				
T-STAR plus size		T15 / T20		T20		T30
Cross recess size Type Z		2				

Ls			Standard thread lengths (full thread = lgV / partial thread = lgT)									
Nom.dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
16	16,0	17,5	15,0									
20	18,5	20,5	18,0		18,0							
25	23,5	25,5	23,0	18,0	23,0		22,5		22,0			
30	28,5	30,5	27,0	18,0	27,5	18,0	27,5		27,0		27,0	
35	33,5	36,0	32,0	23,0	32,5	23,0	32,5	25,0	32,0	25,0	32,0	24,0
40	38,5	41,0	37,0	23,0	37,5	23,0	37,0	25,0	37,0	27,0	37,0	24,0
45	43,5	46,0	40,0	30,0	42,5	30,0	42,0	30,0	41,0	30,0	41,0	29,0
50	48,5	51,0	40,0	32,0	47,5	32,5	47,0	32,5	46,0	32,0	46,0	32,0
55	53,5	56,0		35,0	50,0	35,0	52,0	37,0	51,0	37,0	51,0	37,0
60	58,5	61,0		35,0	50,0	35,0	57,0	37,0	56,0	37,0	56,0	37,0
65	63,5	66,0		40,0	50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0
70	68,5	71,0			50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0
75	73,5	76,0			50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0
80	78,5	81,0					59,0	47,0	61,0	46,0	61,0	46,0
90	88,5	91,5					59,0	47,0		61,0		61,0
100	98,5	101,5								61,0		61,0
110	108,5	111,5								69,0*		68,0*
120	118,5	121,5								69,0*		68,0*
130	128,0	132,0										68,0*
140	138,0	142,0										68,0*
150	148,0	152,0										68,0*
160	158,0	162,0										68,0*


Screws of Ø6,0 mm with partial thread additionally in lengths of 180 to 300 mm, in steps of 20 mm, LgT= 68,0 mm*

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xd1 to max. standard length permitted.

* Design C with lgT= max. 65,0 mm

Annex A20



SPAX®
Raised countersunk head


Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard

Screws of high carbon steel

Cross section A - B

4CUT-point:
Square point
in core

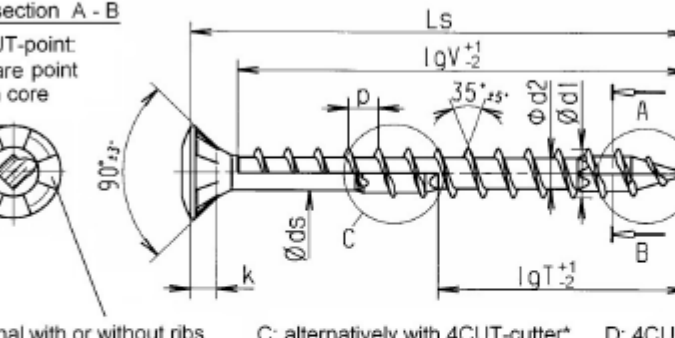

Manufacturer's
trade mark
"SPAX"
 Cross recess
Type Z
 T - STAR
plus

Nominal diameter		3,5	4,0	4,5	5,0	6,0
d1	thread size	3,5	4,0	4,5	5,0	6,0
	permissible tolerance	±0,3				
dk	head diameter	7,0	8,0	8,8	9,7	11,6
	permissible tolerance	±0,5				
d2	core diameter	2,25	2,6	2,9	3,2	3,9
	permissible tolerance	+0,1/-0,3				
ds	shank diameter	2,45	2,85	3,2	3,55	4,3
	permissible tolerance	±0,10				
k	head height max.	2,1	2,4	2,7	2,9	3,4
p	thread pitch	2,1	2,4	2,7	3,0	3,6
	permissible tolerance	±0,1 x p				
T-STAR plus size		T15 / T20		T20		T30
Cross recess size Type Z		2				3

Ls Nom.dim.	min	max	Standard thread lengths (full thread = lgV / partial thread = lgT)											
			lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
20	18,5	20,5	16,0		16,0									
25	23,5	25,5	21,0	18,0	21,0		20,0		20,0					
30	28,5	30,5	25,0	18,0	25,0	18,0	25,0		25,0				24,0	
35	33,5	36,0	30,0	23,0	30,0	23,0	30,0	25,0	30,0	25,0	29,0			
40	38,5	41,0	35,0	23,0	35,0	23,0	34,0	25,0	35,0	27,0	34,0	24,0		
45	43,5	46,0	40,0	30,0	40,0	30,0	39,0	30,0	39,0	30,0	38,0	29,0		
50	48,5	51,0	40,0	32,0	45,0	32,5	44,0	32,5	44,0	32,0	43,0	32,0		
55	53,5	56,0		35,0	50,0	35,0	49,0	37,0	49,0	37,0	48,0	37,0		
60	58,5	61,0		35,0	50,0	35,0	54,0	37,0	54,0	37,0	53,0	37,0		
65	63,5	66,0		40,0	50,0	37,5	59,0	42,0	59,0	41,0	58,0	41,0		
70	68,5	71,0			50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0		
75	73,5	76,0			50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0		
80	78,5	81,0			50,0	37,5	59,0	47,0	61,0	46,0	61,0	46,0		
90	88,5	91,5					59,0	47,0		61,0		61,0		
100	98,5	101,5								61,0		61,0		
110	108,5	111,5								69,0*		68,0*		
120	118,5	121,5								69,0*		68,0*		
130	128,0	132,0										68,0*		
140	138,0	142,0										68,0*		
150	148,0	152,0										68,0*		
160	158,0	162,0										68,0*		

Screws of Ø6,0 mm with partial thread additionally in lengths of 180 to 300 mm, in steps of 20 mm, LgT= 68,0 mm*

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xdl to max. standard length permitted.

* Design C with LgT= max. 65,0 mm

Annex A21



SPAX®

Pan head


Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard

Screws of high carbon steel

Cross section A - B

4CUT-point:
Square point
in core

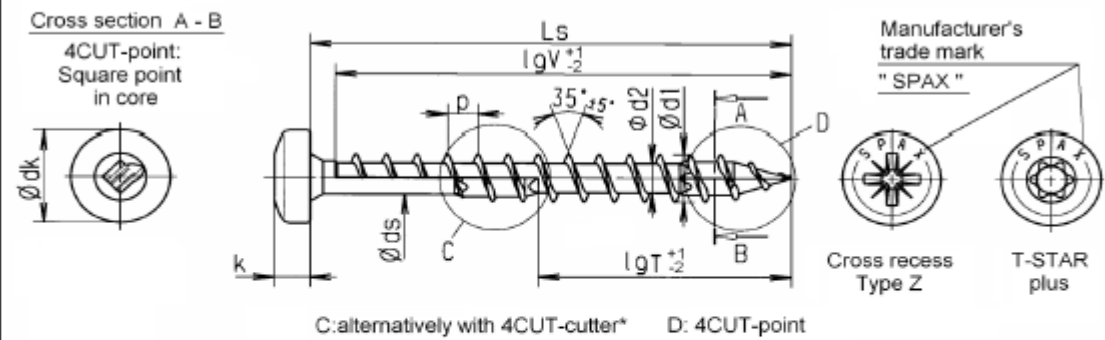

C: alternatively with 4CUT-cutter* D: 4CUT-point

Nominal diameter		3,5	4,0	4,5	5,0	6,0
d1	thread size	3,5	4,0	4,5	5,0	6,0
	permissible tolerance			±0,3		
dk	head diameter	7,0	8,0	9,0	9,9	11,9
	permissible tolerance	±0,5		±0,6		
d2	core diameter	2,25	2,6	2,9	3,2	3,9
	permissible tolerance	+0,1/-0,3		±0,3		
ds	shank diameter	2,45	2,85	3,2	3,55	4,3
	permissible tolerance			±0,10		
k	head height max.	2,7	2,9	3,1	3,4	4,0
p	thread pitch	2,1	2,4	2,7	3,0	3,6
	permissible tolerance			±0,1 x p		
T-STAR plus size		T15 / T20		T20		T30
Cross recess size Z		2				3

Ls			Standard thread lengths (full thread = lgV / partial thread = lgT)											
Nom. dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
16	16,0	17,5	15,0											
20	18,5	20,5	18,0		18,0									
25	23,5	25,5	23,0	18,0	23,0		22,5		22,0					
30	28,5	30,5	27,0	18,0	27,5	18,0	27,0		27,0			27,0		
35	33,5	36,0	32,0	23,0	32,5	23,0	32,5	25,0	32,0	25,0	32,0	24,0		
40	38,5	41,0	37,0	23,0	37,5	23,0	37,0	25,0	37,0	27,0	37,0	24,0		
45	43,5	46,0	40,0	30,0	42,5	30,0	42,0	30,0	41,0	30,0	41,0	29,0		
50	48,5	51,0	40,0	32,0	47,5	32,5	47,0	32,5	46,0	32,0	46,0	32,0		
55	53,5	56,0		35,0	50,0	35,0	52,0	37,0	51,0	37,0	51,0	37,0		
60	58,5	61,0		35,0	50,0	35,0	57,0	37,0	56,0	37,0	56,0	37,0		
65	63,5	66,0		40,0	50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0		
70	68,5	71,0			50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0		
75	73,5	76,0			50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0		
80	78,5	81,0			50,0	37,5	59,0	47,0	61,0	46,0	61,0	46,0		
90	88,5	91,5					59,0	47,0		61,0		61,0		
100	98,5	101,5								61,0		61,0		
110	108,5	111,5								69,0*		68,0*		
120	118,5	121,5								69,0*		68,0*		
130	128,0	132,0										68,0*		
140	138,0	142,0										68,0*		
150	148,0	152,0										68,0*		
160	158,0	162,0										68,0*		

Screws of Ø6,0 mm with partial thread additionally in lengths of 180 to 300 mm, in steps of 20 mm, LgT= 68,0 mm*

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xdl to max. standard length permitted.

* Design C with lgT= max. 65,0 mm

Annex A22




SPAX®
Flat countersunk head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard
Stainless steel screws

Cross section A - B

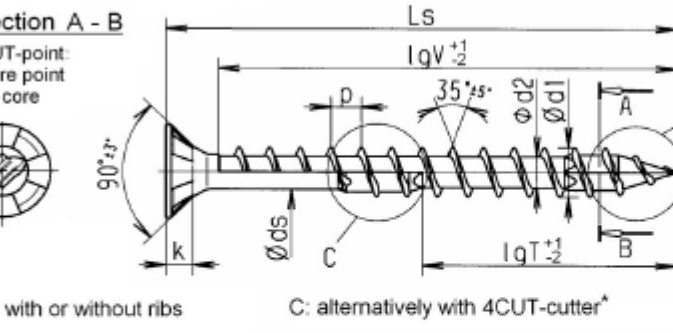

4CUT-point: Square point in core

Optional with or without ribs

C: alternatively with 4CUT-cutter*

D: 4CUT-point

Manufacturer's trade mark "SPAX"

Cross recess Type Z

T-STAR plus

Nominal diameter		3,5	4,0	4,5	5,0	6,0
d1	thread size	3,5	4,0	4,5	5,1	6,1
	permissible tolerance	±0,3				
dk	head diameter	7,0	8,0	8,8	9,7	11,6
	permissible tolerance	±0,5				
d2	core diameter	2,5	2,8	3,1	3,4	3,9
	permissible tolerance	±0,3				
ds	shank diameter	2,6	3,0	3,3	3,75	4,3
	permissible tolerance	±0,10				
k	head height max.	2,1	2,4	2,7	2,9	3,4
p	thread pitch	2,1	2,4	2,7	3,0	3,6
	permissible tolerance	±0,1 x p				
T-STAR plus size		T15 / T20		T20		T30
Cross recess size Type Z		2				3


Ls			Standard thread lengths (full thread = lgV / partial thread = lgT)											
Nom.dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
20	18,5	20,5	16,0		16,0									
25	23,5	25,5	21,0	18,0	21,0		20,0		20,0					
30	28,5	30,5	25,0	18,0	25,0	18,0	25,0		25,0		24,0			
35	33,5	36,0	30,0	23,0	30,0	23,0	30,0	25,0	30,0	25,0	29,0			
40	38,5	41,0	35,0	23,0	35,0	23,0	34,0	25,0	35,0	27,0	34,0	24,0		
45	43,5	46,0	40,0	30,0	40,0	30,0	39,0	30,0	39,0	30,0	38,0	29,0		
50	48,5	51,0	40,0	32,0	45,0	32,5	44,0	32,5	44,0	32,0	43,0	32,0		
55	53,5	56,0		35,0	50,0	35,0	49,0	37,0	49,0	37,0	48,0	37,0		
60	58,5	61,0		35,0	50,0	35,0	54,0	37,0	54,0	37,0	53,0	37,0		
65	63,5	66,0		40,0	50,0	37,5	59,0	42,0	59,0	41,0	58,0	41,0		
70	68,5	71,0			50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0		
75	73,5	76,0			50,0	37,5	59	42,0	61,0	41,0	61,0	41,0		
80	78,5	81,0			50,0	37,5	59,0	47,0	61,0	46,0	61,0	46,0		
90	88,5	91,5					59,0	47,0		61,0		61,0		
100	98,5	101,5								61,0		61,0		
110	108,5	111,5								69,0*		68,0*		
120	118,5	121,5								69,0*		68,0*		
130	128,0	132,0										68,0*		
140	138,0	142,0										68,0*		
150	148,0	152,0										68,0*		
160	158,0	162,0										68,0*		

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xdl to max. standard length permitted.

* Design C with lgT= max. 65,0 mm

Annex A21

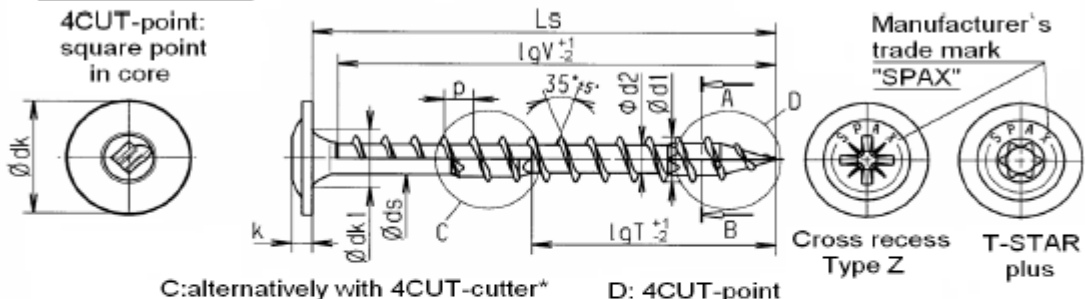		SPAX® Washer head		Self-tapping screw with full and partial thread Material: cold rolled wire according to SPAX - Factory Standard Stainless steel screws													
Cross section A-B 4CUT-point: square point in core																	
				C:alternatively with 4CUT-cutter*				D: 4CUT-point									
Nominal diameter								3,5		4,0		4,5		5,0		6,0	
d1	thread size							3,5		4,0		4,5		5,1		6,1	
	permissible tolerance											±0,3					
dk	head diameter							8,6		9,6		10,6		11,6		13,6	
	permissible tolerance											±0,6				±0,65	
dk1	countersink diameter							4,9		5,0		5,4		5,9		6,9	
	permissible tolerance											+0,20					
d2	core diameter							2,5		2,8		3,1		3,4		3,9	
	permissible tolerance											±0,3					
ds	shank diameter							2,6		3,0		3,3		3,75		4,3	
	permissible tolerance											±0,10					
k	head height max.							1,8		1,9		2,0		2,2		3,1	
p	thread pitch							2,1		2,4		2,7		3,0		3,6	
	permissible tolerance											±0,1 x p					
T-STAR plus size								T15 / T20				T20				T30	
Cross recess size Type Z												2					
Ls				Standard thread lengths (full thread = lgV / partial thread = lgT)													
Nom.dim.	min	max						lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
16	16,0	17,5						15,0									
20	18,5	20,5						18,0		18,0							
25	23,5	25,5						23,0	18,0	23,0		22,5		22,0			
30	28,5	30,5						27,0	18,0	27,5	18,0	27,5		27,0		27,0	
35	33,5	36,0						32,0	23,0	32,5	23,0	32,5	25,0	32,0	25,0	32,0	24,0
40	38,5	41,0						37,0	23,0	37,5	23,0	37,0	25,0	37,0	27,0	37,0	24,0
45	43,5	46,0						40,0	30,0	42,5	30,0	42,0	30,0	41,0	30,0	41,0	29,0
50	48,5	51,0						40,0	32,0	47,5	32,5	47,0	32,5	46,0	32,0	46,0	32,0
55	53,5	56,0							35,0	50,0	35,0	52,0	37,0	51,0	37,0	51,0	37,0
60	58,5	61,0							35,0	50,0	35,0	57,0	37,0	56,0	37,0	56,0	37,0
65	63,5	66,0							40,0	50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0
70	68,5	71,0								50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0
75	73,5	76,0								50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0
80	78,5	81,0										59,0	47,0	61,0	46,0	61,0	46,0
90	88,5	91,5											59,0	47,0		61,0	61,0
100	98,5	101,5													61,0		61,0
110	108,5	111,5														69,0*	68,0*
120	118,5	121,5														69,0*	68,0*
130	128,0	132,0															68,0*
140	138,0	142,0															68,0*
150	148,0	152,0															68,0*
160	158,0	162,0															68,0*
Intermediate lengths on Ls possible								Other thread lengths in the range ≥4xdl to max. standard length permitted.									
								* Design C with lgT= max. 65,0 mm									
Annex A24																	

SPAX®

Raised countersunk head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory Standard

Stainless steel screws

Cross section A - B

4CUT-point
Square point
in core

Manufacturer's
trade mark
"SPAX"

Cross recess
Type Z

T-STAR
plus

Optional with or without ribs

C: alternatively with 4CUT-cutter*

D: 4CUT-point

Nominal diameter			3,5	4,0	4,5	5,0	6,0							
d1	thread size		3,5	4,0	4,5	5,1	6,1							
	permissible tolerance				±0,3									
dk	head diameter		7,0	8,0	8,8	9,7	11,6							
	permissible tolerance		±0,5		±0,6									
d2	core diameter		2,5	2,8	3,1	3,4	3,9							
	permissible tolerance				±0,3									
ds	shank diameter		2,6	3,0	3,3	3,75	4,3							
	permissible tolerance				±0,10									
k	head height max.		2,1	2,4	2,7	2,9	3,4							
p	thread pitch		2,1	2,4	2,7	3,0	3,6							
	permissible tolerance				±0,1 x p									
T-STAR plus size			T15 / T20		T20		T30							
Cross recess size Type Z			2				3							
Ls			Standard thread lengths (full thread = lgV / partial thread = lgT)											
Nom.dim.	min	max			lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
20	18,5	20,5			16,0		16,0							
25	23,5	25,5			21,0	18,0	21,0		20,0		20,0			
30	28,5	30,5			25,0	18,0	25,0	18,0	25,0		25,0		24,0	
35	33,5	36,0			30,0	23,0	30,0	23,0	30,0	25,0	30,0	25,0	29,0	
40	38,5	41,0			35,0	23,0	35,0	23,0	34,0	25,0	35,0	27,0	34,0	24,0
45	43,5	46,0				30,0	40,0	30,0	39,0	30,0	39,0	30,0	38,0	29,0
50	48,5	51,0				32,0	45,0	32,5	44,0	32,5	44,0	32,0	43,0	32,0
55	53,5	56,0				35,0	50,0	35,0	49,0	37,0	49,0	37,0	48,0	37,0
60	58,5	61,0				35,0	50,0	35,0	54,0	37,0	54,0	37,0	53,0	37,0
65	63,5	66,0				40,0	50,0	37,5	59,0	42,0	59,0	41,0	58,0	41,0
70	68,5	71,0					50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0
75	73,5	76,0					50,0	37,5	59,0	42,0	61,0	41,0	61,0	41,0
80	78,5	81,0					50,0	37,5	59,0	47,0	61,0	46,0	61,0	46,0
90	88,5	91,5							59,0	47,0		61,0		61,0
100	98,5	101,5										61,0		61,0
110	108,5	111,5												
120	118,5	121,5										69,0*		68,0*
130	128,0	132,0												68,0*
140	138,0	142,0												68,0*
150	148,0	152,0												68,0*
160	158,0	162,0												68,0*

Intermediate lengths on Ls possible

Other thread lengths in the range $\geq 4 \times d_1$
to max. standard length permitted.

* Design C with lgT= max. 65,0 mm

Annex A2



SPAX®

Pan head

Self-tapping screw with full and partial thread


Material: cold rolled wire according to SPAX - Factory Standard

Stainless steel screws

Cross section A - B

4CUT-point:
Square point
in core



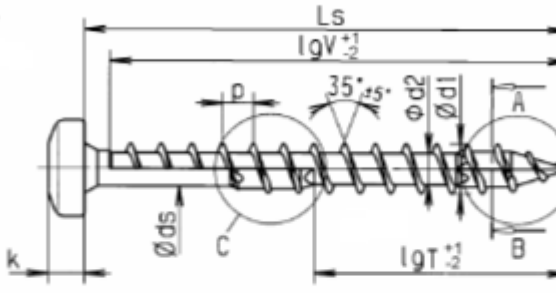

Manufacturer's
trade mark
"SPAX"



Cross recess
Type Z



T-STAR
plus

C: alternatively with 4CUT-cutter*

D: 4CUT-point

Nominal diameter				3,5	4,0	4,5	5,0	6,0
d1	thread size			3,5	4,0	4,5	5,1	6,1
	permissible tolerance					±0,3		
dk	head diameter			7,0	7,9	9,0	9,9	11,9
	permissible tolerance			±0,5		±0,6		
d2	core diameter			2,5	2,8	3,1	3,4	3,9
	permissible tolerance					±0,3		
ds	shank diameter			2,6	3,0	3,3	3,75	4,3
	permissible tolerance					±0,10		
k	head height max.			2,7	2,9	3,1	3,4	4,0
p	thread pitch			2,1	2,4	2,7	3,0	3,6
	permissible tolerance					±0,1 x p		
T-STAR plus size				T15 / T20	T20		T30	
Cross recess size Z					2		3	
Ls		Standard thread lengths (full thread = lgV / partial thread = lgT)						
Nom. dim.	min	max			lgV	lgT	lgV	lgT
16	16,0	17,5			15,0			
20	18,5	20,5			18,0		18,0	
25	23,5	25,5			23,0	18,0	23,0	22,5
30	28,5	30,5			27,0	18,0	27,5	27,0
35	33,5	36,0			32,0	23,0	32,5	23,0
40	38,5	41,0			37,0	23,0	37,5	23,0
45	43,5	46,0			40,0	30,0	42,5	30,0
50	48,5	51,0			40,0	32,0	47,5	32,5
55	53,5	56,0				35,0	50,0	35,0
60	58,5	61,0				35,0	50,0	35,0
65	63,5	66,0				40,0	50,0	37,5
70	68,5	71,0					50,0	37,5
75	73,5	76,0					50,0	37,5
80	78,5	81,0					50,0	37,5
90	88,5	91,5						59,0
100	98,5	101,5						59,0
110	108,5	111,5						61,0
120	118,5	121,5						61,0
130	128,0	132,0						69,0*
140	138,0	142,0						69,0*
150	148,0	152,0						68,0*
160	158,0	162,0						68,0*

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xd1 to max. standard length permitted.

* Design C with lgT= max. 65,0 mm

Annex A2a




SPAX®-S

Flat countersunk head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory standard

Screws of high carbon steel

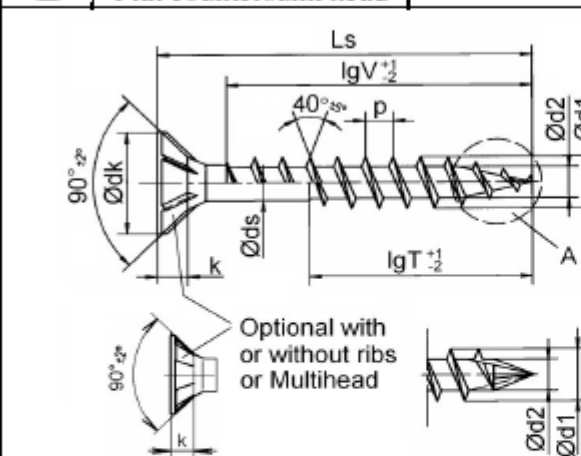


Manufacturer's trade mark $\triangle$ or "SPAX"




T-STAR

T-STAR plus

A: alternatively with CUT-point



Nominal diameter		8,0	10,0	12,0											
d1	thread size	8,1	10,0	12,0											
	permissible tolerance	±0,4	±0,5	±0,6											
dk	head diameter	15,1	18,6	22,6											
	permissible tolerance	±0,75	±0,9	±1,1											
d2	core diameter	5,0	6,1	7,35											
	permissible tolerance	±0,3		±0,35											
ds	shank diameter	5,7	6,8	8,5											
	permissible tolerance		±0,25												
k	head height max.	4,4	6,0	6,6											
p	thread pitch	4,0	5,0	6,0											
	permissible tolerance		±0,1 x p												
T - STAR size		T40	T50	T50											
Ls		Standard thread lengths (full thread=lgV / partial thread = lgT)													
Nom.dim.		min	max	lgV	lgT	lgV	lgT	lgV	lgT						
40		38,5	41,5	32,0											
45		43,5	46,5	37,0											
50		48,5	51,5	42,0	32,0	40,0									
55		53,5	56,5	47,0	32,0	45,0									
60		58,5	61,5	52,0	37,0	50,0		50,0							
65		63,5	66,5	57,0	37,0	55,0	40,0	55,0							
70		68,5	71,5	61,0	42,0	60,0	40,0	60,0							
75		73,5	76,5	61,0	42,0	60,0	45,0	60,0							
80		78,5	81,5	70,0	47,0	70,0	50,0	70,0	50,0						
90		88,5	91,5	80,0	52,0	80,0	55,0	80,0	55,0						
100		98,5	101,5	80,0	57,0	80,0	60,0	80,0	60,0						
110		108,5	111,5	80,0	70,0	80,0	70,0	80,0							
120		118,5	121,5	80,0	70,0	80,0	70,0	80,0							
130		128,0	132,0	80,0	70,0	80,0	70,0	80,0							
140		138,0	142,0		80,0		80,0	80,0							
150		148,0	152,0		80,0		80,0	100,0							
160		158,0	162,0		80,0		80,0	100,0							
180		178,0	182,0		80,0		80,0	100,0							
200		198,0	202,0		80,0		80,0	100,0							
to															
600		597,0	602,0		80,0		80,0	100,0							

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xd1 to max. standard length permitted

Annex A27

SPAX®-S
Washer head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory standard

Screws of high carbon steel

Manufacturer's trade mark Δ or "SPAX"

A: alternatively with CUT-point

Nominal diameter		8,0			10,0		12,0			
d1	thread size	8,1			10,0		12,0			
	permissible tolerance	$\pm 0,4$			$\pm 0,5$		$\pm 0,6$			
dk	head diameter	18,0	20,0	22,0	25,0	29,0				
	permissible tolerance	$\pm 0,9$	$\pm 1,0$	$\pm 1,1$	$\pm 1,25$	$\pm 1,45$				
dk1	countersink diameter	9,0			12,0		14,0			
	permissible tolerance	$+0,30$								
d2	core diameter	5,0			6,1		7,35			
	permissible tolerance	$\pm 0,3$					$\pm 0,35$			
ds	shank diameter	5,7			6,8		8,5			
	permissible tolerance	$\pm 0,25$								
k	head height max.	4,0			4,7		5,6			
p	thread pitch	4,0			5,0		6,0			
	permissible tolerance	$\pm 0,1 \times p$								
T - STAR size		T40			T50					
Ls		Standard thread lengths (full thread = lgV / partial thread = lgT)								
Nom.dim.		min	max	lgV	lgT	lgV	lgT	lgV	lgT	
40	38,5	41,5	37,0							
45	43,5	46,5	42,0							
50	48,5	51,5	46,0	32,0						
55	53,5	56,5	51,0	32,0	50,0		50,0			
60	58,5	61,5	56,0	37,0	55,0		55,0			
65	63,5	66,5	61,0	37,0	60,0	40,0	60,0			
70	68,5	71,5	61,0	42,0	60,0	40,0	60,0			
75	73,5	76,5	70,0	42,0	70,0	45,0	70,0			
80	78,5	81,5	70,0	47,0	70,0	50,0	70,0	50,0		
90	88,5	91,5	80,0	52,0	80,0	55,0	80,0	55,0		
100	98,5	101,5	80,0	57,0	80,0	60,0	80,0	60,0		
110	108,5	111,5	80,0	70,0	80,0	70,0		80,0		
120	118,5	121,5	80,0	70,0	80,0	70,0		80,0		
130	128,0	132,0	80,0	70,0	80,0	70,0		80,0		
140	138,0	142,0		80,0		80,0		80,0		
150	148,0	152,0		80,0		80,0		100,0		
160	158,0	162,0		80,0		80,0		100,0		
180	178,0	182,0		80,0		80,0		100,0		
200	198,0	202,0		80,0		80,0		100,0		
to										
600	597,0	602,0		80,0		80,0		100,0		

Intermediate lengths on Ls possible

Other thread lengths in the range $\geq 4 \times d1$
to max. standard length permitted

Annex A2




SPAX®-S
Raised countersunk head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory standard

Screws of high carbon steel

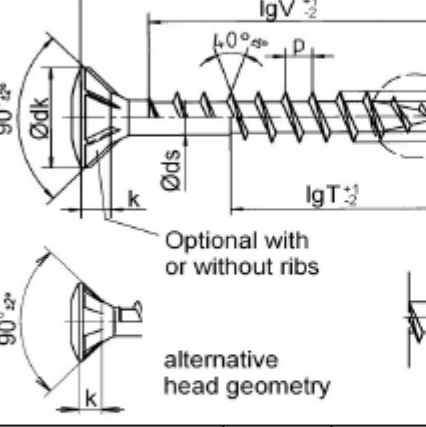

Optional with or without ribs

alternative head geometry

Manufacturer's trade mark Δ or "SPAX"



T-STAR T-STAR plus

A: alternatively with CUT-point

Nominal diameter			8,0	10,0	12,0						
d1	thread size		8,1	10,0	12,0						
	permissible tolerance		±0,4	±0,5	±0,6						
dk	head diameter		15,1	18,6	22,6						
	permissible tolerance		±0,75	±0,9	±1,1						
d2	core diameter		5,0	6,1	7,35						
	permissible tolerance		±0,3		±0,35						
ds	shank diameter		5,7	6,8	8,5						
	permissible tolerance		±0,25								
k	head height max.		4,4	6,0	6,6						
p	thread pitch		4,0	5,0	6,0						
	permissible tolerance		±0,1 x p								
T - STAR size			T40		T50		T50				
Ls			Standard thread lengths (full thread=lgV / partial thread = lgT)								
Nom.dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT			
40	38,5	41,5	32,0								
45	43,5	46,5	37,0								
50	48,5	51,5	42,0	32,0	40,0						
55	53,5	56,5	47,0	32,0	45,0						
60	58,5	61,5	52,0	37,0	50,0			50,0			
65	63,5	66,5	57,0	37,0	55,0	40,0	55,0				
70	68,5	71,5	61,0	42,0	60,0	40,0	60,0				
75	73,5	76,5	61,0	42,0	60,0	45,0	60,0				
80	78,5	81,5	70,0	47,0	70,0	50,0	70,0	50,0			
90	88,5	91,5	80,0	52,0	80,0	55,0	80,0	55,0			
100	98,5	101,5	80,0	57,0	80,0	60,0	80,0	60,0			
110	108,5	111,5	80,0	70,0	80,0	70,0		80,0			
120	118,5	121,5	80,0	70,0	80,0	70,0		80,0			
130	128,0	132,0	80,0	70,0	80,0	70,0		80,0			
140	138,0	142,0		80,0		80,0		80,0			
150	148,0	152,0		80,0		80,0		100,0			
160	158,0	162,0		80,0		80,0		100,0			
180	178,0	182,0		80,0		80,0		100,0			
200	198,0	202,0		80,0		80,0		100,0			
to											
600	597,0	602,0		80,0		80,0		100,0			

Intermediate lengths on Ls possible

Other thread lengths in the range $\geq 4 \times d1$ to max. standard length permitted

Annex A20

SPAX®-S
Pan head

Self-tapping screw with full and partial thread
Material: cold rolled wire according to SPAX - Factory standard
Screws of high carbon steel

Manufacturer's trade mark Δ or "SPAX"

T-STAR T-STAR plus

A: alternatively with CUT-point

Nominal diameter	8,0	10,0	12,0						
d1 thread size	8,1	10,0	12,0						
permissible tolerance	+0,4	+0,5	+0,6						
dk head diameter	15,5	19,0	23,0						
permissible tolerance	+0,75	+0,95	+1,15						
d2 core diameter	5,0	6,1	7,35						
permissible tolerance	+0,3	+0,35							
ds shank diameter	5,7	6,8	8,5						
permissible tolerance	+0,25								
k head height max.	5,7	7,1	8,5						
R raised radius	16,0	20,0	24,0						
p thread pitch	4,0	5,0	6,0						
permissible tolerance	+0,1 x p								
T-STAR size				T40	T50		T50		
Ls				Standard thread lengths (full thread=lgV / partial thread = lgT)					
Nom.dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	
40	38,0	41,5	37,0						
45	43,0	46,5	42,0						
50	48,5	51,5	46,0	32,0					
55	53,5	56,5	51,0	32,0	50,0		50,0		
60	58,5	61,5	56,0	37,0	55,0		55,0		
65	63,5	66,5	61,0	37,0	60,0	40,0	60,0		
70	68,5	71,5	61,0	42,0	60,0	40,0	60,0		
75	73,5	76,5	70,0	42,0	70,0	45,0	70,0		
80	78,5	81,5	70,0	47,0	70,0	50,0	70,0	50,0	
90	88,5	91,5	80,0	52,0	80,0	55,0	80,0	55,0	
100	98,5	101,5	80,0	57,0	80,0	60,0	80,0	60,0	
110	108,5	111,5	80,0	70,0	80,0	70,0		80,0	
120	118,5	121,5	80,0	70,0	80,0	70,0		80,0	
130	128,0	132,0	80,0	70,0	80,0	70,0		80,0	
140	138,0	142,0		80,0		80,0		80,0	
150	148,0	152,0		80,0		80,0		100,0	
160	158,0	162,0		80,0		80,0		100,0	
180	178,0	182,0		80,0		80,0		100,0	
200	198,0	202,0		80,0		80,0		100,0	
to									
600	597,0	602,0		80,0		80,0		100,0	

Intermediate lengths on Ls possible

Other thread lengths in the range $\geq 4 \times d_1$ to max. standard length permitted

Annex A30

SPAX®-S
Hex. head with/without flange

Self-tapping screw with full and partial thread
Material: cold rolled wire according to SPAX - Factory standard
Screws of high carbon steel

Hex. head
with flange

Hex. head
without flange

A: alternatively with
CUT-point

			with flange			without flange								
Nominal diameter			8,0	10,0	12,0	8,0	10,0	12,0						
d1	thread size		8,1	10,0	12,0	8,1	10,0	12,0						
	permissible tolerance		±0,4	±0,5	±0,6	±0,4	±0,5	±0,6						
SW			10	13	16	10	13	16						
Dc	flange diameter		17,0	20,8	24,7									
	permissible tolerance		±0,85	±1,0	±1,2									
d2	core diameter		5,0	6,1	7,3	5,0	6,1	7,35						
	permissible tolerance				±0,3			±0,35						
ds	shank diameter		5,7	6,8	8,5	5,7	6,8	8,5						
	permissible tolerance			±0,25			±0,25							
k			8,5	9,7	12,1	6,0	7,0	8,0						
p			4,0	5,0	6,0	4,0	5,0	6,0						
permissible tolerance				±0,1 x p			±0,1 x p							
Ls			Standard thread lengths (full thread=lgV / partial thread = lgT)											
Nom.dim.	min	max	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT	lgV	lgT
40	38,5	41,5	37,0						37,0					
45	43,5	46,5	42,0						42,0					
50	48,5	51,5	46,0	32,0	45,0				46,0	32,0	45,0			
55	53,5	56,5	51,0	32,0	50,0		50,0		51,0	32,0	50,0		50,0	
60	58,5	61,5	56,0	37,0	55,0		55,0		56,0	37,0	55,0		55,0	
65	63,5	66,5	61,0	37,0	60,0	40,0	60,0		61,0	37,0	60,0	40,0	60,0	
70	68,5	71,5	61,0	42,0	60,0	40,0	60,0		61,0	42,0	60,0	40,0	60,0	
75	73,5	76,5	70,0	42,0	70,0	45,0	70,0		70,0	42,0	70,0	45,0	70,0	
80	78,5	81,5	70,0	47,0	70,0	50,0	70,0	50,0	70,0	47,0	70,0	50,0	70,0	50,0
90	88,5	91,5	80,0	52,0	80,0	55,0	80,0	55,0	80,0	52,0	80,0	55,0	80,0	55,0
100	98,5	101,5	80,0	57,0	80,0	60,0	80,0	60,0	80,0	57,0	80,0	60,0	80,0	60,0
110	108,5	111,5	80,0	70,0	80,0	70,0		80,0	80,0	70,0	80,0	70,0		80,0
120	118,5	121,5	80,0	70,0	80,0	70,0		80,0	80,0	70,0	80,0	70,0		80,0
130	128,0	132,0	80,0	70,0	80,0	70,0		80,0	80,0	70,0	80,0	70,0		80,0
140	138,0	142,0		80,0		80,0		80,0		80,0		80,0		80,0
150	148,0	152,0		80,0		80,0		100,0		80,0		80,0		100,0
160	158,0	162,0		80,0		80,0		100,0		80,0		80,0		100,0
180	178,0	182,0		80,0		80,0		100,0		80,0		80,0		100,0
200	198,0	202,0		80,0		80,0		100,0		80,0		80,0		100,0
to														
600	597,0	602,0		80,0		80,0		100,0		80,0		80,0		100,0

Intermediate lengths on Ls possible

Other thread lengths in the range $\geq 4 \times d1$
to max. standard length permitted

Annex A3

SPAX®
Flat countersunk head

Self-tapping screw with full and partial thread
Material: cold rolled wire according to SPAX - Factory standard
Screws of high carbon steel

Cross section A - B

4CUT-point:
Square point
in core

Optional with or without ribs

C: alternatively with 4CUT-cutter

D: 4CUT-point

Manufacturer's trade mark "SPAX"

T-STAR plus

Nominal diameter			8,0	10,0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
------------------	--	--	-----	------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

SPAX®
Washer head

Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory standard

Screws of high carbon steel

Cross section A - B

4CUT-point:
Square point
in core

C: alternatively with 4CUT-cutter

D: 4CUT-point

Manufacturer's trade mark

" SPAX "

T-STAR
plus

Nominal diameter			8,0		10,0				
d1	thread size		8,1		10,0				
	permissible tolerance		±0,4		±0,5				
dk	head diameter		18,0	20,0	22,0	24,0	23,0	25,0	27,0
	permissible tolerance		±0,9	±1,0	±1,1	±1,2	±1,15	±1,25	±1,35
dk1	countersink diameter		9,00		12,00				
	permissible tolerance		+0,50		+0,5				
d2	core diameter		5,0		6,1				
	permissible tolerance		±0,3						
ds	shank diameter		5,7		6,8				
	permissible tolerance		±0,25		±0,25				
k	head height max.		4,3		4,7				
p	thread pitch		4,8		6,0				
	permissible tolerance		±0,1 x p		±0,1 x p				
T-STAR plus size			T40		T50				
Ls			Standard thread lengths (full thread=lgV / partial thread = lgT)						
Nom.dim.	min	max	lgV	lgT	lgV	lgT			
40	38,5	41,5	37,0						
45	43,5	46,5	42,0						
50	48,5	51,5	46,0	32,0	45,0				
55	53,5	56,5	51,0	32,0	50,0				
60	58,5	61,5	56,0	37,0	55,0				
65	63,5	66,5	61,0	37,0	60,0				
70	68,5	71,5	61,0	42,0	60,0				
75	73,5	76,5	70,0	42,0	70,0				
80	78,5	81,5	70,0	47,0	70,0	50,0			
90	88,5	91,5	80,0	52,0	80,0	55,0			
100	98,5	101,5	80,0	57,0	80,0	60,0			
110	108,5	111,5	80,0	70,0	80,0	80,0			
120	118,5	121,5	80,0	70,0	80,0	80,0			
130	128,0	132,0	80,0	70,0	80,0	80,0			
140	138,0	142,0		80,0		80,0			
150	148,0	152,0		80,0		80,0			
160	158,0	162,0		80,0		80,0			
180	178,0	182,0		80,0		80,0			
200	198,0	202,0		80,0		80,0			
to									
600*	597,0	602,0		80,0		80,0			

Intermediate lengths on Ls possible

 = Preferred size

*for d1=10,0 Ls up to

1.000 mm possible

Other thread lengths in the range ≥4xd1

to max. standard length permitted

Annex A33

SPAX®

Raised countersunk head

Self-tapping screw with full and partial thread
Material: cold rolled wire according to SPAX - Factory standard
Screws of high carbon steel

Cross section A - B

Nominal diameter		8,0	10,0						
d1	thread size	8,1	10,0						
	permissible tolerance	±0,4	±0,5						
dk	head diameter	15,1	18,6						
	permissible tolerance	±0,75	±0,9						
d2	core diameter	5,0	6,1						
	permissible tolerance	±0,3							
ds	shank diameter	5,7	6,8						
	permissible tolerance	±0,25	±0,25						
k	head height max.	4,4	6,0						
p	thread pitch	4,8	6,0						
	permissible tolerance	±0,1 x p	±0,1 x p						

T-STAR plus size			T40	T50															
Ls			Standard thread lengths (full thread=lgV / partial thread = lgT)																
Nom.dim.	min	max	lgV	lgT	lgV	lgT													
40	38,5	41,5	32,0																
45	43,5	46,5	37,0																
50	48,5	51,5	42,0	32,0	40,0														
55	53,5	56,5	47,0	32,0	45,0														
60	58,5	61,5	52,0	37,0	50,0														
65	63,5	66,5	57,0	37,0	55,0														
70	68,5	71,5	61,0	42,0	60,0														
75	73,5	76,5	61,0	42,0	60,0														
80	78,5	81,5	70,0	47,0	70,0	50,0													
90	88,5	91,5	80,0	52,0	80,0	55,0													
100	98,5	101,5	80,0	57,0	80,0	60,0													
110	108,5	111,5	80,0	70,0	80,0	80,0													
120	118,5	121,5	80,0	70,0	80,0	80,0													
130	128,0	132,0	80,0	70,0	80,0	80,0													
140	138,0	142,0		80,0		80,0													
150	148,0	152,0		80,0		80,0													
160	158,0	162,0		80,0		80,0													
180	178,0	182,0		80,0		80,0													
200	198,0	202,0		80,0		80,0													
to																			
600	597,0	602,0		80,0		80,0													

Intermediate lengths on Ls possible

Other thread lengths in the range $\geq 4 \times d1$ to max. standard length permitted

SPAX
Pan head

Self-tapping screw with full and partial thread
Material: cold rolled wire according to SPAX - Factory standard
Screws of high carbon steel

Cross section A-B

C: alternatively with 4CUT-cutter

D: 4CUT-point

Nominal diameter		8,0	10,0																
d1	thread size	8,1	10,0																
	permissible tolerance	±0,4	±0,5																
dk	head diameter	15,5	19,0																
	permissible tolerance	±0,75	±0,95																
d2	core diameter	5,0	6,1																
	permissible tolerance	±0,30																	
ds	shank diameter	5,7	6,8																
	permissible tolerance	±0,25	±0,25																
k	head height max.	6,0	7,1																
p	thread pitch	4,8	6,0																
	permissible tolerance	±0,1 x p	±0,1 x p																
T-STAR plus size		T40	T50																
Ls		Standard thread lengths (full thread=lgV / partial thread = lgT)																	
Nom.dim.		min	max	lgV	lgT	lgV	lgT												
40,0		38,5	41,5	37,0															
45,0		43,5	56,5	42,0															
50		48,5	51,5	46,0	32,0	40,0													
55		53,5	56,5	51,0	32,0	45,0													
60		58,5	61,5	56,0	37,0	50,0													
65		63,5	66,5	61,0	37,0	55,0													
70		68,5	71,5	61,0	42,0	60,0													
75		73,5	76,5	70,0	42,0	60,0													
80		78,5	81,5	70,0	47,0	70,0	50,0												
90		88,5	91,5	80,0	52,0	80,0	55,0												
100		98,5	101,5	80,0	57,0	80,0	60,0												
110		108,5	111,5	80,0	70,0	80,0	80,0												
120		118,5	121,5	80,0	70,0	80,0	80,0												
130		128,0	132,0	80,0	70,0	80,0	80,0												
140		138,0	142,0		80,0		80,0												
150		148,0	152,0		80,0		80,0												
160		158,0	162,0		80,0		80,0												
180		178,0	182,0		80,0		80,0												
200		198,0	202,0		80,0		80,0												
to																			
600		597,0	602,0		80,0		80,0												

Intermediate lengths on Ls possible

Other thread lengths in the range $\geq 4 \times d1$
to max. standard length permitted

Annex A35

</



SPAX®

Washer head


Self-tapping screw with full and partial thread


Material: cold rolled wire according to SPAX - Factory standard

Stainless steel screws

Cross section A - B

4CUT-point:
Square point
in core



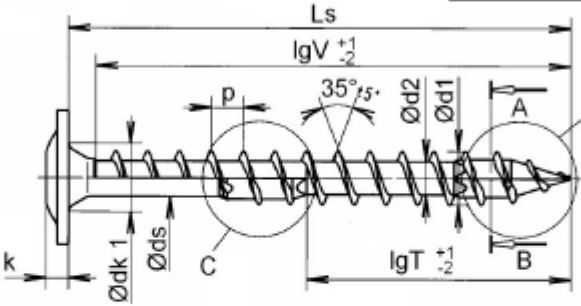

C: alternatively with 4CUT-cutter

D: 4CUT-point

Manufacturer's trade mark

" SPAX "



T-STAR plus


Nominal diameter			8,0				10,0		
d1	thread size		8,1				10,0		
	permissible tolerance		±0,4				±0,5		
dk	head diameter		18,0	20,0	22,0	24,0	23,0	25,0	27,0
	permissible tolerance		±0,9	±1,0	±1,1	±1,2	±1,15	±1,25	±1,35
dk1	countersink diameter		9,00				12,00		
	permissible tolerance		+0,50				+0,5		
d2	core diameter		5,3				6,1		
	permissible tolerance		±0,3				±0,3		
ds	shank diameter		5,70				6,80		
	permissible tolerance		±0,25				±0,25		
k	head height max.		4,3				4,7		
p	thread pitch		4,8				6,0		
	permissible tolerance		±0,1 x p				±0,1 x p		
T-STAR plus size			T40				T50		
Ls			Standard thread lengths (full thread=lgV / partial thread = lgT)						
Nom.dim.	min	max	lgV		lgT		lgV		lgT
40	37,5	41,5	37,0						
45	43,5	46,5	42,0						
50	48,5	51,5	46,0		32,0		40,0		
55	53,5	56,5	51,0		32,0		45,0		
60	58,5	61,5	56,0		37,0		50,0		
65	63,5	66,5	61,0		37,0		55,0		
70	68,5	71,5	61,0		42,0		60,0		
75	73,5	76,5	70,0		42,0		70,0		
80	78,5	81,5	70,0		47,0		70,0		50,0
90	88,5	91,5	80,0		52,0		80,0		55,0
100	98,5	101,5	80,0		57,0		80,0		60,0
110	108,5	111,5	80,0		70,0		80,0		80,0
120	118,5	121,5	80,0		70,0		80,0		80,0
130	128,0	132,0	80,0		70,0		80,0		80,0
140	138,0	142,0			80,0				80,0
150	148,0	152,0			80,0				80,0
160	158,0	162,0			80,0				80,0
180	178,0	182,0			80,0				80,0
200	197,0	202,0			80,0				80,0
to									
600	597,0	602,0			80,0				80,0

Intermediate lengths on Ls possible

= Preferred size

Other thread lengths in the range ≥4xd1 to max. standard length permitted

Annex A38



SPAX®

Raised countersunk head


Self-tapping screw with full and partial thread

Material: cold rolled wire according to SPAX - Factory standard

Stainless steel screws

Cross section A - B

4CUT-point:
Square point
in core



Optional with or
without ribs

Manufacturer's
trade mark
"SPAX"



T-STAR plus

C: alternatively with 4CUT-cutter

D: 4CUT-point

Nominal diameter		8,0	10,0						
d1	thread size	8,1	10,0						
	permissible tolerance	±0,4	±0,5						
dk	head diameter	15,1	18,6						
	permissible tolerance	±0,75	±0,93						
d2	core diameter	5,3	6,1						
	permissible tolerance	±0,3	±0,3						
ds	shank diameter	5,70	6,80						
	permissible tolerance	±0,25	±0,25						
k	head height max.	4,4	6,0						
p	thread pitch	4,8	6,0						
	permissible tolerance	±0,1 x p	±0,1 x p						
T-STAR plus size		T40	T50						

Ls			Standard thread lengths (full thread=lgV / partial thread = lgT)							
Nom.dim.	min	max	lgV	lgT	lgV	lgT				
40	38,5	41,5	32,0							
45	43,5	46,5	37,0							
50	48,5	51,5	42,0	32,0	40,0					
55	53,5	56,5	47,0	32,0	45,0					
60	58,5	61,5	52,0	37,0	50,0					
65	63,5	66,5	57,0	37,0	55,0					
70	68,5	71,5	61,0	42,0	60,0					
75	73,5	76,5	61,0	42,0	60,0					
80	78,5	81,5	70,0	47,0	70,0	50,0				
90	88,5	91,5	80,0	52,0	80,0	55,0				
100	98,5	101,5	80,0	57,0	80,0	60,0				
110	108,5	111,5	80,0	70,0	80,0	80,0				
120	118,5	121,5	80,0	70,0	80,0	80,0				
130	128,0	132,0	80,0	70,0	80,0	80,0				
140	138,0	142,0		80,0		80,0				
150	148,0	152,0		80,0		80,0				
160	158,0	162,0		80,0		80,0				
180	178,0	182,0		80,0		80,0				
200	198,0	202,0		80,0		80,0				
to										
600	597,0	602,0		80,0		80,0				

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xd1
to max. standard length permitted

Annex A39

SPAX[®]

Pan head

Self-tapping screw with full and partial thread
Material: cold rolled wire according to SPAX - Factory standard
Stainless steel screws

Cross section A-B

Manufacturer's trade mark "SPAX"

T-STAR plus

C: alternatively with 4CUT-cutter D: 4CUT-point

Nominal diameter	8,0	10,0							
d1	thread size	8,1	10,0						
	permissible tolerance	±0,4	±0,5						
dk	head diameter	15,5	19,0						
	permissible tolerance	+0,77	+0,95						
d2	core diameter	5,3	6,1						
	permissible tolerance	±0,3	±0,3						
ds	shank diameter	5,70	6,80						
	permissible tolerance	±0,25	±0,25						
k	head height max.	6,0	7,1						
p	thread pitch	4,8	6,0						
	permissible tolerance	±0,1 x p	±0,1 x p						
T-STAR plus size		T40	T50						
Ls		Standard thread lengths (full thread=lgV / partial thread = lgT)							
Nom.dim.	min	max	lgV	lgT	lgV	lgT			
40	38,5	41,5	37,0						
45	43,5	46,5	42,0						
50	48,5	51,5	46,0	32,0	40,0				
55	53,5	56,5	51,0	32,0	45,0				
60	58,5	61,5	56,0	37,0	50,0				
65	63,5	66,5	61,0	37,0	55,0				
70	68,5	71,5	61,0	42,0	60,0				
75	73,5	76,5	70,0	42,0	60,0				
80	78,5	81,5	70,0	47,0	70,0	50,0			
90	88,5	91,5	80,0	52,0	80,0	55,0			
100	98,5	101,5	80,0	57,0	80,0	60,0			
110	108,5	111,5	80,0	70,0	80,0	80,0			
120	118,5	121,5	80,0	70,0	80,0	80,0			
130	128,0	132,0	80,0	70,0	80,0	80,0			
140	138,0	142,0		80,0		80,0			
150	148,0	152,0		80,0		80,0			
160	158,0	162,0		80,0		80,0			
180	178,0	182,0		80,0		80,0			
200	198,0	202,0		80,0		80,0			
to									
600	597,0	202,0		80,0		80,0			

Intermediate lengths on Ls possible

Other thread lengths in the range ≥4xd1 to max. standard length permitted

SPAX®-S

Self-tapping screw with full- thread
Material: Cold rolled wire according to SPAX - Factory Standard
Screws of high-carbon steel

Nominal diameter		6,0											
Type of Head		Countersunk head		Washer head		Cylindric head	Pan head						
d1	thread size	6,0											
	permissible tolerance	±0,3											
dk	head diameter	9,7	11,6	13,0	15,0	8,4	9,9	11,9					
	permissible tolerance	±0,6		±0,65	±0,75	±0,6							
d2	core diameter	3,8											
	permissible tolerance	±0,3											
k	head height max.	2,9	3,8	2,2	2,4	6,0	3,4	4					
p	thread pitch	3,0											
	permissible tolerance	±0,1 x p											
T-STAR	size	T20		T30			T20	T30					
Thread-free length X		Ls 60-200		max. 15 mm									
permissible tolerance of screw length	Ls 60-99	Ls ±2 mm											
	Ls 100-200	Ls ±5 mm											

 =Preferred Version

Annex A4

SPAX®

Self-tapping screw with full- thread

Material: Cold rolled wire according to SPAX - Factory Standard

Screws of high-carbon steel

C: 4CUT-point

Manufacturer's
trade mark
"SPAX"

T-STAR
plus

C: 4CUT-point

Manufacturer's
trade mark
"SPAX"

T-STAR
plus

C: 4CUT-point

T-STAR
plus

C: 4CUT-point

Manufacturer's
trade mark
"SPAX"

T-STAR
plus

Cross section A-B

4CUT-point:
Square point
in core

Nominal diameter		6,0											
Type of Head		Countersunk head		Washer head		Cylindric head		Pan head					
d1	thread size	6,0											
	permissible tolerance	±0,3											
dk	head diameter	9,7	11,6	13,0	15,0	8,4	9,9	11,9					
	permissible tolerance	±0,6		±0,65	±0,75	±0,6							
d2	core diameter	3,9											
	permissible tolerance	±0,3											
k	head height max.	2,9	3,8	2,2	2,4	6,0	3,4	4					
p	thread pitch	3,6											
	permissible tolerance	±0,1 x p											
T-STAR plus size		T20	T30				T20	T30					
Thread-free length X		Ls 60-200		max. 15 mm									
permissible tolerance of screw length	Ls 60-99	Ls ±2 mm											
	Ls 100-200	Ls ±5 mm											

 =Preferred Version

Annex A4

SPAX®-S

Self-tapping screw with full- thread
Material: Cold rolled wire according to SPAX - Factory Standard
Screws of high-carbon steel

A: alternatively with CUT-point

Nominal diameter		8,0												
Type of Head		Countersunk head		Washer head		Cylindric head	Pan head							
d1	thread size	8,1												
	permissible tolerance	±0,4												
dk	head diameter	11,6	15,1	18,0	20,0	22,0	24,0	10,0	15,5	11,9				
	permissible tolerance	±0,6	±0,75	±0,9	±1,0	±1,1	±1,2	±0,6	±0,75	±0,6				
d2	core diameter	5,0												
	permissible tolerance	±0,3												
k	head height max.	3,0	4,8	4,5		8,0	5,8	4,0						
p	thread pitch	4,0												
	permissible tolerance	±0,1 x p												
T - STAR size		T40							T30					
Thread-free length X	Ls 60-200	max. 15 mm												
	Ls > 200	max. 25mm												
permissible tolerance of screw length	Ls 60-99	Ls ±2 mm												
	Ls 100-200	Ls ±5 mm												
	Ls > 200	Ls ±15 mm												

Screw lengths Ls up to 600 mm (Lengths > 400 mm with CUT-point) =Preferred size

Annex A4

SPAX®-S

Self-tapping screw with full- thread

Material: Cold rolled wire according to SPAX - Factory Standard

Screws of high-carbon steel

Countersunk head

alternative head geometry

Manufacturer's trade mark or "SPAX"

T-STAR or T-STAR plus

Washer head

Manufacturer's trade mark or "SPAX"

T-STAR or T-STAR plus

Cylindric head

Manufacturer's trade mark or "SPAX"

T-STAR or T-STAR plus

Pan head

Manufacturer's trade mark or "SPAX"

T-STAR or T-STAR plus

A: alternatively with CUT-point

Nominal diameter		10,0										
Type of Head		Countersunk head		Washer head		Cylindric head	Pan head					
d1	thread size	10,0										
	permissible tolerance	±0,5										
dk	head diameter	15,1	18,6	20,0	25,0	12,0	19,0	15,5				
	permissible tolerance	±0,75	±0,93	±1,0	±1,25	±0,6	±0,95	±0,75				
d2	core diameter	6,1										
	permissible tolerance	±0,3										
k	head height max.	4,2	6,0	5,0	5,0	10,0	7,1	5,8				
p	thread pitch	5,0										
	permissible tolerance	±0,1 x p										
T - STAR size		T50		T40		T50	T40					
Thread-free length X	Ls 60-200	max. 15 mm										
	Ls > 200	max. 25 mm										
permissible tolerance of screw length	Ls 60-99	Ls ±2 mm										
	Ls 100-200	Ls ±5 mm										
	Ls > 200	Ls ±15 mm										

Screw lengths Ls to 800 mm possible

 = Preferred size

Annex A44





SPAX®-S

Self-tapping screw with full- thread
Material: Cold rolled wire according to SPAX - Factory Standard
Screws of high-carbon steel

Nominal diameter		12,0						
Type of Head		Countersunk head		Washer head		Cylindric head	Pan head	
d1	thread size	12,0						
	permissible tolerance	±0,6						
dk	head diameter	18,6	22,6	25,0	29,0	14,0	23,0	19,0
	permissible tolerance	±0,93	±1,13	±1,25	±1,45	±0,7	±1,13	±0,95
d2	core diameter	7,35						
	permissible tolerance	±0,35						
k	head height max.	5,2	7,1	6,0		12,0	8,5	7,1
p	thread pitch	6,0						
	permissible tolerance	±0,1 x p						
T - STAR size		T50						
Thread-free length X	Ls 60-99	max. 15 mm						
	Ls 100-200	max. 20 mm						
	Ls > 200	max. 25 mm						
permissible tolerance of screw length	Ls 60-99	Ls ±2 mm						
	Ls 100-200	Ls ±10 mm						
	Ls > 200	Ls ±15 mm						

Screw lengths Ls to 600 mm possible = Preferred size

Annex A45

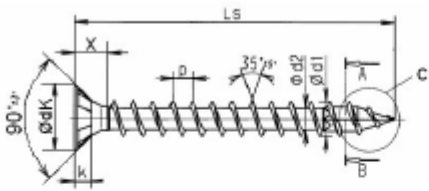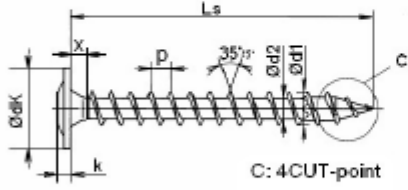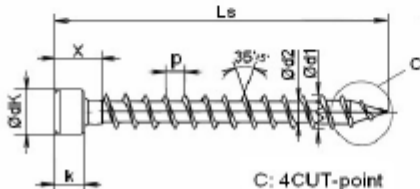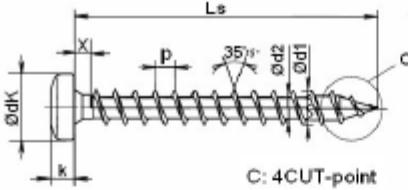	SPAX®	Self-tapping screw with full- thread Material: Cold rolled wire according to SPAX - Factory Standard Stainless steel screws						
 C: 4CUT-point		Manufacturer's trade mark "SPAX"  T-STAR plus						
 C: 4CUT-point		Manufacturer's trade mark "SPAX"  T-STAR plus						
 C: 4CUT-point		 T-STAR plus						
 C: 4CUT-point		Manufacturer's trade mark "SPAX"  T-STAR plus						
		Cross selection A-B  4CUT-point: Square point in core						
Nominal diameter		6,0						
Type of Head		Countersunk head	Washer head	Cylindric head	Pan head			
d1	thread size	6,1						
	permissible tolerance	±0,3						
dk	head diameter	9,7	11,6	13,0	15,0	8,4	11,9	9,9
	permissible tolerance	±0,6		±0,65	±0,75	±0,6		
d2	core diameter	4,0						
	permissible tolerance	±0,3						
k	head height max.	2,9	3,8	2,2	2,4	6,0	4,0	3,4
p	thread pitch	3,6						
	permissible tolerance	±0,1 x p						
T-STAR plus size		T30				T20		
Thread-free length X		Ls 60-200		max. 15 mm				
		Ls 60-99		Ls ±2 mm				
permissible tolerance of screw length		Ls 100-200		Ls ±5 mm				
 =Preferred Version								
Annex A4								

SPAX®-S

Self-tapping screw with full- thread

Material: Cold rolled wire according to SPAX Factory - Standard

Stainless steel screws

alternative head geometry

Manufacturer's trade mark or "SPAX"

T-STAR or T-STAR plus

Washer head

Manufacturer's trade mark or "SPAX"

T-STAR or T-STAR plus

Cylindric head

Manufacturer's trade mark or "SPAX"

T-STAR or T-STAR plus

Pan head

Manufacturer's trade mark or "SPAX"

T-STAR or T-STAR plus

A: alternatively with CUT-point

Nominal diameter		8,0															
Type of Head		Countersunk head	Washer head				Cylindric head	Pan head									
d1	thread size	8,1															
	permissible tolerance	±0,4															
dk	head diameter	11,6	15,1	18,0	20,0	22,0	24,0	10,0	15,5	11,9							
	permissible tolerance	±0,6	±0,75	±0,9	±1,0	±1,1	±1,2	±0,6	±0,75	±0,6							
d2	core diameter	5,0															
	permissible tolerance	±0,3															
k	head height max.	3,0	4,8	4,5				8,0	5,8	4,0							
p	thread pitch	4,0															
	permissible tolerance	±0,1 x p															
T - STAR size		T40								T30							
Thread-free length X	Ls 60-200	max. 15 mm															
	Ls > 200	max. 25 mm															
permissible tolerance of screw length	Ls 60-99	Ls ±2 mm															
	Ls 100-200	Ls ±5 mm															
	Ls > 200	Ls ±15 mm															

Screw lengths Ls up to 600 mm (Lengths > 400 mm with CUT-point)

= Preferred size

Annex A47

SPAX®-S

Self-tapping screw with full- thread
Material: Cold rolled wire according to SPAX - Factory Standard
Stainless steel screws

A: alternatively with CUT-point

Nominal diameter		10,0						
Type of Head		Countersunk head		Washer head		Cylindric head	Pan head	
d1	thread size	10,0						
	permissible tolerance	±0,5						
dk	head diameter	15,1	18,6	20,0	25,0	12,0	19,0	15,5
	permissible tolerance	±0,75	±0,93	±1,0	±1,25	±0,6	±0,95	±0,77
d2	core diameter	6,1						
	permissible tolerance	±0,3						
k	head height max.	4,2	6,0	5,0	5,0	10,0	7,1	5,8
p	thread pitch	5,0						
	permissible tolerance	±0,1 x p						
T - STAR	size	T50		T40		T50		T40
Thread-free length X	Ls 60-200	max. 15 mm						
	Ls > 200	max. 25 mm						
permissible tolerance of screw length	Ls 60-99	Ls ±2 mm						
	Ls 100-200	Ls ±5 mm						
	Ls > 200	Ls ±15 mm						

Screw lengths Ls to 800 mm possible = Preferred size

Annex A48

SPAX®-S

Self-tapping screw with full- thread
Material: Cold rolled wire according to SPAX - Factory Standard
Stainless steel screws

Nominal diameter	12,0										
Type pf Head	Countersunk head		Washer head		Cylindric head	Pan head					
d1	12,0										
	permissible tolerance										
dk	18,6	22,6	25,0	29,0	14,0	23,0	19,0				
	±0,75	±0,93	±1,25	±1,45	±0,7	±1,15	±0,95				
d2	7,35										
	permissible tolerance										
k	5,2	7,1	6,0		12,0	8,5	7,1				
p	6,0										
	permissible tolerance										
T - STAR	T50										
	size										
Thread-free length X	Ls 60-99	max. 15 mm									
	Ls 100-200	max. 20 mm									
	Ls > 200	max. 25 mm									
permissible tolerance of screw length	Ls 60-99	Ls ±2 mm									
	Ls 100-200	Ls ±10 mm									
	Ls > 200	Ls ±15 mm									

Screw lengths Ls to 600 mm possible = Preferred size

Annex A49

SPAX®-S

Hex. head with/without flange

Self-tapping screw with full- thread

Material: Cold rolled wire according to SPAX - Factory Standard


Screws of high-carbon steel

A: alternatively
with CUT-Tip

Nominal diameter		8,0		10,0		12,0	
Type of Head		without flange	with flange	without flange	with flange	without flange	with flange
SW	wrench size	10		13		16	
k	head height max.	6,00	8,5	7,00	9,7	8,00	12,1
Dc	diameter of flange		15,5		19,5		22,5
	permissible tolerance		±0,77		±0,97		±1,12
d1	thread diameter	8,1		10,0		12,0	
	permissible tolerance	±0,4		±0,5		±0,6	
d2	core diameter	5,0		6,1		7,35	
	permissible tolerance	±0,3				±0,35	
p	thread pitch	4,0		5,0		6,0	
	permissible tolerance	±0,1 x p					
thread-free length X	Ls 60-99	max. 15 mm		max. 15 mm		max. 15 mm	
	Ls 100-200					max. 20 mm	
	Ls > 200	max. 25 mm		max. 25 mm		max. 25 mm	
permissible tolerance of screw length	Ls 60-99	Ls ±2 mm				Ls ±2 mm	
	Ls 100-200	Ls ±5 mm				Ls ±10 mm	
	Ls > 200	Ls ±15 mm				Ls ±15 mm	

Screw lengths Ls up to 600 mm possible (at a nominal diameter of 8,0 mm lengths > 400 mm with CUT-point)

Annex A5

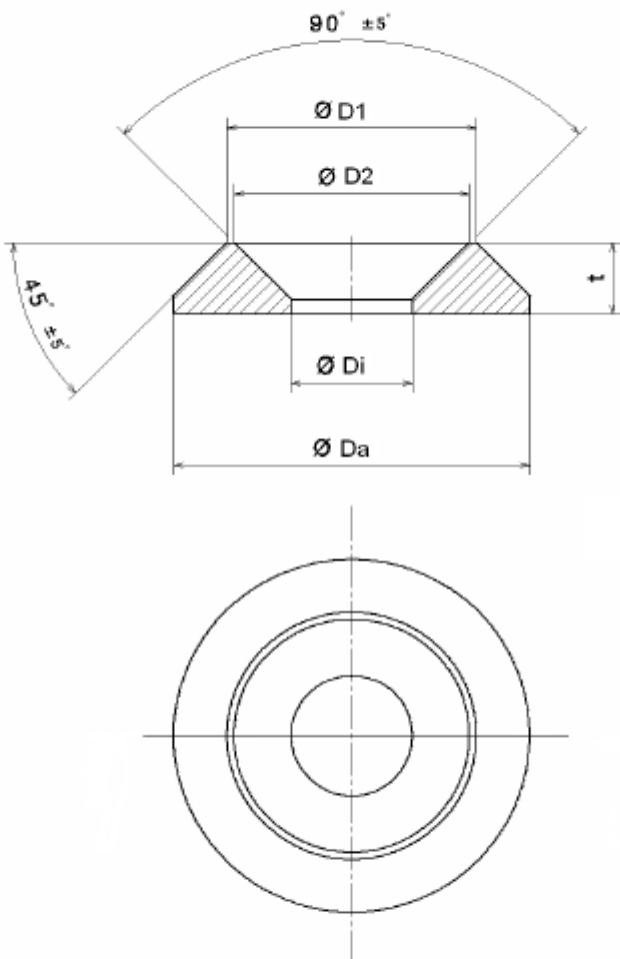	SPAX® Washer	Washer for screws with countersunk and raised countersunk head			
		Material: machining steel Dimensions in mm			
					
Thread size	6,0	8,0	10,0	12,0	Tolerance
ØDa	18,0	25,0	32,0	40,0	± 0,3
ØDi	6,5	8,5	11,0	13,0	
ØD1	13,5	17,5	22,5	27,0	
ØD2	12,5	16,5	21,5	26,0	
t	3,5	5,0	5,6	7,0	
Annex A51					

		Threaded rod with full thread Material: Steel or Stainless steel
---	---	--

Design with hexagon head

Technical drawing of a threaded rod with a hexagonal head. The drawing shows a side view with dimensions: hex head height 20 +15, hex head width 13 ±0.5, thread pitch 6 ±0.6, thread angle 60° ±5', and total length L - 40. It also shows the outer diameter Ø d1 and inner diameter Ø d2. A table lists available lengths L from 800 to 2200. A cross-section view shows a hexagonal head with SW 22 and outer diameter Ø 26. The manufacturer's trade mark ABC or SPAX is indicated.

L
800
1000
1200
1400
1600
1800
2000
2200

Manufacturer's trade mark:
ABC or SPAX

stainless steel	16 ±0.8	12 ±0.8
Steel	16 ±0.8	12 ±0.8
Execution	Ø d ₁	Ø d ₂

- Other lengths 100 - 3000 mm possible
- Length can be changed by cutting the threaded part

Annex A52

Threaded rod with full thread

Material: steel or stainless steel

Screw adapter
available as accessory

L
3000

stainless steel	16 ± 0.8	12 ± 0.6
Steel	16 ± 0.8	12 ± 0.6
Execution	$\varnothing d_1$	$\varnothing d_2$


- Other lengths 100 - 3000 mm possible
- Length can be changed by cutting the threaded part

Version without head

Annex A53

		Self-tapping screw with CUT-point
		Material: cold rolled wire according to SPAX - Factory Standard Screws of high carbon steel

Screw with CUT-point

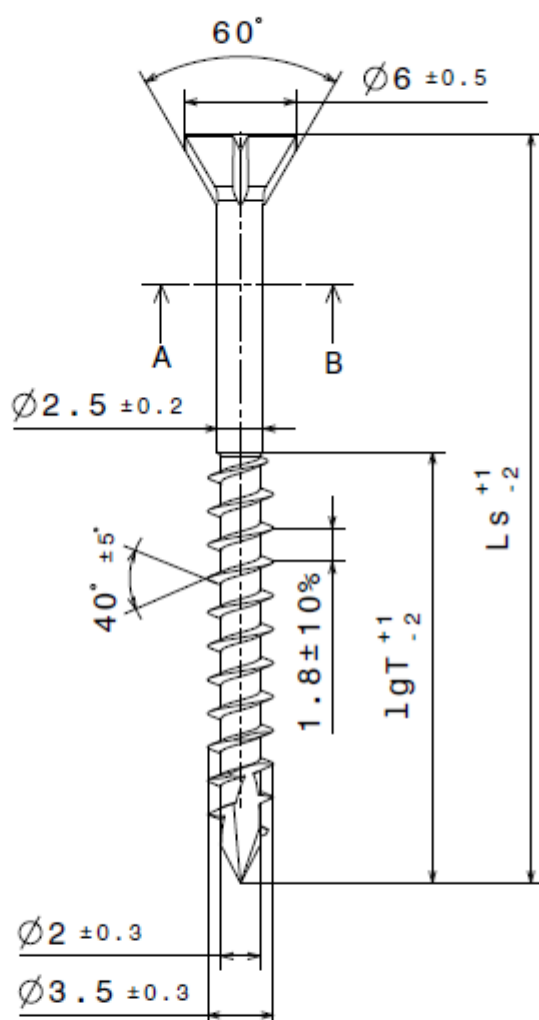

60°

Ø6 ±0.5

Ø2.5 ±0.2

Ø2 ±0.3

Ø3.5 ±0.3

40° ±5°

1.8 ±10%

lgT

Ls


Cross section A-B


Manufacturer's trade mark
T-STAR plus T10


55	35
45	28
35	20
Ls	lgT*


*other thread lengths (lgT)
are acceptable if
lgT > 4 x 3,5


Annex A54

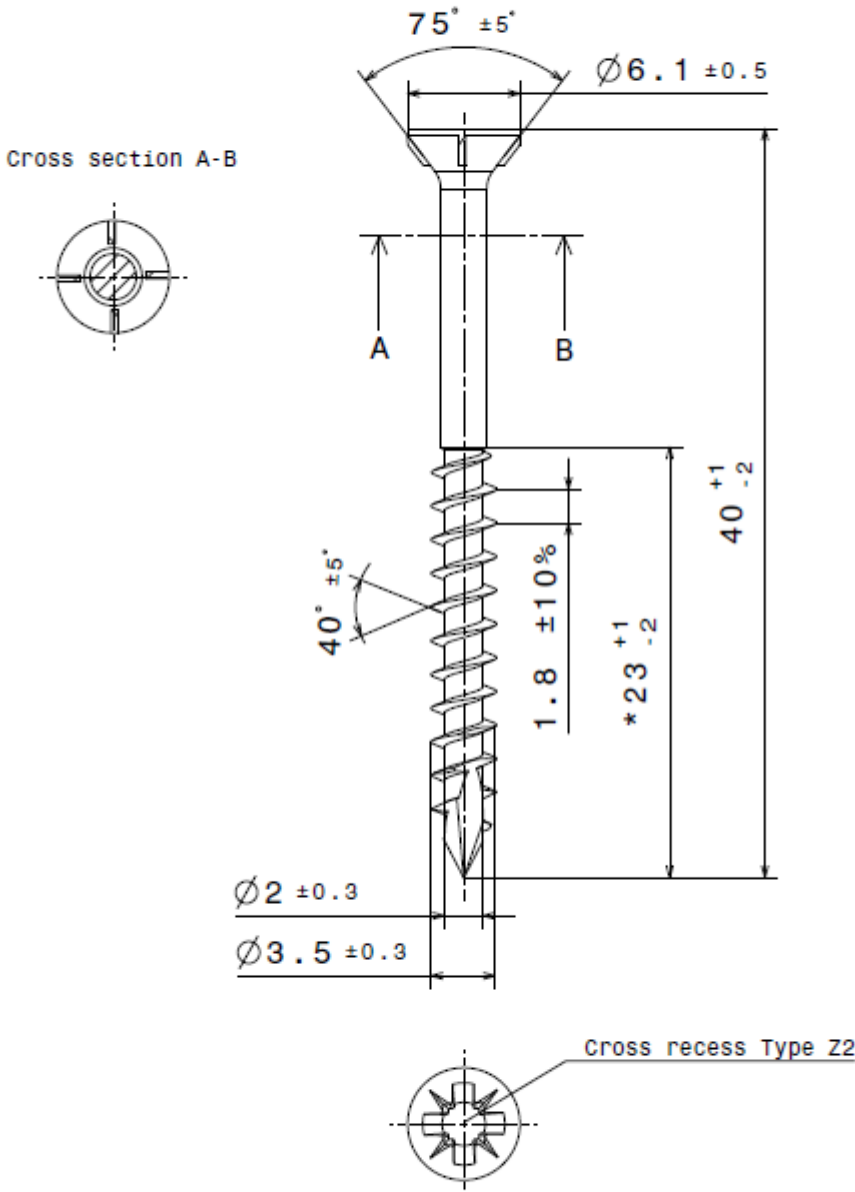
		Self-tapping flat countersunk head screw with CUT-point Material: cold rolled wire according to SPAX - Factory Standard Screws of high carbon steel
Screw with CUT-point  *other thread lengths (lgT) are acceptable if lgT > 4 x 3,5		
Annex A55		

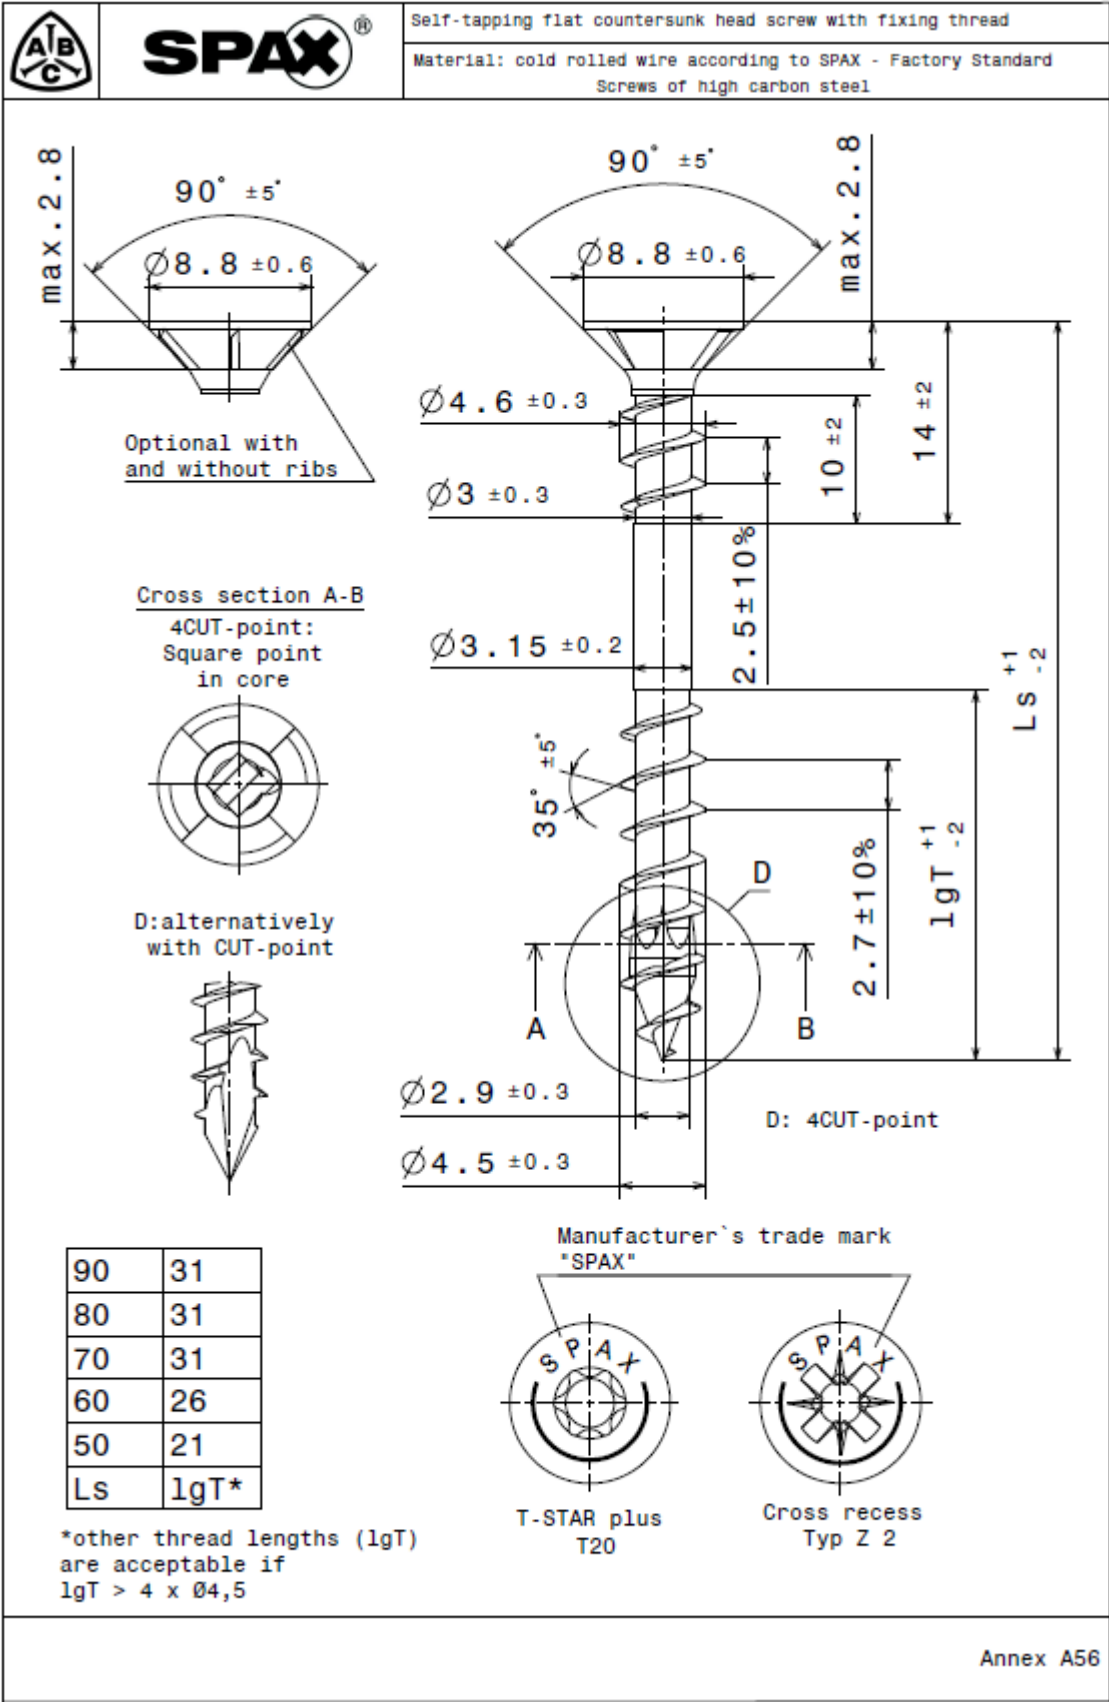


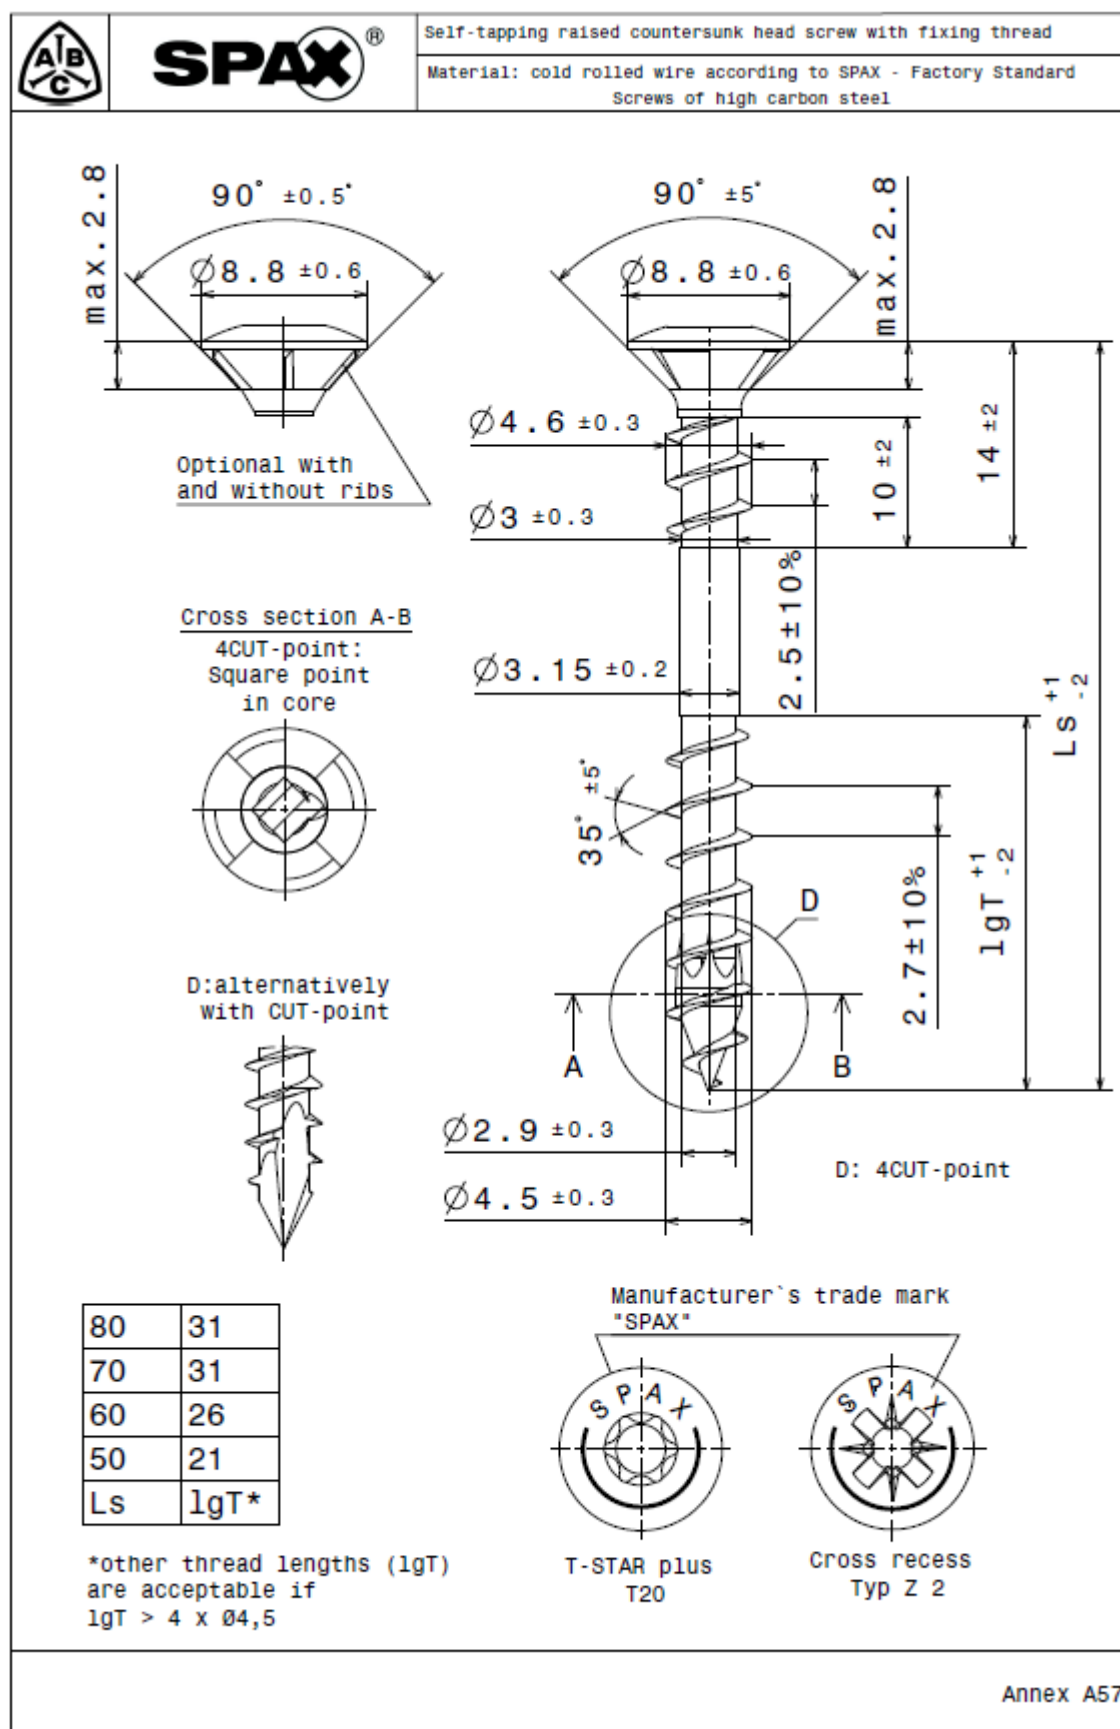


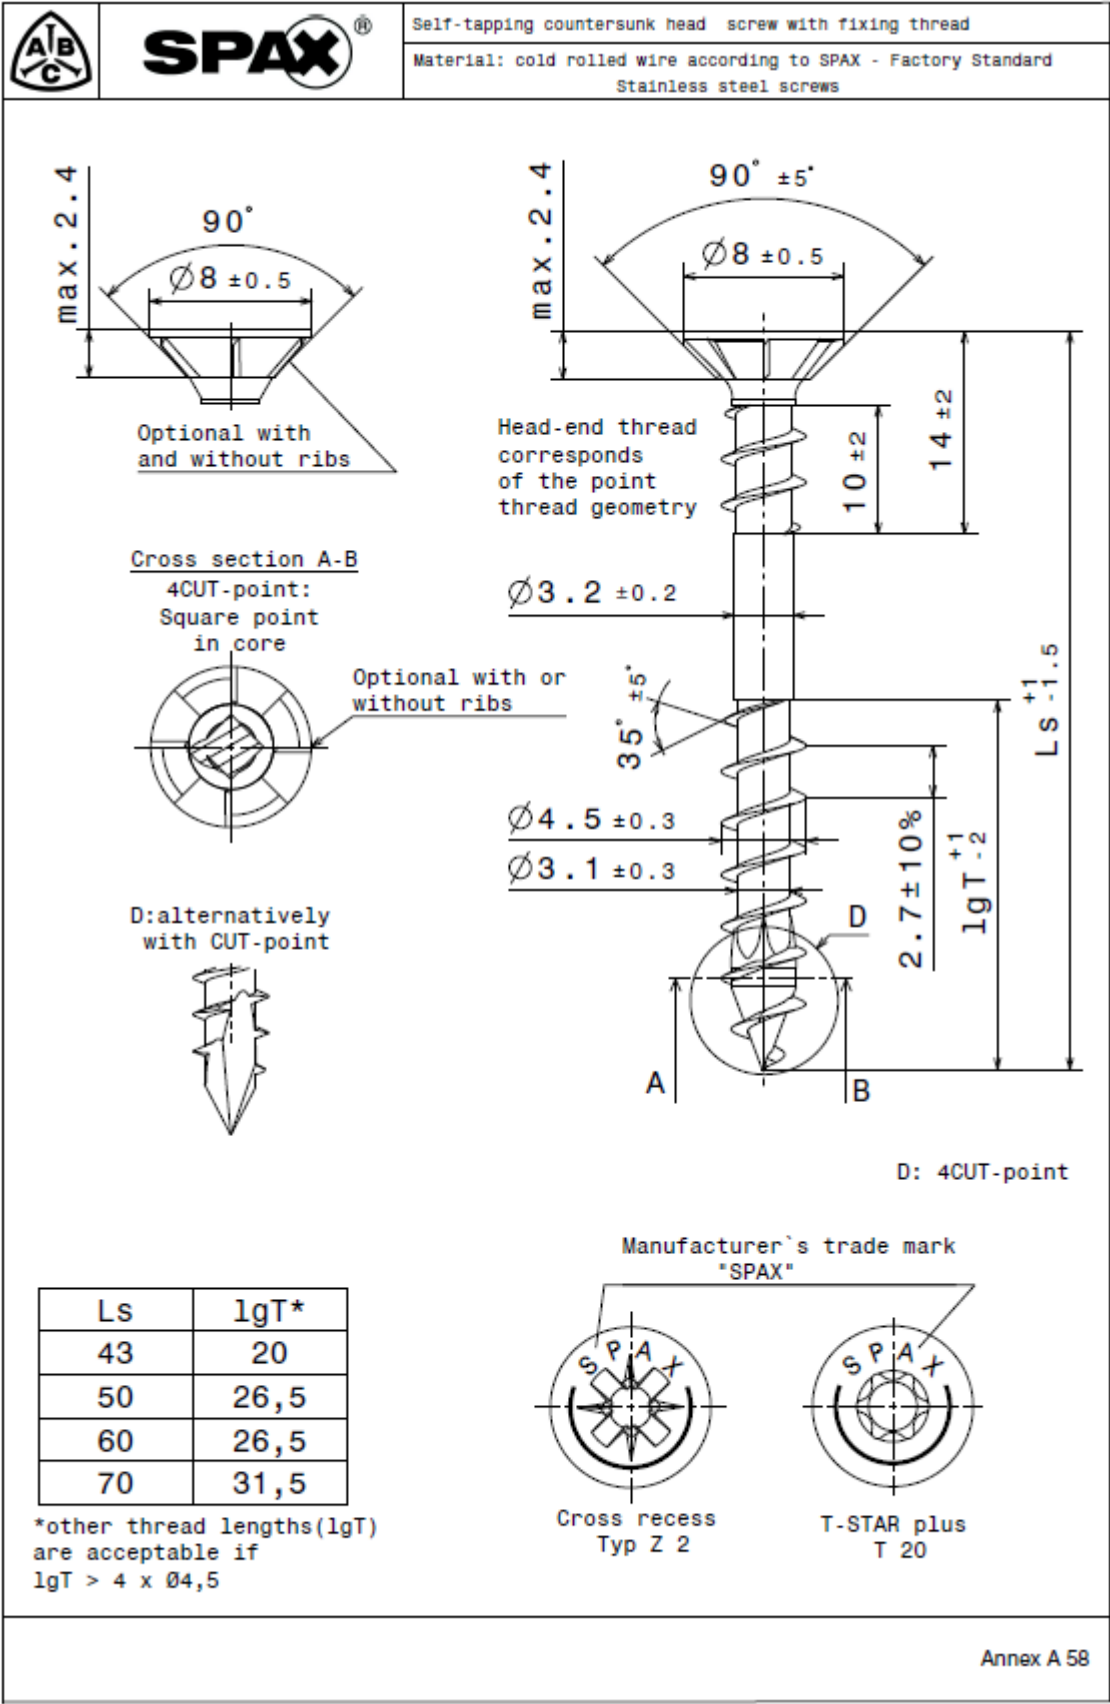


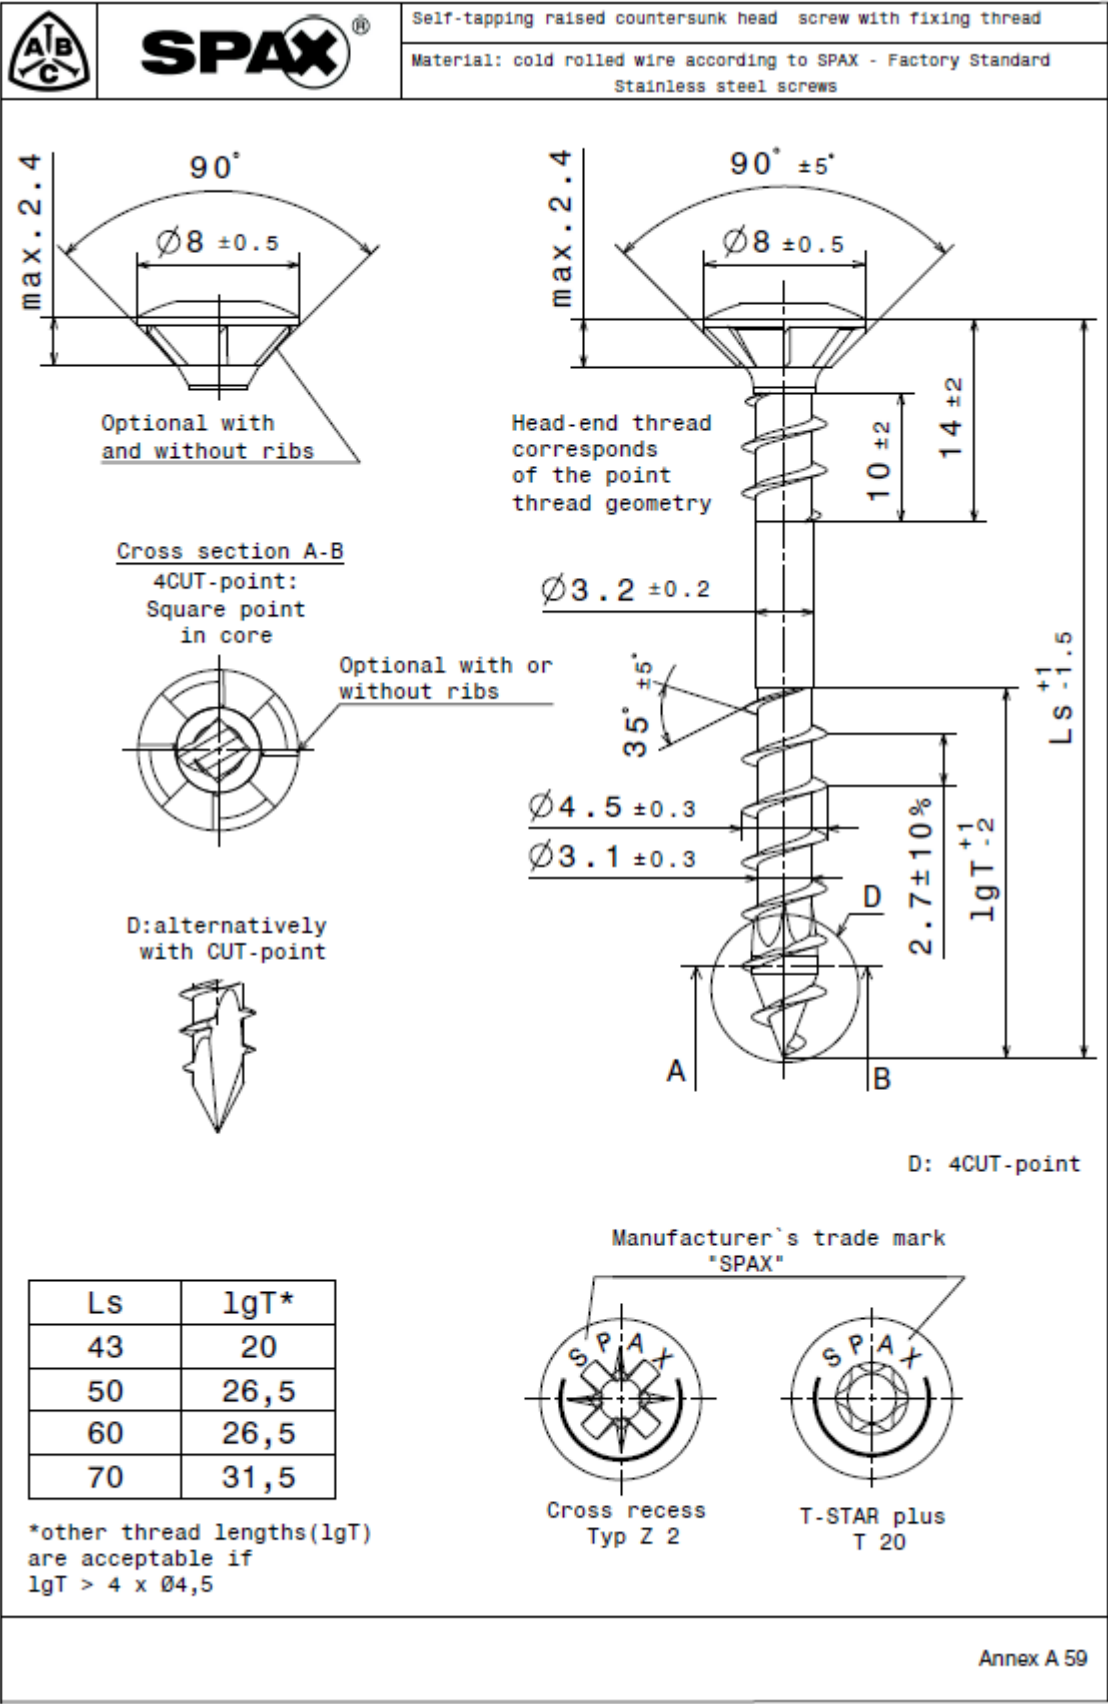


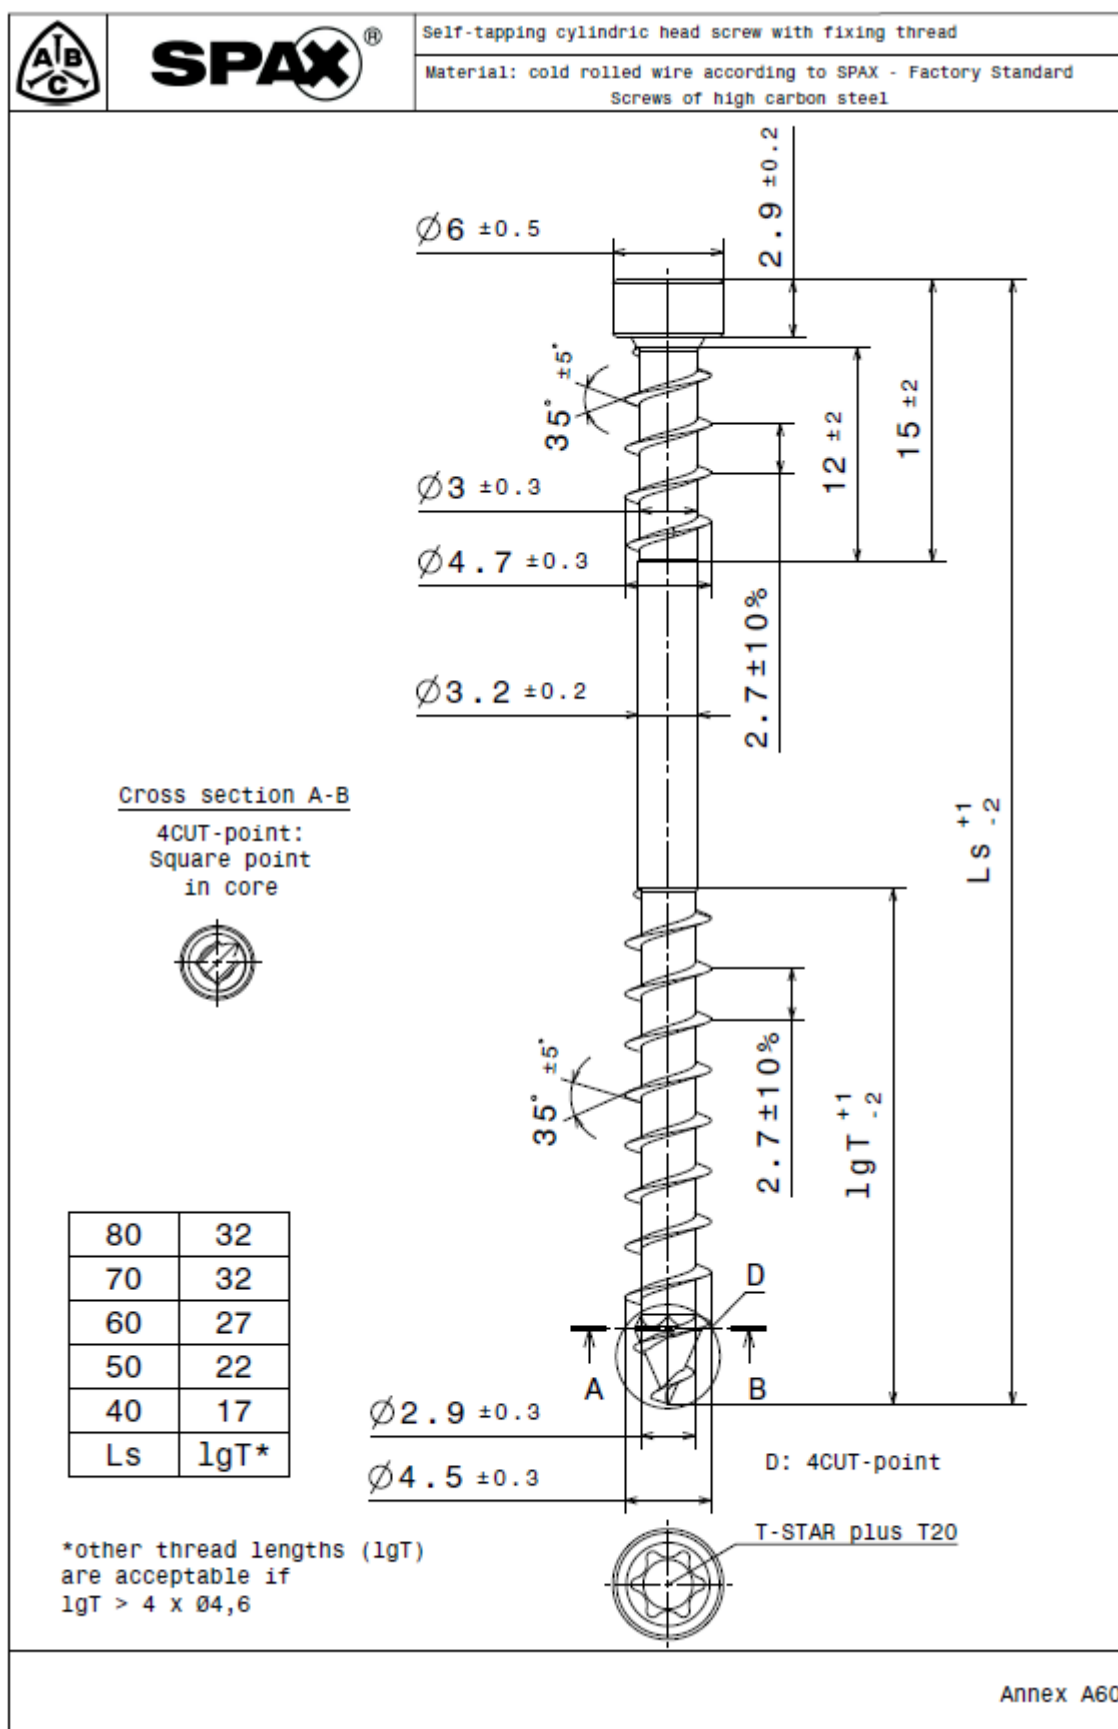



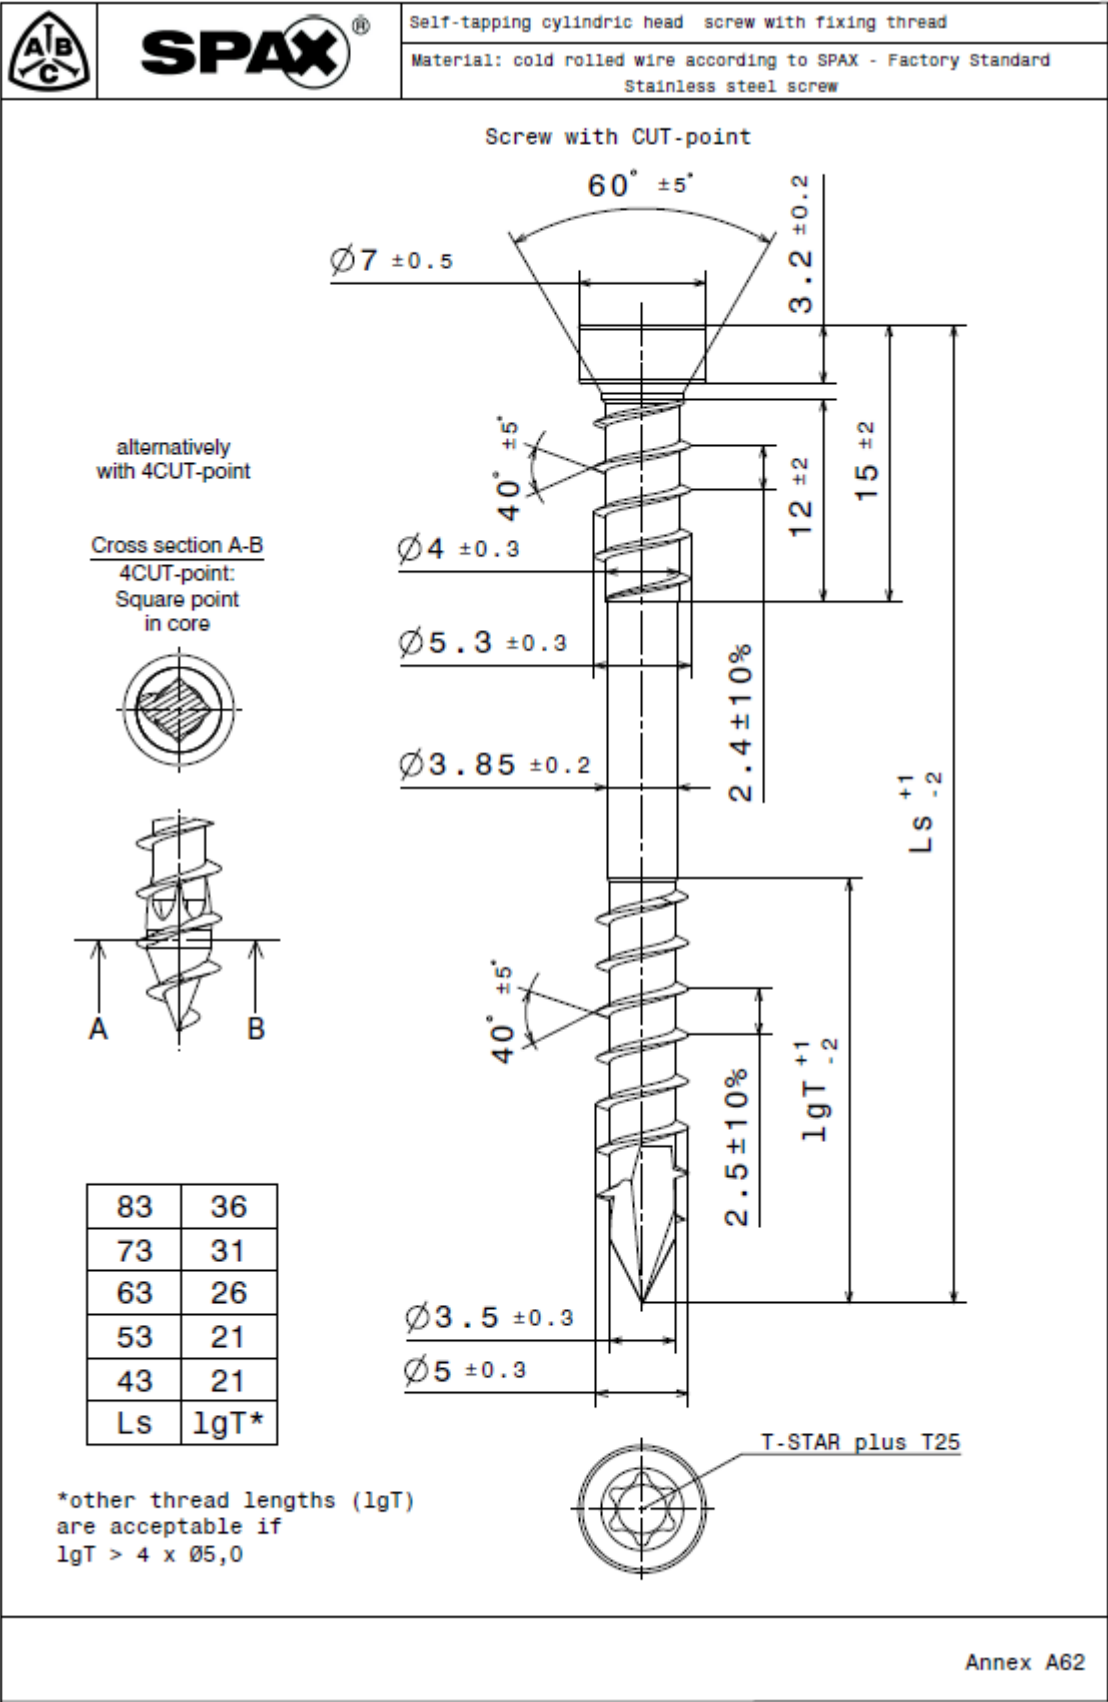


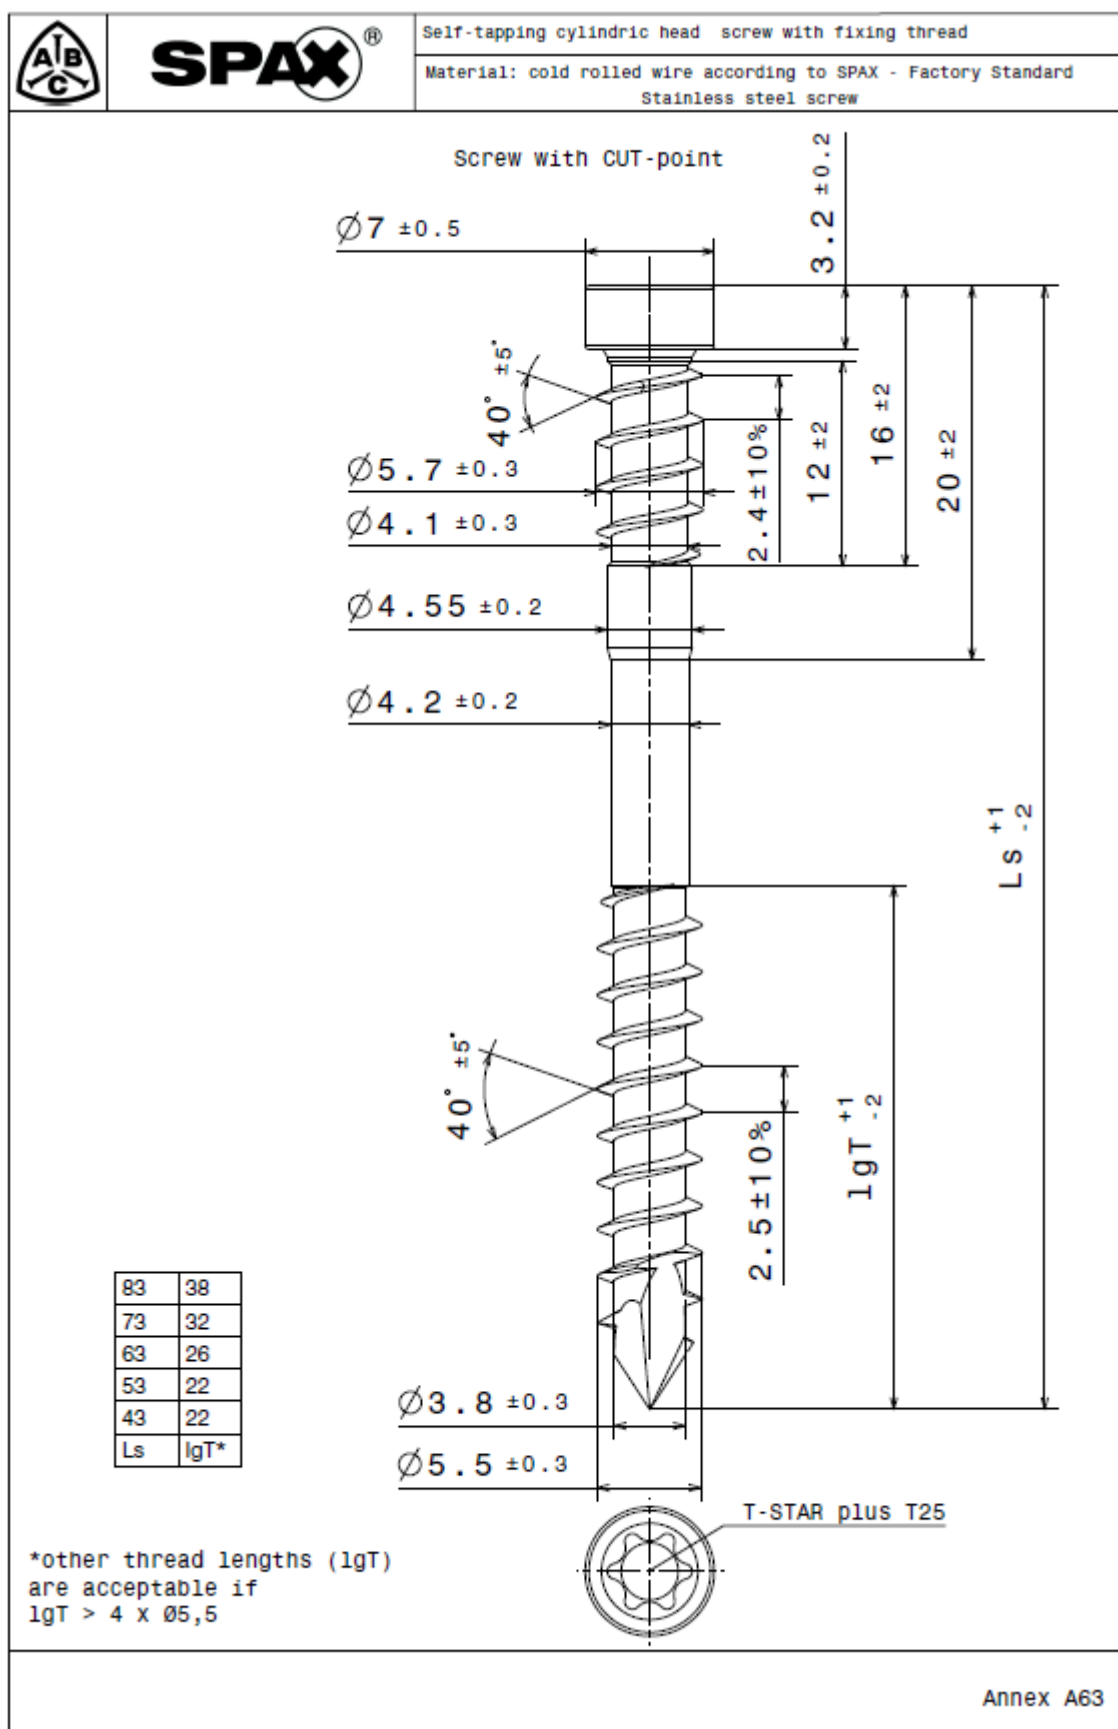

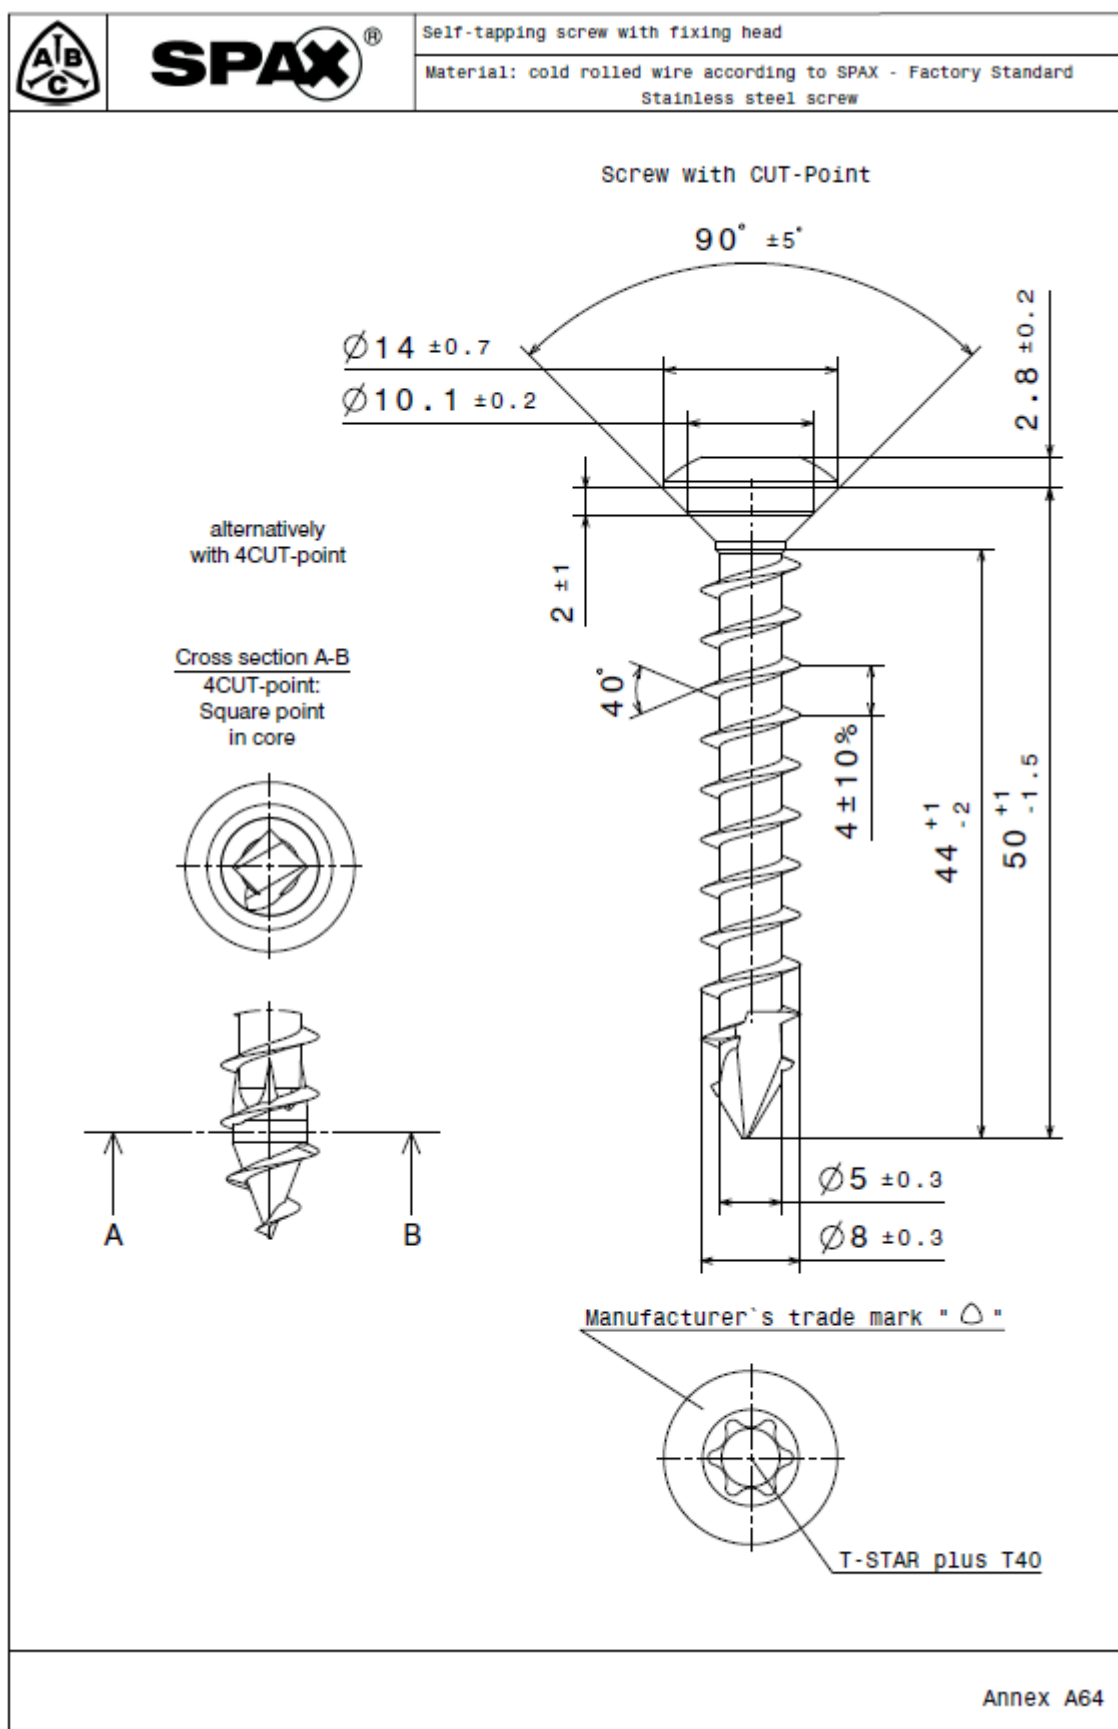

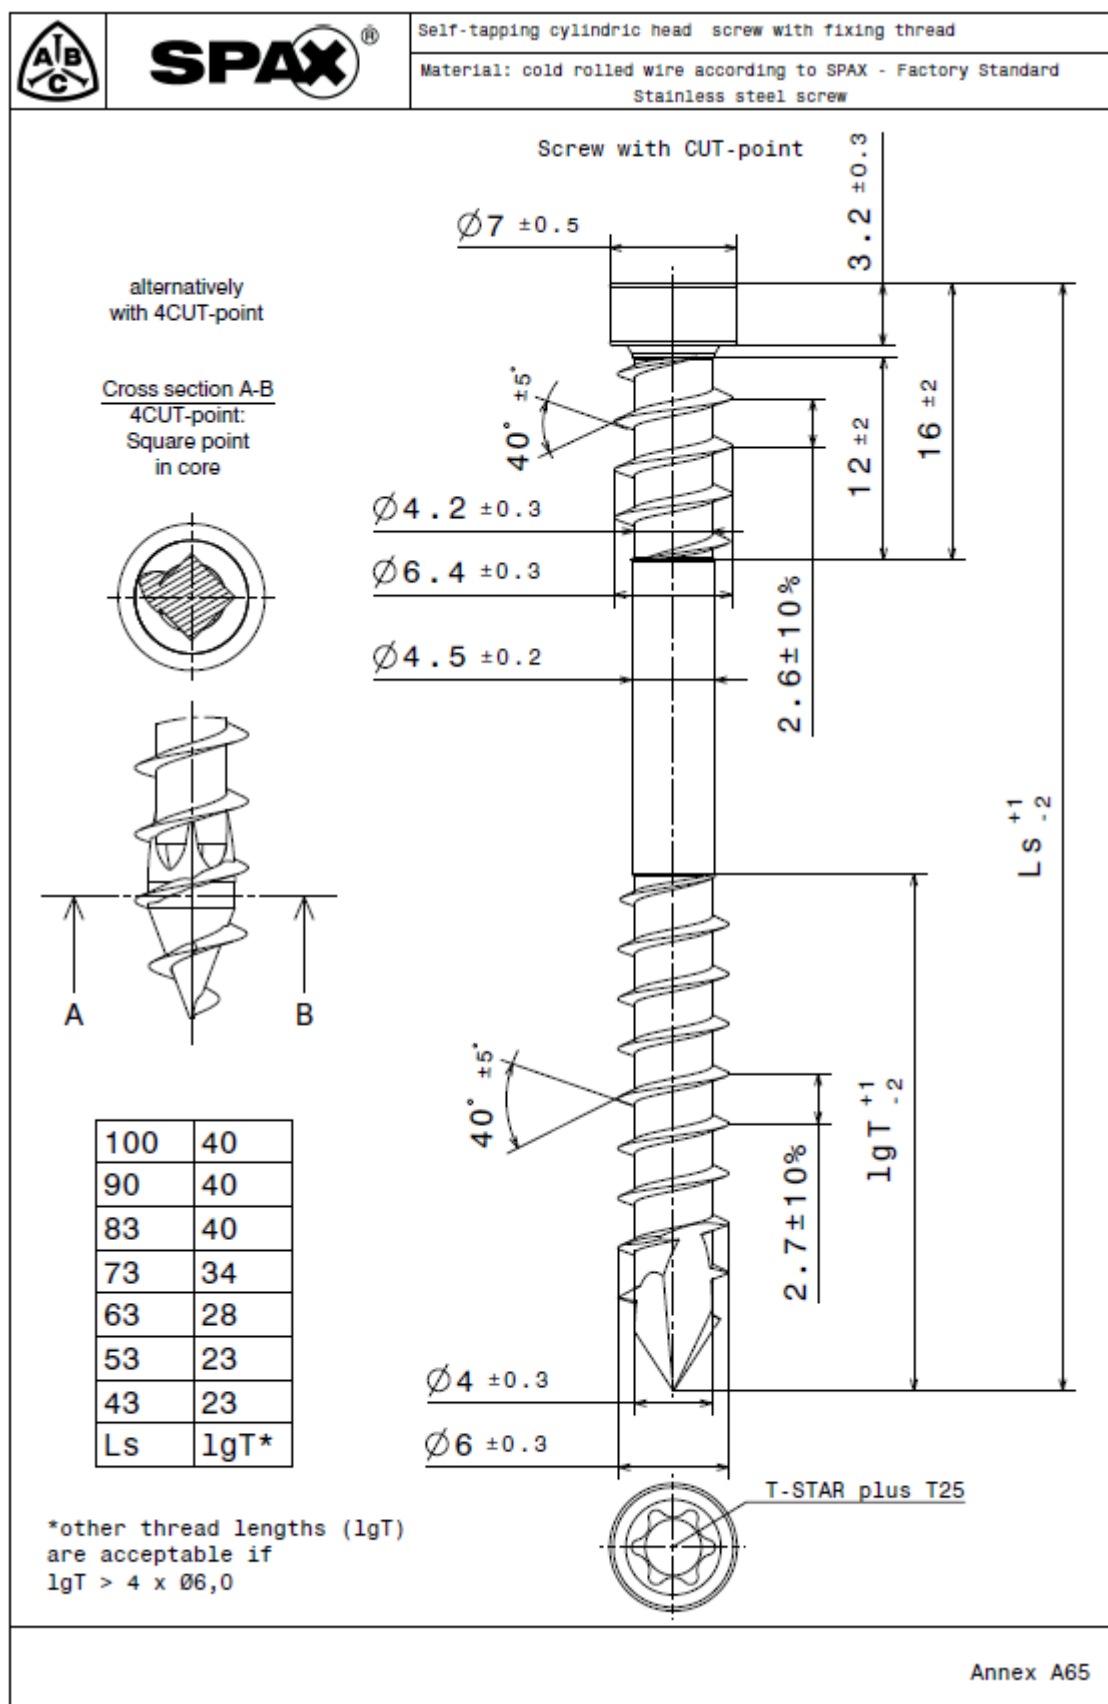

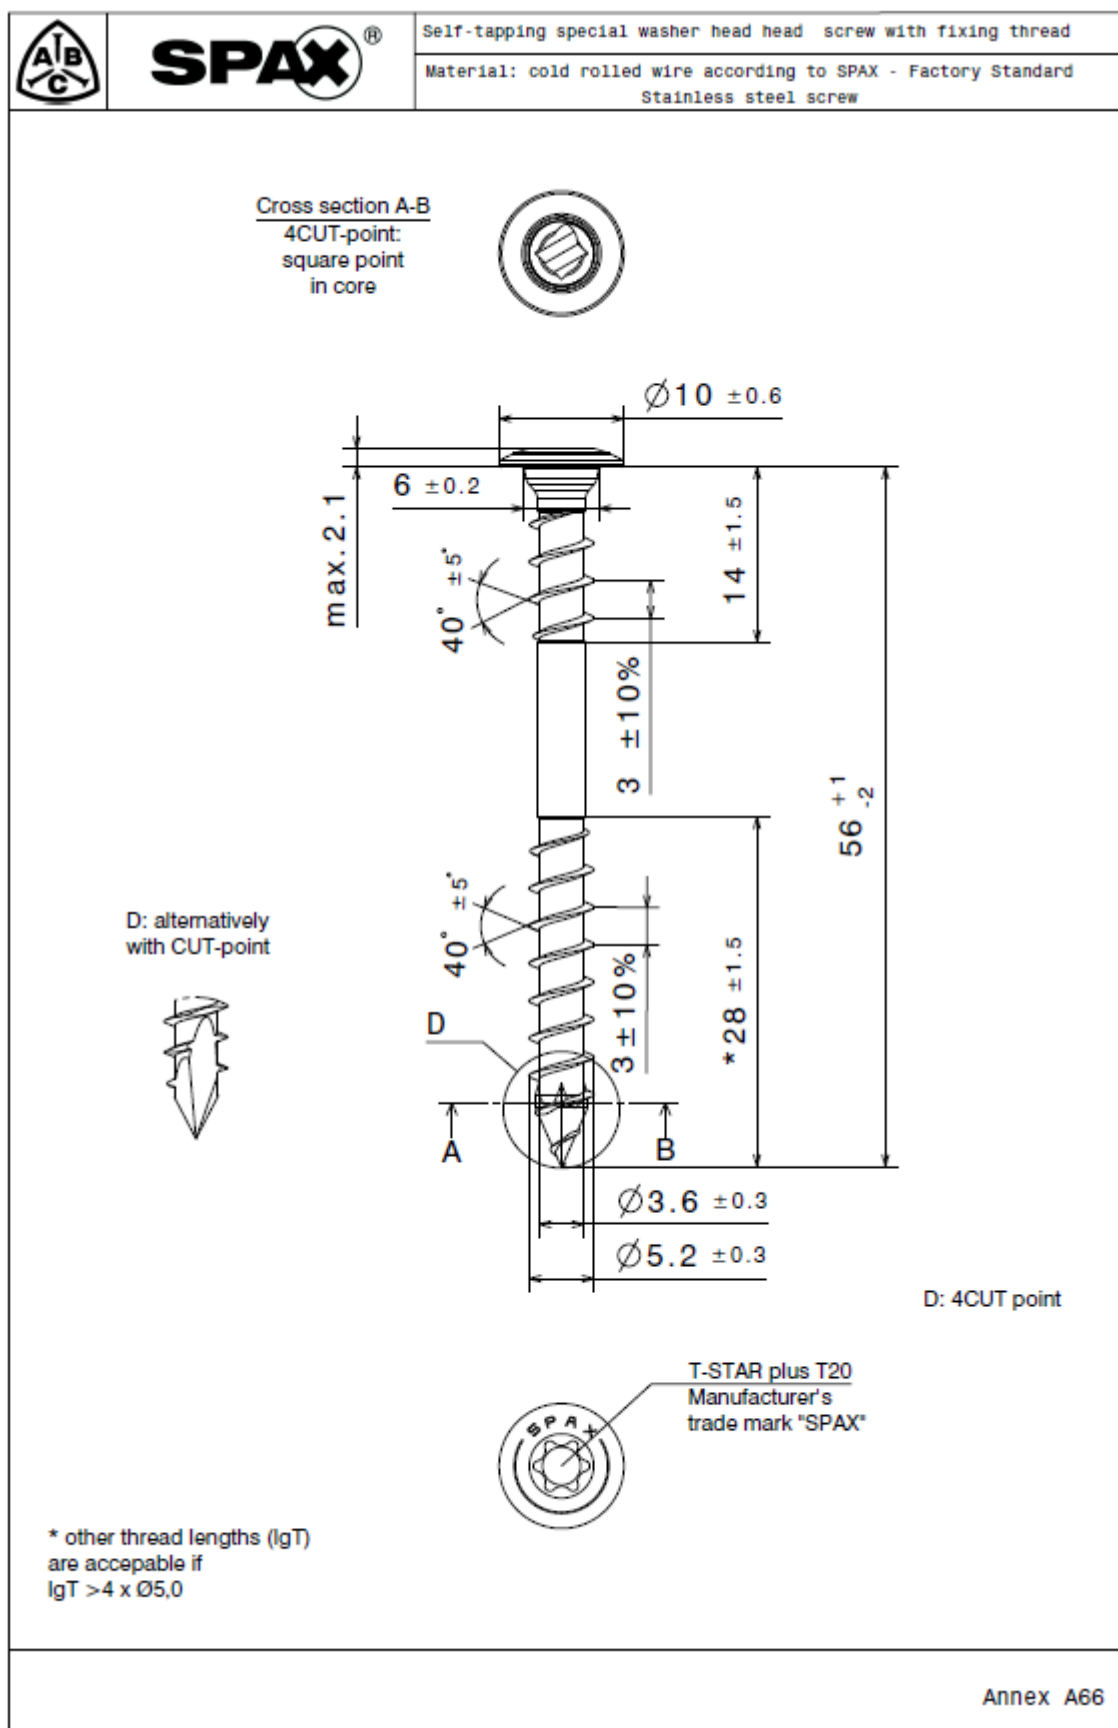

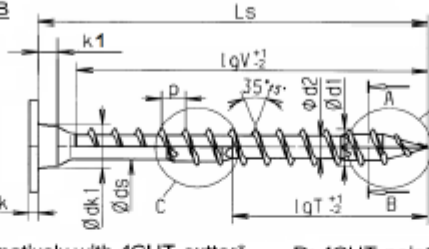	SPAX® Special Washer head	Self-tapping screw with full and partial thread Material: cold rolled wire according to SPAX - Factory Standard Screws of high carbon steel														
Cross section A-B 4CUT-point: square point in core 		 C: alternatively with 4CUT-cutter* D: 4CUT-point  Manufacturer's trade mark "SPAX"														
Nominal diameter	3,5 4,0 4,5 5,0 6,0 8,0 10,0															
d1 thread size	3,5 4,0 4,5 5,0 6,0 8,1 10,0															
dk head diameter	8,7 7,0 10,0 8,0 10,6 8,8 11,6 9,7 13,6 11,6 20,0 15,1 25,0 18,6															
dk1 head diameter	5,1 5,2 5,7 6,6 7,7 9,6 13,5															
d2 core diameter	2,25 2,6 2,9 3,2 3,9 5,0 6,1															
ds shank diameter	2,45 2,85 3,20 3,55 4,30 5,70 6,80															
k head height max.	1,0 1,3 1,5 1,5 2,0 2,5 3,0															
k1 head height	1,3 1,5 1,5 1,5 1,8 2,5 2,5															
p thread pitch	2,1 2,3 2,7 3,0 3,6 4,8 6,0															
T-STAR plus size	T20 T30 T40 T50															
Cross recess size Type Z	2 3															
Ls	Standard thread lengths (full thread = lgV / partial thread = lgT)															
Nom dim.	min max lgV lgT lgV lgT lgV lgT lgV lgT lgV lgT lgV lgT lgV lgT															
17	15,5	17,5	14,0		16,0											
20	18,5	20,5	16,0													
25	23,5	25,5	21,0	18,0	21,0		20,0		20,0							
30	28,5	30,5	27,0	18,0	27,0	18,0	25,0		25,0		24,0					
35	33,5	36,0	32,0	23,0	30,0	23,0	30,0		30,0		29,0					
40	38,5	41,0	37,0	23,0	35,0	23,0	34,0	20,0	35,0	20,0	34,0		32,0			
45	43,5	46,0	40,0	30,0	40,0	30,0	39,0	22,5	39,0	22,0	38,0		37,0			
50	48,5	51,0	40,0	32,0	45,0	32,5	44,0	25,0	44,0	25,0	43,0	24,0	42,0		40,0	
55	53,5	56,0		35,0	50,0	35,0	49,0	27,5	49,0	27,0	48,0	27,0	47,0		45,0	
60	58,5	61,0		35,0	50,0	35,0	54,0	30,0	54,0	30,0	53,0	29,0	52,0		50,0	
65	63,5	66,0		40,0	50,0	37,5	59,0	32,5	59,0	32,0	58,0	32,0	57,0	32,0	55,0	
70	68,5	71,0			50,0	37,5	59,0	34,0	61,0	35,0	61,0	34,0	61,0	32,0	60,0	
75	73,5	76,0			50,0	37,5	59,0	37,0	61,0	37,0	61,0	37,0	61,0	37,0	60,0	
80	78,5	81,0			50,0	37,5	59,0	39,0	61,0	39,0	61,0	38,0	70,0	39,0	70,0	
90	88,5	91,5					59,0	44,0		44,0	61,0	43,0	80,0	39,0	80,0	
100	98,5	101,5						49,0		49,0	61,0	48,0	80,0	47,0	80,0	50,0
110	108,5	111,5						54,0		54,0	68,0*	53,0	80,0	47,0	80,0	50,0
120	118,5	121,5								59,0	68,0*	56,0	80,0	57,0	80,0	60,0
130	128,0	132,0									68,0*	61,0	80,0	61,0	80,0	60,0
140	138,0	142,0										68,0*		70,0		70,0
150	148,0	152,0										68,0*		70,0		70,0
to																
160	158,0	162,0										68,0*		80,0		80,0
600	597,0	602,0											80,0		80,0	
Screws of Ø6,0mm with partial thread additionally in lengths of 180 to 300 mm, in steps of 20 mm, LgT= 68,0 mm* Intermediate lengths on Ls possible =Preferred size			Other thread lengths in the range ≥4xdl1 to max. standard length permitted. * Design C with lgT= max. 65,0 mm													
Annex A67																

SPAX®-S

Special Washer Head

Self-tapping screw with partial thread

Material: Cold rolled wire according to SPAX - Factory Standard

Screws of high-carbon steel



A: alternatively with
CUT-point

Nominal diameter			12,0				
Type of Head			Special Washer head				
d1	thread size		12,0				
	permissible tolerance		±0,30				
dk	head diameter		18,6	25,0	29,0		
	permissible tolerance		±0,93	±1,25	±1,45		
dk1	diameter		13,5				
	permissible tolerance		±0,6				
d2	core diameter		7,35				
	permissible tolerance		±0,35				
k	head height max.		4,0				
k1	head height		2,5				
	permissible tolerance		±0,5				
p	thread pitch		6,0				
	permissible tolerance		±0,1 x p				
T - STAR plus			T50				
Ls			Standard thread lengths partial thread = lgT)				
Nom.dim.	min	max	lgT				
80	78,5	81,5	50,0				
90	88,5	91,5	55,0				
100	98,5	101,5	60,0				
110	108,5	111,5	80,0				
120	118,5	121,5	80,0				
130	128,0	132,0	80,0				
140	138,0	142,0	80,0				
150	148,0	152,0	100,0				
160	158,0	162,0	100,0				
180	178,0	182,0	100,0				
200	198,0	202,0	100,0				
to							
600	597,0	602,0	100,0				

Screw lengths Ls to 600 mm possible

Other thread lengths in the range $\geq 4 \times d1$ to max. standard length permitted

Annex A68

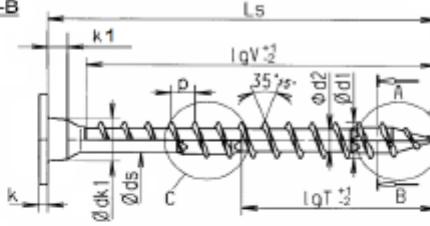	SPAX® Special Washer head	Self-tapping screw with full and partial thread Material: cold rolled wire according to SPAX - Factory Standard Stainless steel screw																																																																																																																																																																																																																												
Cross section A-B 4CUT-point: square point in core 																																																																																																																																																																																																																														
Manufacturer's trade mark "SPAX"  Cross recess Type Z T-STAR plus		<table border="1"> <tr> <td>Nominal diameter</td><td>3,5</td><td>4,0</td><td>4,5</td><td>5,0</td><td>6,0</td><td>8,0</td><td>10,0</td></tr> <tr> <td>d1 thread size</td><td>3,5</td><td>4,0</td><td>4,5</td><td>5,0</td><td>6,0</td><td>8,1</td><td>10,0</td></tr> <tr> <td>permissible tolerance</td><td></td><td></td><td>±0,3</td><td></td><td></td><td>±0,4</td><td>±0,5</td></tr> <tr> <td>dk head diameter</td><td>8,7</td><td>7,0</td><td>10,0</td><td>8,0</td><td>10,6</td><td>8,8</td><td>11,6</td><td>9,7</td><td>13,6</td><td>11,6</td><td>20,0</td><td>15,1</td><td>25,0</td><td>18,6</td></tr> <tr> <td>permissible tolerance</td><td></td><td></td><td>±0,6</td><td></td><td></td><td>±0,65</td><td>±0,6</td><td>±1,0</td><td>±0,75</td><td>±1,25</td><td>±0,9</td><td></td><td></td><td></td></tr> <tr> <td>dk1 diameter</td><td>5,1</td><td>5,2</td><td>5,7</td><td>6,6</td><td>7,7</td><td>9,6</td><td>13,5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>permissible tolerance</td><td></td><td></td><td>±0,3</td><td></td><td></td><td>±0,4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>d2 core diameter</td><td>2,45</td><td>2,75</td><td>3,1</td><td>3,4</td><td>3,9</td><td>5,3</td><td>6,1</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>permissible tolerance</td><td>+0,1/-0,3</td><td></td><td></td><td></td><td>±0,3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>ds shank diameter</td><td>2,60</td><td>3,1</td><td>3,30</td><td>3,75</td><td>4,30</td><td>5,70</td><td>6,80</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>permissible tolerance</td><td></td><td></td><td>±0,1</td><td></td><td></td><td>±0,25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>k head height max.</td><td>1,0</td><td>1,3</td><td>1,5</td><td>1,5</td><td>2,0</td><td>2,5</td><td>3,0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>k1 head height</td><td>1,3</td><td>1,5</td><td>1,5</td><td>1,5</td><td>1,8</td><td>2,5</td><td>2,5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>permissible tolerance</td><td></td><td></td><td>±0,3</td><td></td><td></td><td>±0,5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>p thread pitch</td><td>2,1</td><td>2,3</td><td>2,7</td><td>3,0</td><td>3,6</td><td>4,8</td><td>6,0</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>permissible tolerance</td><td></td><td></td><td></td><td>±0,1 x p</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>		Nominal diameter	3,5	4,0	4,5	5,0	6,0	8,0	10,0	d1 thread size	3,5	4,0	4,5	5,0	6,0	8,1	10,0	permissible tolerance			±0,3			±0,4	±0,5	dk head diameter	8,7	7,0	10,0	8,0	10,6	8,8	11,6	9,7	13,6	11,6	20,0	15,1	25,0	18,6	permissible tolerance			±0,6			±0,65	±0,6	±1,0	±0,75	±1,25	±0,9				dk1 diameter	5,1	5,2	5,7	6,6	7,7	9,6	13,5								permissible tolerance			±0,3			±0,4									d2 core diameter	2,45	2,75	3,1	3,4	3,9	5,3	6,1								permissible tolerance	+0,1/-0,3				±0,3										ds shank diameter	2,60	3,1	3,30	3,75	4,30	5,70	6,80								permissible tolerance			±0,1			±0,25									k head height max.	1,0	1,3	1,5	1,5	2,0	2,5	3,0								k1 head height	1,3	1,5	1,5	1,5	1,8	2,5	2,5								permissible tolerance			±0,3			±0,5									p thread pitch	2,1	2,3	2,7	3,0	3,6	4,8	6,0								permissible tolerance				±0,1 x p										
Nominal diameter	3,5	4,0	4,5	5,0	6,0	8,0	10,0																																																																																																																																																																																																																							
d1 thread size	3,5	4,0	4,5	5,0	6,0	8,1	10,0																																																																																																																																																																																																																							
permissible tolerance			±0,3			±0,4	±0,5																																																																																																																																																																																																																							
dk head diameter	8,7	7,0	10,0	8,0	10,6	8,8	11,6	9,7	13,6	11,6	20,0	15,1	25,0	18,6																																																																																																																																																																																																																
permissible tolerance			±0,6			±0,65	±0,6	±1,0	±0,75	±1,25	±0,9																																																																																																																																																																																																																			
dk1 diameter	5,1	5,2	5,7	6,6	7,7	9,6	13,5																																																																																																																																																																																																																							
permissible tolerance			±0,3			±0,4																																																																																																																																																																																																																								
d2 core diameter	2,45	2,75	3,1	3,4	3,9	5,3	6,1																																																																																																																																																																																																																							
permissible tolerance	+0,1/-0,3				±0,3																																																																																																																																																																																																																									
ds shank diameter	2,60	3,1	3,30	3,75	4,30	5,70	6,80																																																																																																																																																																																																																							
permissible tolerance			±0,1			±0,25																																																																																																																																																																																																																								
k head height max.	1,0	1,3	1,5	1,5	2,0	2,5	3,0																																																																																																																																																																																																																							
k1 head height	1,3	1,5	1,5	1,5	1,8	2,5	2,5																																																																																																																																																																																																																							
permissible tolerance			±0,3			±0,5																																																																																																																																																																																																																								
p thread pitch	2,1	2,3	2,7	3,0	3,6	4,8	6,0																																																																																																																																																																																																																							
permissible tolerance				±0,1 x p																																																																																																																																																																																																																										
T-STAR plus size Cross recess size Type Z		T20 2 T30 3 T40 T50																																																																																																																																																																																																																												
Ls		Standard thread lengths (full thread = lgV / partial thread = lgT)																																																																																																																																																																																																																												
Nom. dim.	min max		lgV lgT lgV lgT lgV lgT lgV lgT lgV lgT lgV lgT lgV lgT lgV lgT																																																																																																																																																																																																																											
17	15,5	17,5	14,0																																																																																																																																																																																																																											
20	18,5	20,5	16,0		16,0																																																																																																																																																																																																																									
25	23,5	25,5	21,0	18,0	21,0		20,0		20,0																																																																																																																																																																																																																					
30	28,5	30,5	27,0	18,0	27,0	18,0	25,0		25,0		24,0																																																																																																																																																																																																																			
35	33,5	36,0	32,0	23,0	30,0	23,0	30,0		30,0		29,0																																																																																																																																																																																																																			
40	38,5	41,0	37,0	23,0	35,0	23,0	34,0	20,0	35,0	20,0	34,0		32,0																																																																																																																																																																																																																	
45	43,5	46,0	40,0	30,0	40,0	30,0	39,0	22,5	39,0	22,0	38,0		37,0																																																																																																																																																																																																																	
50	48,5	51,0	40,0	32,0	45,0	23,5	44,0	25,0	44,0	25,0	43,0	24,0	42,0		40,0																																																																																																																																																																																																															
55	53,5	56,0		35,0	50,0	35,0	49,0	27,5	49,0	27,0	48,0	27,0	47,0		45,0																																																																																																																																																																																																															
60	58,5	61,0		35,0	50,0	35,0	54,0	30,0	54,0	30,0	53,0	29,0	52,0		50,0																																																																																																																																																																																																															
65	63,5	66,0		40,0	50,0	37,5	59,0	32,5	59,0	32,0	58,0	32,0	57,0	32,0	55,0																																																																																																																																																																																																															
70	68,5	71,0			50,0	37,5	59,0	34,0	61,0	35,0	61,0	34,0	61,0	32,0	60,0																																																																																																																																																																																																															
75	73,5	76,0			50,0	37,5	59,0	37,0	61,0	37,0	61,0	37,0	61,0	37,0	60,0																																																																																																																																																																																																															
80	78,5	81,0			50,0	37,5	59,0	39,0	61,0	39,0	61,0	38,0	70,0	39,0	70,0																																																																																																																																																																																																															
90	88,5	91,5					59,0	44,0		44,0	61,0	43,0	80,0	39,0	80,0																																																																																																																																																																																																															
100	98,5	101,5						49,0		49,0	61,0	48,0	80,0	47,0	80,0																																																																																																																																																																																																															
110	108,5	111,5						54,0		54,0	68,0*	53,0	80,0	47,0	80,0																																																																																																																																																																																																															
120	118,5	121,5								59,0	68,0*	56,0	80,0	57,0	80,0																																																																																																																																																																																																															
130	128,0	132,0									68,0*	61,0	80,0	61,0	80,0																																																																																																																																																																																																															
140	138,0	142,0										68,0*		70,0	70,0																																																																																																																																																																																																															
150	148,0	152,0										68,0*		70,0	70,0																																																																																																																																																																																																															
to																																																																																																																																																																																																																														
160	158,0	162,0										68,0*		80,0	80,0																																																																																																																																																																																																															
600	597,0	602,0											80,0		80,0																																																																																																																																																																																																															

 || Screws of Ø6,0mm with partial thread additionally in lengths of 180 to 300 mm, in steps of 20 mm, LgT= 68,0 mm* Intermediate lengths on Ls possible =Preferred size | | Other thread lengths in the range ≥4xd1 to max. standard length permitted. * Design C with lgT= max. 65,0 mm | |
| Annex A69 | | | |

SPAX®-S

Special Washer Head

Self-tapping screw with partial thread

Material: Cold rolled wire according to SPAX - Factory Standard

Stainless steel screw

A: alternatively with CUT-point

Nominal diameter			12,0	
Type of Head			Special Washer head	
d1	thread size		12,0	
	permissible tolerance		±0,60	
dk	head diameter	18,6	25,0	29,0
	permissible tolerance	±0,93	±1,25	±1,45
dk1	diameter	13,5		
	permissible tolerance	±0,6		
d2	core diameter	7,35		
	permissible tolerance	±0,35		
k	head height max.	4,0		
k1	head height	2,5		
	permissible tolerance	±0,5		
p	thread pitch	6,0		
	permissible tolerance	±0,1 x p		
T - STAR plus size		T50		
Ls		Standard thread lengths partial thread = lgT)		
Nom. dim.	min	max	lgT	
80	78,5	81,5	50,0	
90	88,5	91,5	55,0	
100	98,5	101,5	60,0	
110	108,5	111,5	80,0	
120	118,5	121,5	80,0	
130	128,0	132,0	80,0	
140	138,0	142,0	80,0	
150	148,0	152,0	100,0	
160	158,0	162,0	100,0	
180	178,0	182,0	100,0	
200	198,0	202,0	100,0	
to				
600	597,0	602,0	100,0	


Screw lengths Ls to 600 mm possible

Other thread lengths in the range ≥4xd1 to max. standard length permitted

Annex A70

		Self-tapping flat countersunk head screw with adjusting thread	
		Material: cold rolled wire according to SPAX - Factory Standard Screws of high carbon steel	

alternative head geometries

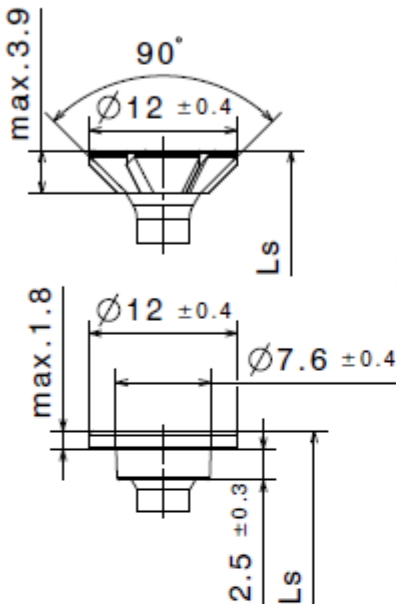

max. 3.9

90°

Ø 12 ± 0.4

Ls

max. 1.8


Ø 12 ± 0.4

Ø 7.6 ± 0.4

2.5 ± 0.3

Ls

optional with or without ribs

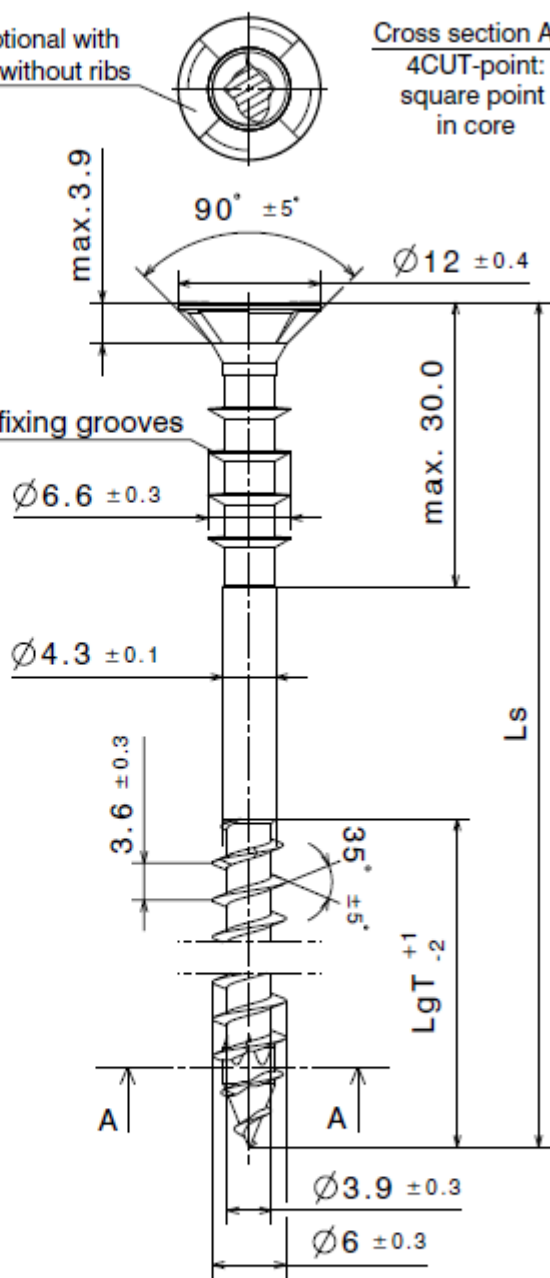

Cross section A-A
4CUT-point:
square point
in core

max. 3.9

90° ± 5°

Ø 12 ± 0.4

max. 30.0

3-5 fixing grooves

Ø 6.6 ± 0.3

Ø 4.3 ± 0.1

3.6 ± 0.3

55°

LgT +1 -2

Ø 3.9 ± 0.3

Ø 6 ± 0.3

Ls


160	156,0	162,0	68,0
145	142,0	147,0	68,0
130	128,0	132,0	68,0
120	118,5	121,5	68,0
110	108,5	111,5	68,0
100	98,5	101,5	61,0
90	88,5	91,5	61,0
80	78,5	81,0	46,0
70	68,5	71,0	37,0
60	58,5	61,0	32,0
Ls	Ls min.	Ls max.	LgT

Intermediate lengths on Ls possible.
Other thread lengths in the range ≥ 4xd1
to max. standard length permitted.



T-STAR plus T30

Annex A72

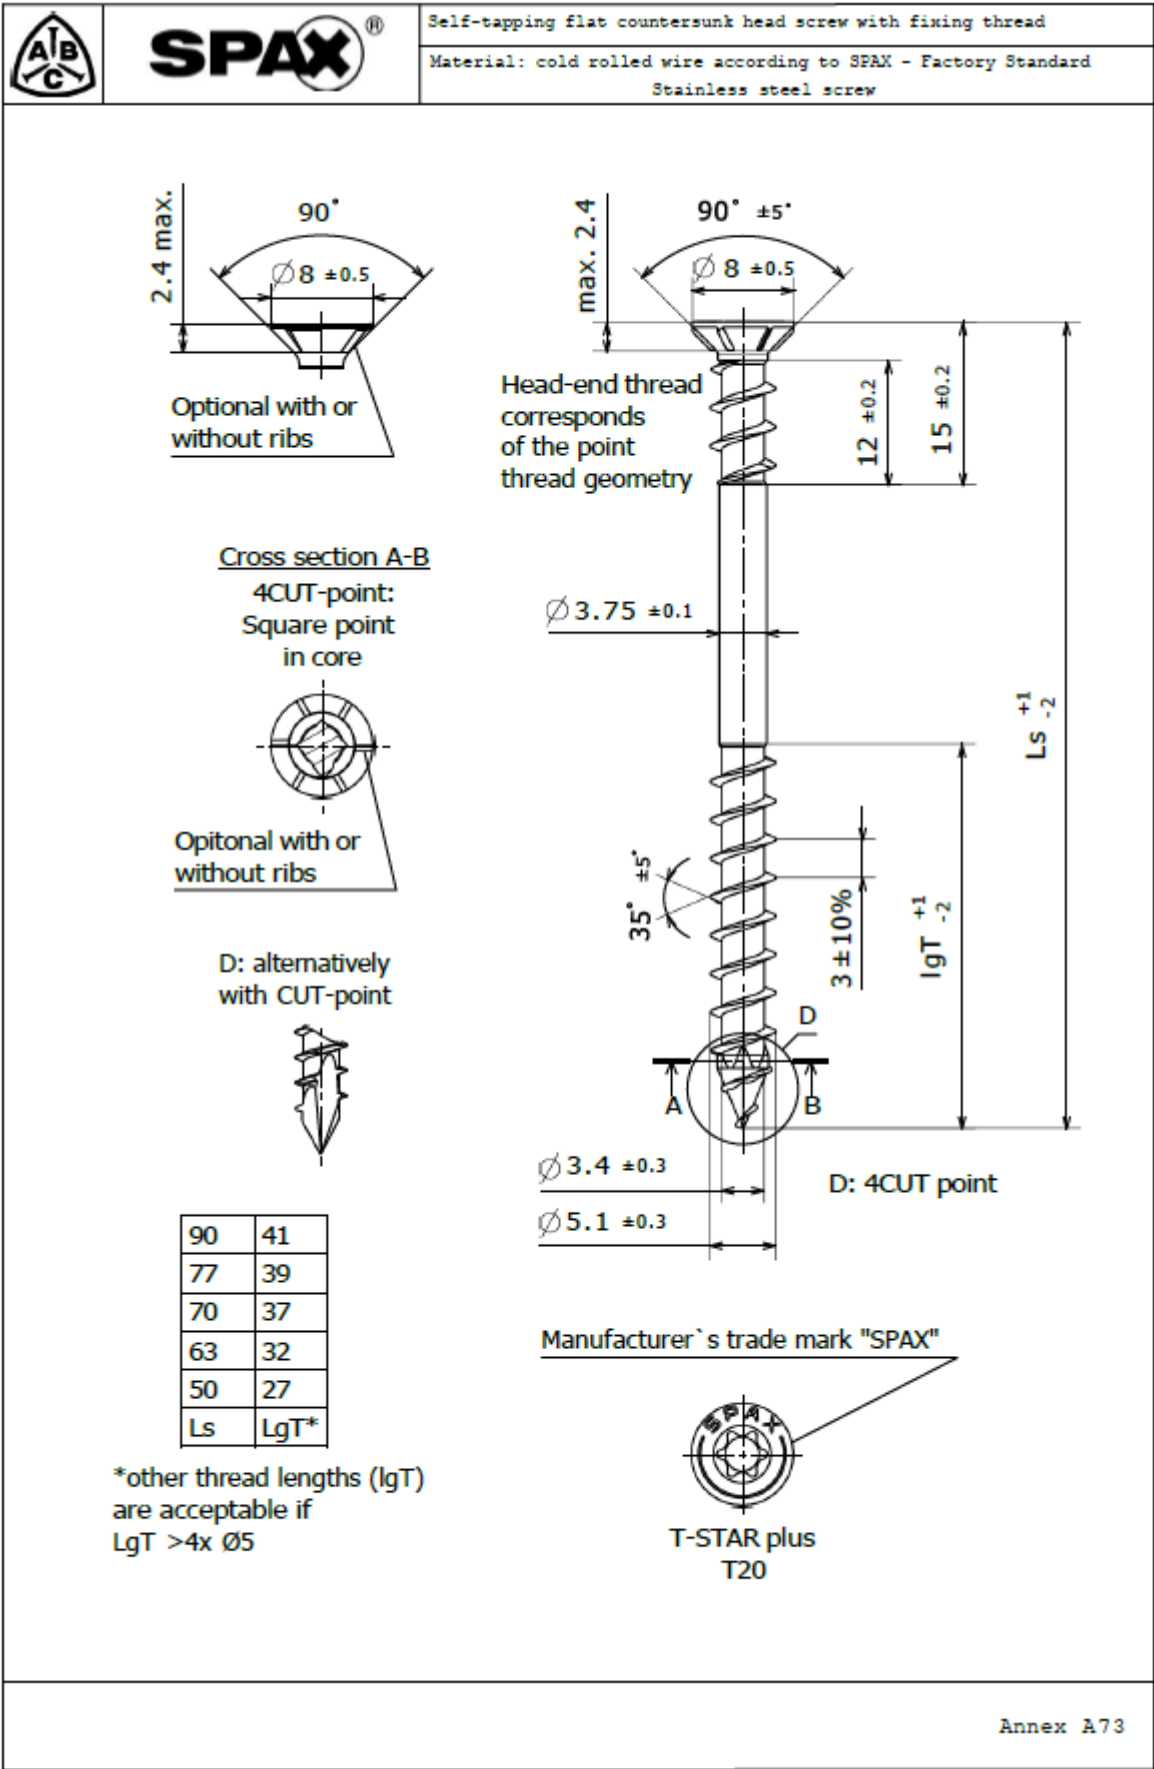


Annex B

Minimum distances and spacing

Minimum distances and spacing for exclusively axially loaded SPAX screws with CUT or 4CUT drill tip or with $d \leq 8$ mm in non-predrilled holes in members of solid timber, glued laminated timber or similar glued products

Single configuration

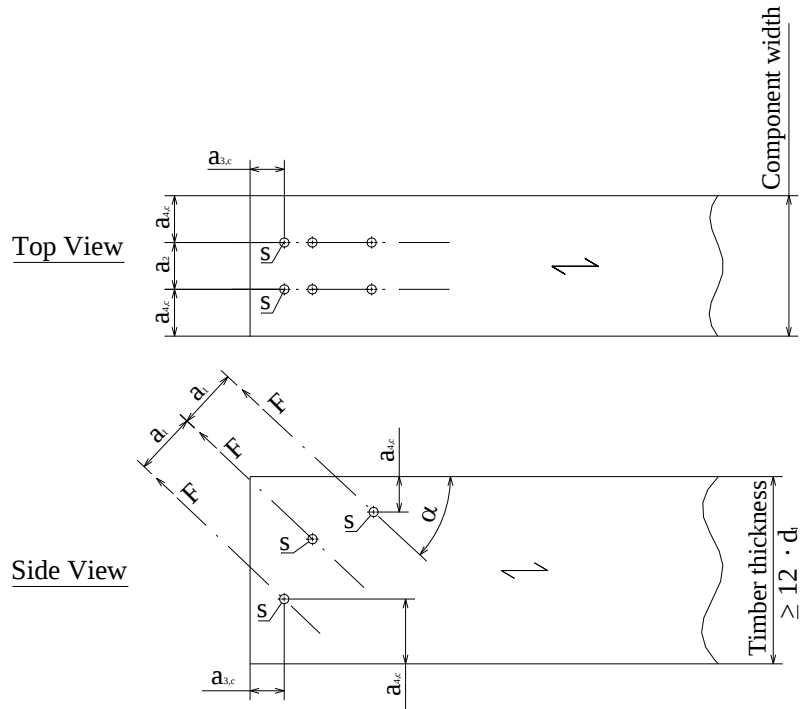

grain direction

screw axis

S centroid of the part of the screw in the timber

$15^\circ \leq \alpha \leq 90^\circ$

$$a_1 \geq 5 \cdot d$$

$$a_2 \geq 2,5 \cdot d$$

$$a_{3,c} \geq 5 \cdot d$$

$$a_{4,c} \geq 4 \cdot d$$


$$\geq 3 \cdot d \quad \text{for screws with CUT or 4CUT drill tip}$$

$$a_1 \cdot a_2 \geq 25 \cdot d^2$$

Minimum distances and spacing see also 3.11

Minimum timber thickness $t = 12 \cdot d$ for solid or glued laminated timber and $t = 6 \cdot d$ for laminated veneer lumber, see also 3.11

Minimum distances and spacing for exclusively axially loaded SPAX screws with CUT or 4CUT drill tip or with $d \leq 8$ mm in non-predrilled holes in members of solid timber, glued laminated timber or similar glued products
Crosswise configuration

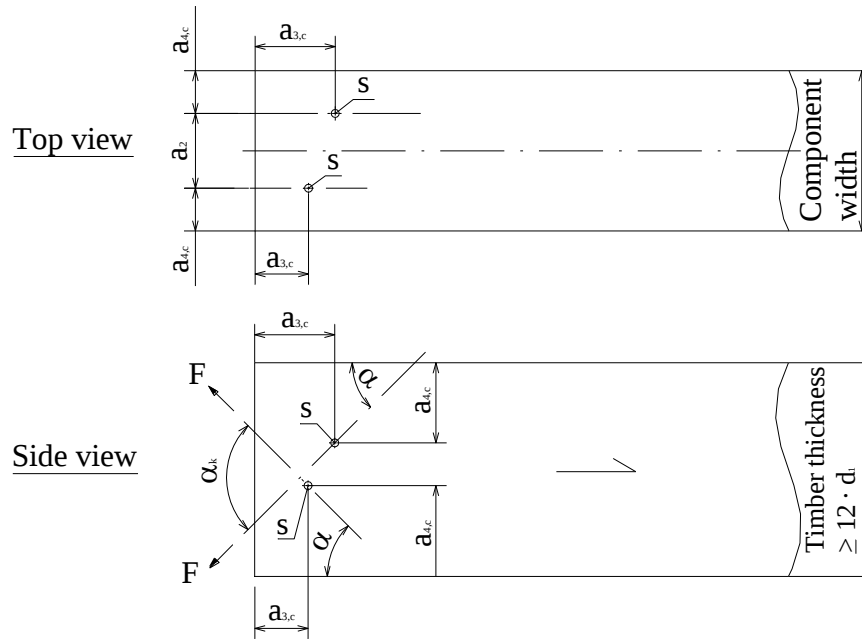

$\longleftrightarrow$ grain direction

--- screw axis

S centroid of the part of the screw in the timber

$15^\circ \leq \alpha \leq 90^\circ$

$$a_1 \geq 5 \cdot d$$

$$a_2 \geq 1,5 \cdot d \quad \text{for } 70^\circ < \alpha_k \leq 90^\circ$$

$$\geq 2,5 \cdot d \cdot (1 - \alpha_k / 180^\circ) \quad \text{for } 30^\circ \leq \alpha_k \leq 70^\circ$$

$$a_{3,c} \geq 5 \cdot d$$

$$a_{4,c} \geq 4 \cdot d$$

$$\geq 3 \cdot d$$

for screws with CUT or 4CUT drill tip

$$a_1 \cdot a_2 \geq 25 \cdot d^2$$

Minimum distances and spacing see also 3.11

Minimum timber thickness $t = 12 \cdot d$ for solid or glued laminated timber and $t = 6 \cdot d$ for laminated veneer lumber, see also 3.11

Mechanically jointed beams

SPAX screws with a full thread or threaded rods may be used for connections in structural members which are composed of several parts in mechanically jointed beams or columns.

The axial slip modulus K_{ser} of a screw or threaded rod with a full thread for the serviceability limit state in the direction of the screw axis should be taken independent of angle α to the grain as:

$$C = K_{ser} = 25 \cdot d \cdot \ell_{ef} \quad [\text{N/mm}] \quad \text{for screws or threaded rods in softwood}$$


$$C = K_{ser} = 30 \cdot d \cdot \ell_{ef} \quad [\text{N/mm}] \quad \text{for screws in pre-drilled hardwood}$$

Where

d outer thread diameter [mm]

ℓ_{ef} penetration length in the respective structural member [mm], $\ell_{ef} = \ell_1$ or ℓ_2

Axially loaded SPAX screws or threaded rods in solid or glued laminated timber or laminated veneer lumber
Single configuration

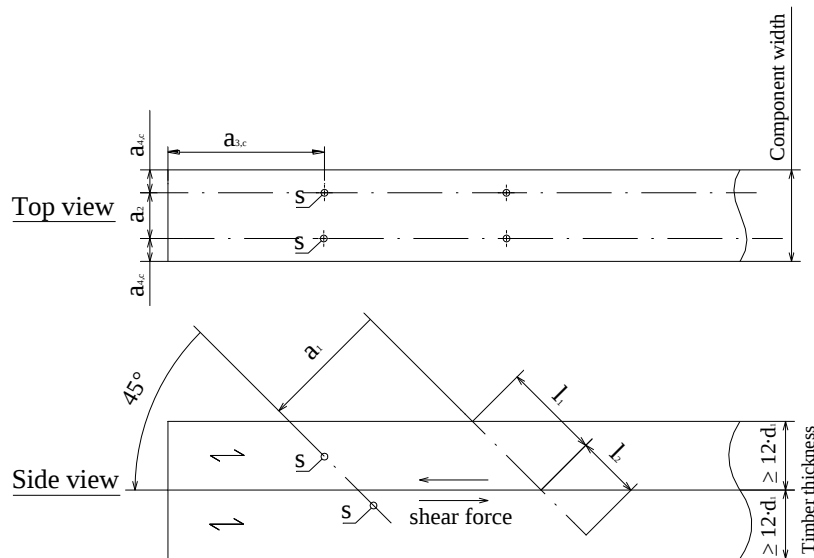

- $\rightarrow$ grain direction
- screw axis
- S centroid of the part of the screw in the timber

$$a_1 \geq 5 \cdot d$$

$$a_2 \geq 2,5 \cdot d$$

$$a_{3,c} \geq 5 \cdot d$$

$$a_{4,c} \geq 4 \cdot d$$


$$\geq 3 \cdot d \quad \text{for screws with CUT or 4CUT drill tip}$$

$$a_1 \cdot a_2 \geq 25 \cdot d^2$$

Minimum distances and spacing see also 3.11

Minimum timber thickness $t = 12 \cdot d$ for solid or glued laminated timber and $t = 6 \cdot d$ for laminated veneer lumber, see also 3.11

Axially loaded SPAX screws or threaded rods in solid or glued laminated timber or laminated veneer lumber
Crosswise configuration

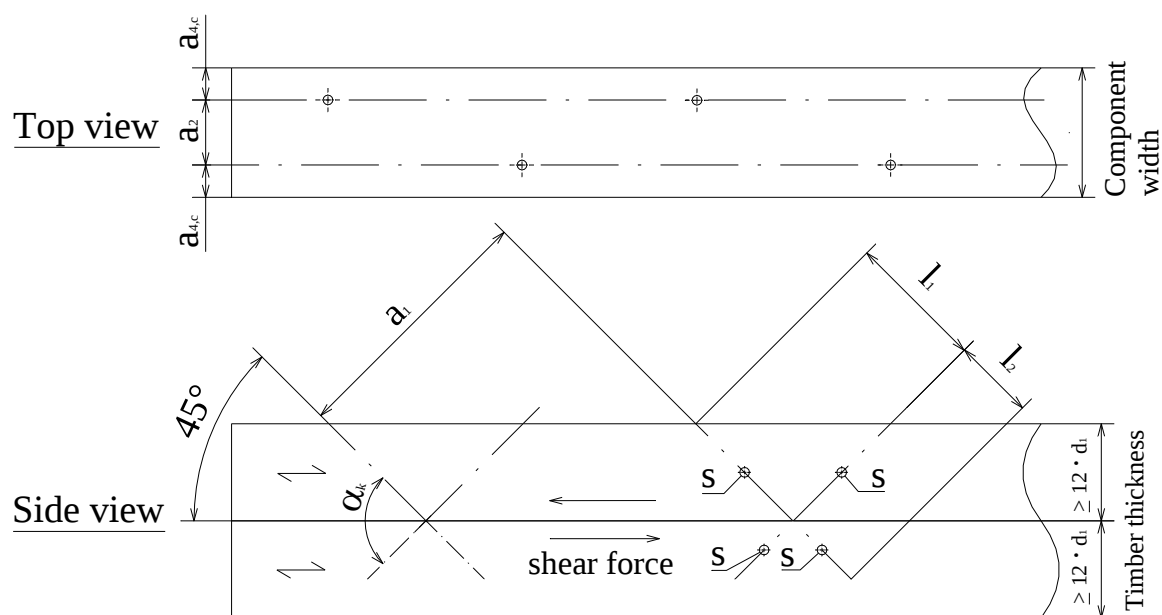

 grain direction
 screw axis
S centroid of the part of the screw in the timber


$$\begin{aligned} a_1 &\geq 5 \cdot d \\ a_2 &\geq 2,5 \cdot d \quad (a_2 \geq 1,5 \cdot d \text{ between the crossing screws of a screw couple}) \\ a_{3,c} &\geq 5 \cdot d \\ a_{4,c} &\geq 4 \cdot d \\ &\geq 3 \cdot d \quad \text{for screws with CUT or 4CUT drill tip} \\ a_1 \cdot a_2 &\geq 25 \cdot d^2 \end{aligned}$$

Minimum distances and spacing see also 3.11


Minimum timber thickness $t = 12 \cdot d$ for solid or glued laminated timber and $t = 6 \cdot d$ for laminated veneer lumber, see also 3.11

Axially or laterally loaded screws in the plane or edge surface of cross laminated timber

Definition of spacing, end and edge distances in the plane surface unless otherwise specified in the technical specification (ETA or hEN) for the cross laminated timber:

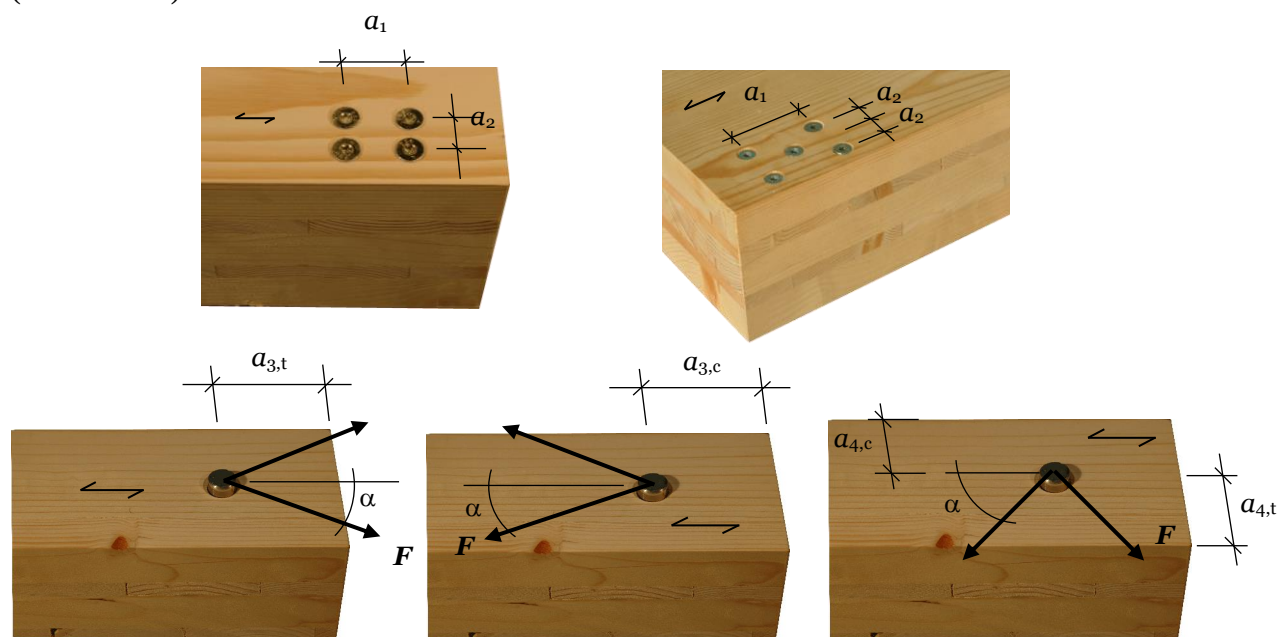

Definition of spacing, end and edge distances in the edge surface unless otherwise specified in the technical specification (ETA or hEN) for the cross laminated timber:

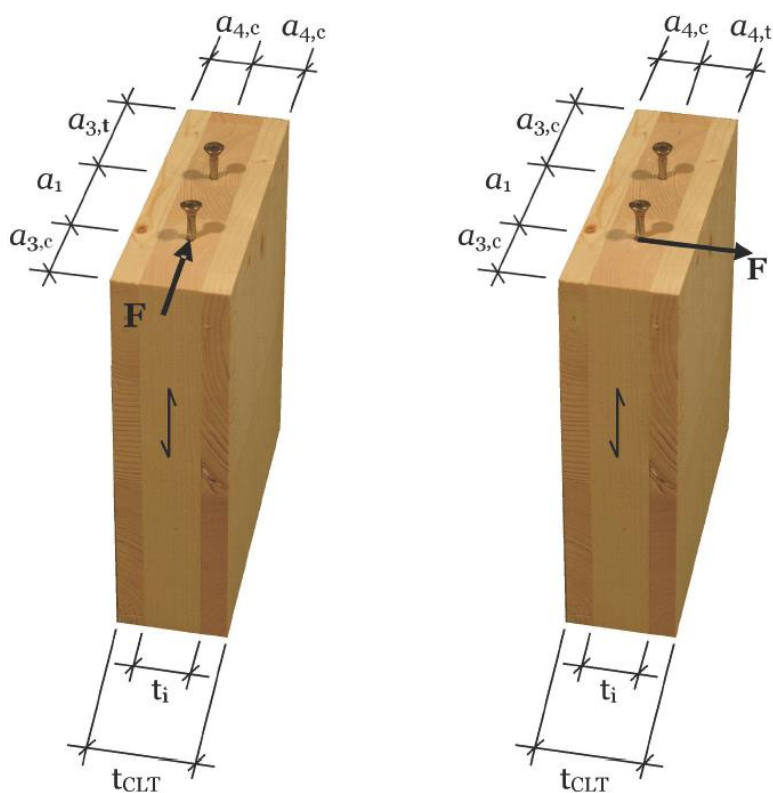

Annex C**Compression reinforcement**

SPAX screws or threaded rods with a full thread may be used for reinforcement of timber members with compression stresses at an angle α to the grain of $45^\circ \leq \alpha \leq 90^\circ$. The compression force must be evenly distributed over all screws. An appropriate steel plate as intermediate layer between timber member and support has to be installed. The screws have to be driven into the timber member flush with the surface to provide both direct contact with the steel plate and direct contact between steel plate and timber.

The characteristic load-carrying capacity for a contact area with screws with a full thread at an angle α to the grain of $45^\circ \leq \alpha \leq 90^\circ$ shall be calculated from:

$$F_{90,Rd} = \min \begin{cases} k_{c,90} \cdot B \cdot \ell_{ef,1} \cdot f_{c,90,d} + n \cdot F_{ax,Rd} \\ B \cdot \ell_{ef,2} \cdot f_{c,90,d} \end{cases} \quad (C.1)$$

Where

- $F_{90,Rd}$ Design load-carrying capacity of reinforced contact area [N]
 $k_{c,90}$ factor for compression perpendicular to the grain according to EN 1995-1-1
 B bearing width [mm]
 $\ell_{ef,1}$ effective length of contact area according to EN 1995-1-1 [mm]
 $f_{c,90,d}$ design compressive strength perpendicular to the grain [N/mm²]
 n number of reinforcement screws, $n = n_0 \cdot n_{90}$
 n_0 number of reinforcement screws arranged in a row parallel to the grain
 n_{90} number of reinforcement screws arranged in a row perpendicular to the grain
 $F_{ax,Rd}$ Design compressive capacity [N], see page 7
 $\ell_{ef,2}$ effective distribution length in the plane of the screw tips [mm]
 $\ell_{ef,2} = \ell_{ef} + (n_0 - 1) \cdot a_1 + \min(\ell_{ef}; a_{3,c})$
for end-bearings [mm]
 $\ell_{ef,2} = 2 \cdot \ell_{ef} + (n_0 - 1) \cdot a_1$ for centre-bearings [mm]
 ℓ_{ef} point side penetration length [mm]
 a_1 spacing parallel to the grain [mm]
 $a_{3,c}$ end distance [mm]


If screws are driven into the member from top and bottom and the screws are overlapping at least $10 \cdot d$, i.e. $\ell_{ef,top} + \ell_{ef,bottom} \geq H + 10 \cdot d$, the second condition in equation (C.1) may be disregarded.

Reinforcing screws or threaded rods for wood-based panels are not covered by this European Technical Assessment.

Reinforced centre-bearing

- H component height [mm]
 B bearing width [mm]
 ℓ_{ef} point side penetration length [mm]
 $\ell_{ef,2}$ effective distribution length in the plane of the screw tips [mm]
 $= 2 \cdot \ell_{ef} + (n_0 - 1) \cdot a_1$ for centre-bearings



-  grain direction
 screw axis
 $45^\circ \leq \alpha \leq 90^\circ$

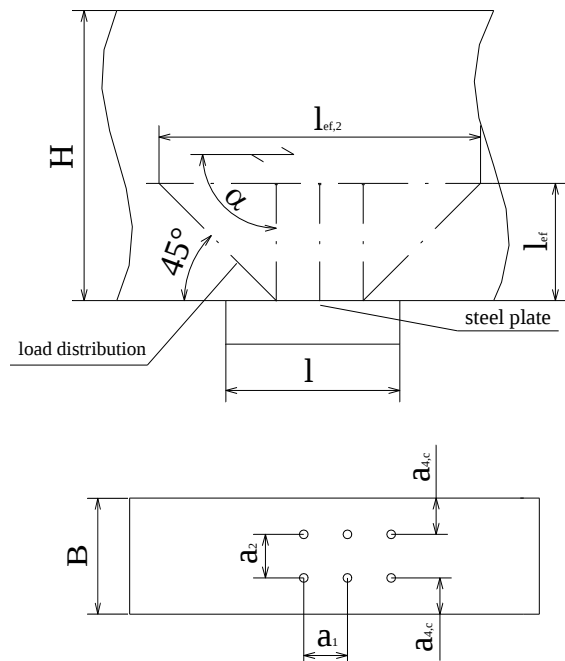

Reinforced end-bearing

H component height [mm]
 B bearing width [mm]
 ℓ_{ef} point side penetration length [mm]
 $\ell_{ef,2}$ effective distribution length in the plane of the screw tips [mm]
 $= \ell_{ef} + (n_0 - 1) \cdot a_1 + \min(\ell_{ef}; a_{3,c})$ for end-bearings

$\nearrow$ grain direction
 $\cdots$ screw axis
 $45^\circ \leq \alpha \leq 90^\circ$

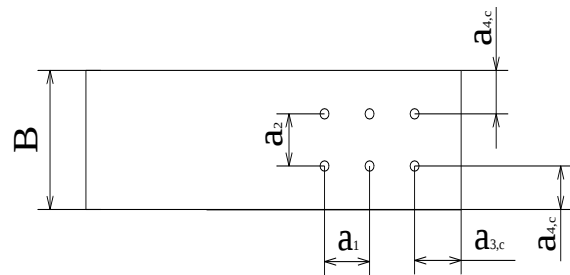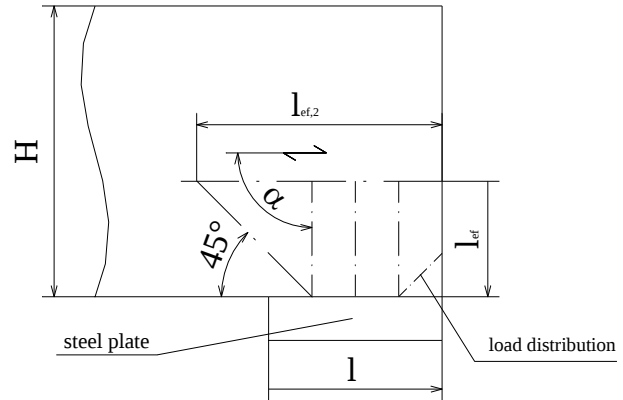

$a_1 \geq 5 \cdot d$
 $a_2 \geq 2,5 \cdot d$
 $a_{3,c} \geq 5 \cdot d$
 $a_{4,c} \geq 4 \cdot d$
 $\geq 3 \cdot d$ for screws with CUT or 4CUT drill tip
 $a_1 \cdot a_2 \geq 25 \cdot d^2$

The screw heads must be flush with the surface of the structural timber member.

Annex D

Tensile reinforcement perpendicular to grain

Unless specified otherwise in national provisions that apply at the installation site, the axial capacity of a reinforcement of a timber member loaded by a connection force perpendicular to the grain shall fulfil the following condition:

$$\frac{[1 - 3 \cdot \alpha^2 + 2 \cdot \alpha^3] \cdot F_{90,d}}{F_{ax,Rd}} \leq 1$$


Where

$F_{90,d}$ Design value of the force component perpendicular to the grain [N],

$\alpha = a/h$

h = member depth [mm]

$F_{ax,Rd}$ Minimum of the design values of the withdrawal capacity and the tensile capacity of the reinforcing screws or threaded rods where ℓ_{ef} is the smaller value of the penetration depth below or above the potential crack

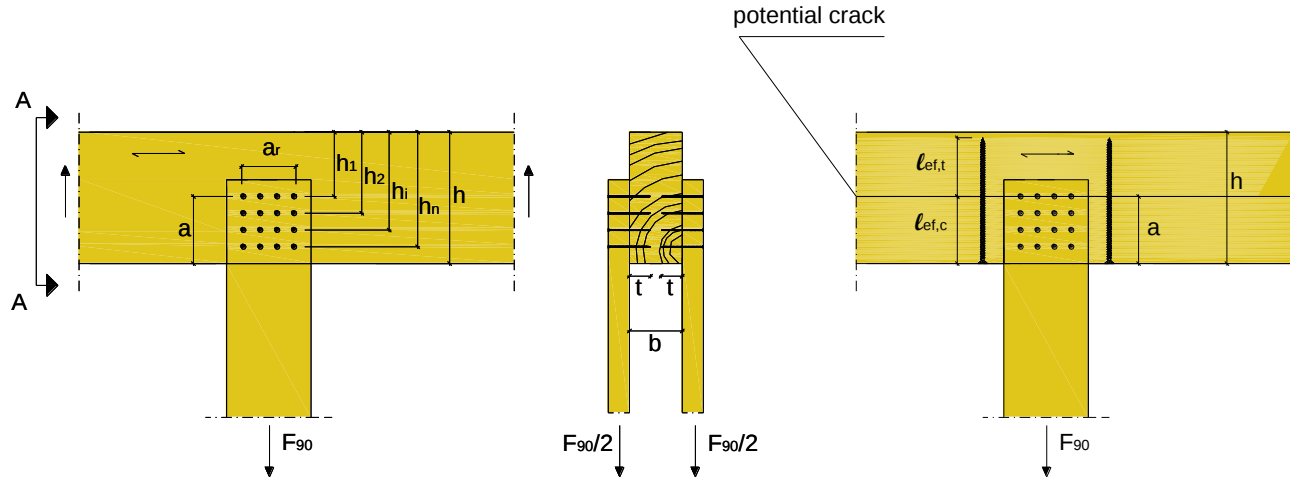

Unless specified otherwise in national provisions that apply at the installation site, the axial capacity of a reinforcement of a notched beam support shall fulfil the following condition:

$$\frac{1,3 \cdot V_d \cdot [3 \cdot (1 - \alpha)^2 - 2 \cdot (1 - \alpha)^3]}{F_{ax,Rd}} \leq 1$$

Where


V_d Design value of the shear force [N],

$\alpha = h_e/h$

h = member depth [mm]

$F_{ax,Rd}$ Minimum of the design values of the withdrawal capacity and the tensile capacity of the reinforcing screws or threaded rods where ℓ_{ef} is the smaller value of the penetration depth below or above the potential crack [N]

The minimum spacing a_2 of threaded rods used as reinforcement of a notched beam support is $a_2 = 3 \cdot d$, the minimum end or edge distance is $a_{3,c} = 2,5 \cdot d$ or $a_{4,c} = 2,5 \cdot d$.

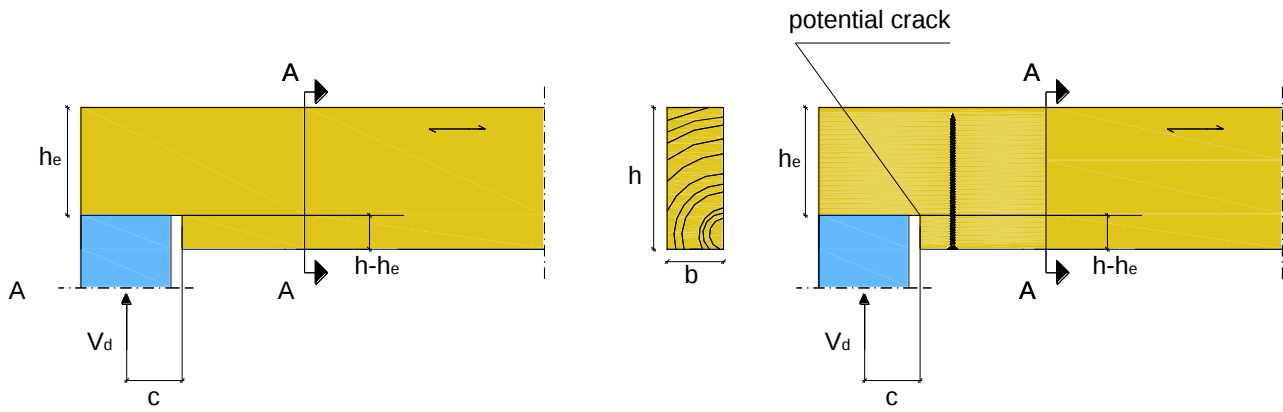

Unless specified otherwise in national provisions that apply at the installation site, the axial capacity of a reinforcement of a hole in a beam shall fulfil the following condition:

$$\frac{F_{t,V,d} + F_{t,M,d}}{F_{ax,Rd}} \leq 1$$

Where

$F_{t,V,d}$ Design value of the force perpendicular to the grain due to shear force [N]:

$$F_{t,V,d} = \frac{V_d \cdot h_d}{4 \cdot h} \cdot \left[3 - \frac{h_d^2}{h^2} \right]$$

V_d Design value of the member shear force at the hole end [N],

h = member depth [mm]

h_d = hole depth for rectangular holes [mm]

h_d = 70 % of hole diameter for circular holes [mm]

$F_{t,M,d}$ Design value of the force perpendicular to the grain due to bending moment [N]:


$$F_{t,M,d} = 0,008 \cdot \frac{M_d}{h_r}$$

M_d Design value of the member bending moment at the hole end [Nmm],

h_r = min (h_{ro} ; h_{ru}) for rectangular holes [mm]

h_r = min (h_{ro} ; h_{ru}) + 0,15· h_d for circular holes [mm]

$F_{ax,Rd}$ Minimum of the design values of the withdrawal capacity and the tensile capacity of the reinforcing screws or threaded rods where ℓ_{ef} is the smaller value of the penetration depth below or above the potential crack [N].

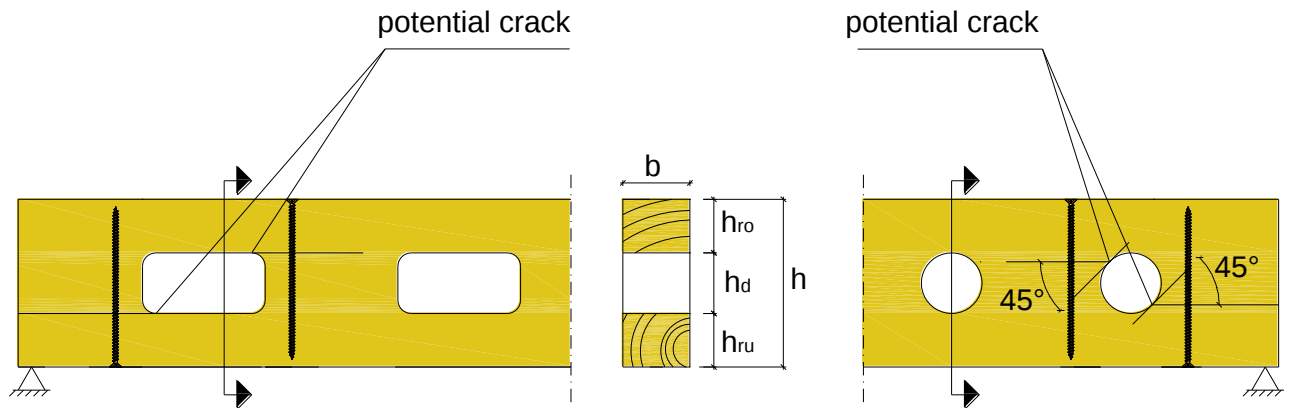

Apart from the reinforcement with screws, strength verification is required for the shear strength of the timber member in the vicinity of the hole.

Annex E

Shear reinforcement

Unless specified otherwise in national provisions that apply at the installation site, the shear stress in reinforced areas of timber members with a stress component parallel to the grain shall fulfil the following condition:

$$\tau_d \leq \frac{f_{v,d} \cdot k_\tau}{\eta_H}$$

Where:

τ_d is the design shear stress disregarding the reinforcement [N/mm²];

$f_{v,d}$ is the design shear strength [N/mm²];

$$k_\tau = 1 - 0,46 \cdot \sigma_{90,d} - 0,052 \cdot \sigma_{90,d}^2$$

$\sigma_{90,d}$ is the design stress perpendicular to the grain (negative value for compression) [N/mm²];

$$\sigma_{90,d} = \frac{F_{ax,d}}{\sqrt{2} \cdot b \cdot a_1}$$

$$F_{ax,d} = \frac{\sqrt{2} \cdot (1 - \eta_H) \cdot V_d \cdot a_1}{h} \text{ [N]}$$

$$\eta_H = \frac{G \cdot b}{G \cdot b + \frac{1}{2 \cdot \sqrt{2} \left(\frac{6}{\pi \cdot d \cdot h \cdot k_{ax}} + \frac{a_1}{EA_S} \right)}}$$

V_d is the design shear force [N];

G is the shear modulus of the timber member, $G = 650$ [N/mm²],

b is the width of the timber member [mm],

d is the outer thread diameter [mm],

h is the depth of the timber member [mm],

k_{ax} is the connection stiffness between rod or screw and timber member [N/mm³],

$k_{ax} = 5$ N/mm³ for threaded rods $d = 16$ mm, $k_{ax} = 12,5$ N/mm³ for self-tapping screws $d = 8$ mm,

a_1 is the spacing parallel to the grain of the rods or screws arranged in one row [mm], for n parallel rows, an effective spacing $a_{1,ef} = a_1/n$ may be used,

EA_S is the axial stiffness of one rod or screw [N],

$$EA_S = \frac{E \cdot \pi \cdot d_2^2}{4} = 165.000 d_2^2,$$

d_2 is the inner thread diameter of the rod or screw [mm],

$d_2 = 12$ mm for threaded rods $d = 16$ mm, $d_2 = 5$ mm for screws $d = 8$ mm.

The axial capacity of a threaded rod or screw shall fulfil the following condition:

$$\frac{F_{ax,d}}{F_{ax,Rd}} \leq 1$$

where: $F_{ax,Rd}$ Minimum of the design values of the withdrawal capacity and the tensile capacity of the reinforcing rods or screws. The effective penetration length is 50 % of the threaded length [N].

Outside reinforced areas (shaded area in Figure E.1) the shear design shall fulfil the conditions for unreinforced members.

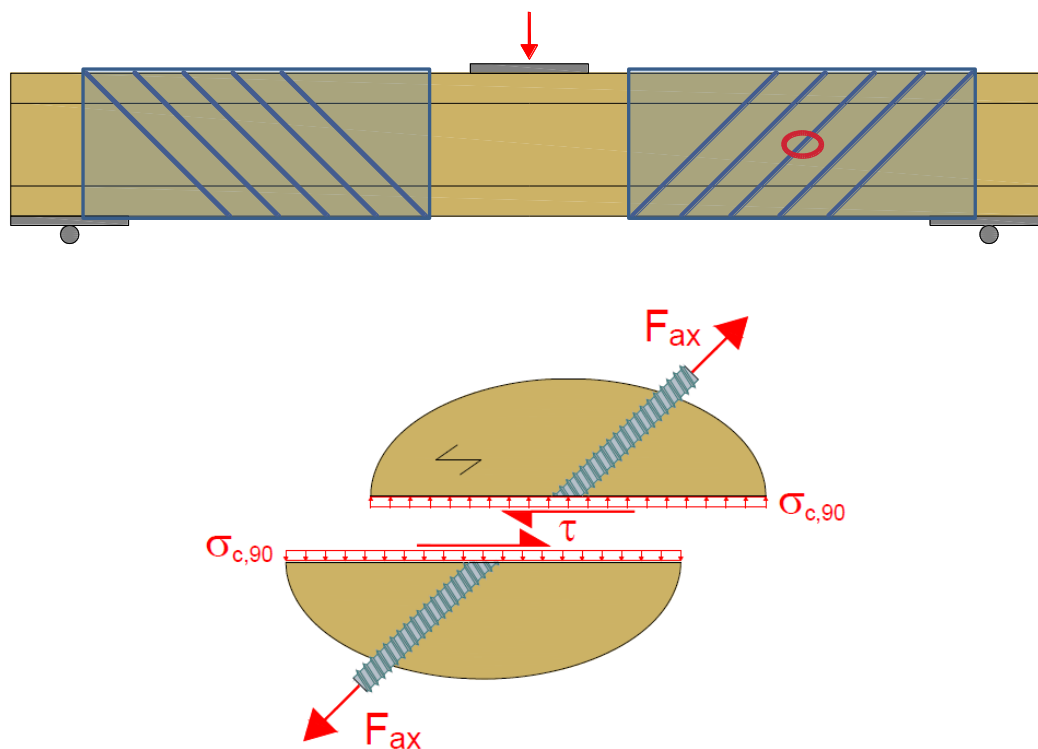


Figure E.1: Timber member with shear reinforcement; shaded areas: reinforced areas with screws arranged under 45°

Annex F

Thermal insulation material on top of rafters

SPAX screws with an outer thread diameter $6 \text{ mm} \leq d \leq 12 \text{ mm}$ may be used for the fixing of Thermal insulation material on top of rafters.

The thickness of the insulation shall not exceed 400 mm. The rafter insulation must be placed on top of solid timber or glued laminated timber rafters or cross-laminated timber members and be fixed by battens arranged parallel to the rafters or by wood-based panels on top of the insulation layer. The insulation of vertical facades is also covered by the rules given here.

Screws must be screwed in the rafter through the battens or panels and the insulation without pre-drilling in one sequence.

The angle α between the screw axis and the grain direction of the rafter should be between 30° and 90° .

The rafter consists of solid timber (softwood) according to EN 338, glued laminated timber according to EN 14081, cross-laminated timber, or laminated veneer lumber according to EN 14374 or to European Technical Assessment or similar glued members according to European Technical Assessment and has a minimum width of 60 mm.

The battens must be from solid timber (softwood) according to EN 338:2003-04. The minimum thickness t and the minimum width b of the battens is given as follows:

Screws $d \leq 8,0 \text{ mm}$:	$b_{\min} = 50 \text{ mm}$	$t_{\min} = 30 \text{ mm}$
Screws $d = 10 \text{ mm}$:	$b_{\min} = 60 \text{ mm}$	$t_{\min} = 40 \text{ mm}$
Screws $d = 12 \text{ mm}$:	$b_{\min} = 80 \text{ mm}$	$t_{\min} = 100 \text{ mm}$

Alternatively, to the battens, panels with a minimum thickness of 20 mm from plywood according to EN 636, particleboard according to EN 312, oriented strand board OSB/3 and OSB/4 according to EN 300 or European Technical Assessment and solid wood panels according to EN 13353 may be used. This only applies to the system with parallel inclined screws.

The insulation must comply with a European Technical Assessment.

Friction forces shall not be considered for the design of the characteristic axial capacity of the screws.


The anchorage of wind suction forces as well as the bending stresses of the battens or the boards, respectively, shall be considered in design. Additional screws perpendicular to the grain of the rafter (angle $\alpha = 90^\circ$) may be arranged if necessary.

The maximum screw spacing is $e_{\text{Scr}} = 1,75 \text{ m}$.

Thermal insulation material on rafters with parallel inclined screws

Mechanical model

The system of rafter, Thermal insulation material on top of rafter and battens parallel to the rafter may be considered as a beam on elastic foundation. The batten represents the beam, and the Thermal insulation material on top of the rafter the elastic foundation. The minimum compression stress of the Thermal insulation material at 10 % deformation, measured according to EN 826¹, shall be $\sigma_{(10\%)} = 0,05 \text{ N/mm}^2$. The batten is loaded perpendicular to the axis by point loads F_b . Further point loads F_s are from the shear load of the roof due to dead and snow load, which are transferred from the screw heads into the battens.

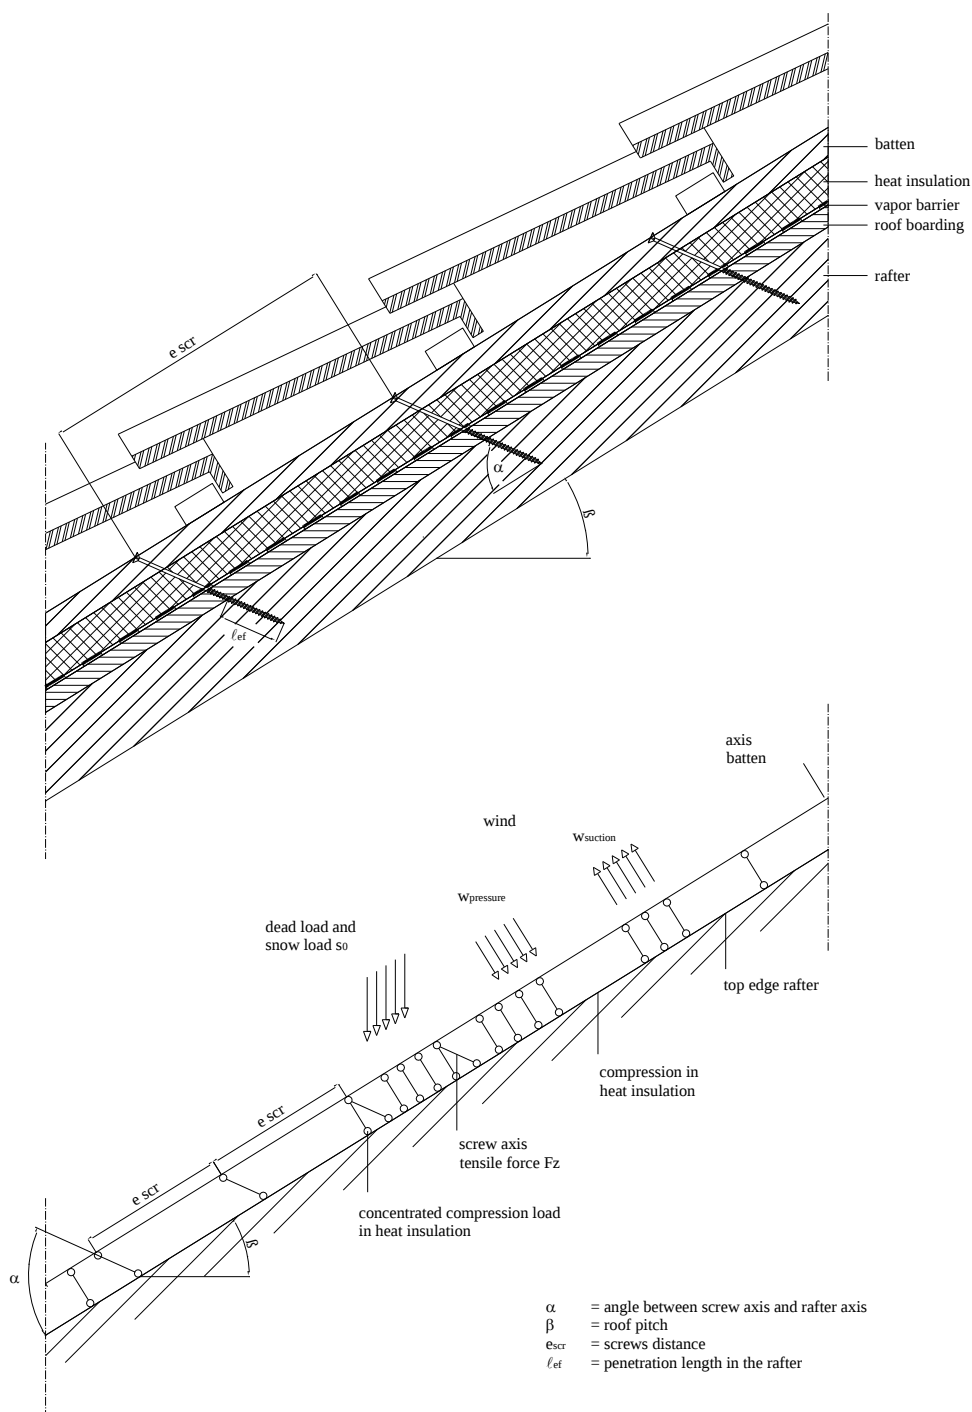

¹ EN 826:1996

Design of the battens

The bending stresses are calculated as:

$$M = \frac{(F_b + F_s) \cdot \ell_{\text{char}}}{4}$$

Where

$$\ell_{\text{char}} = \text{characteristic length } \ell_{\text{char}} = \sqrt[4]{\frac{4 \cdot EI}{w_{\text{ef}} \cdot K}}$$

EI = bending stiffness of the batten [Nmm²]

K = coefficient of subgrade [N/mm³]

w_{ef} = effective width of the Thermal insulation material [mm]

F_b = Point loads perpendicular to the battens [N]

F_s = Point loads perpendicular to the battens, load application in the area of the screw heads [N]

The coefficient of subgrade K may be calculated from the modulus of elasticity E_{HI} and the thickness t_{HI} of the Thermal insulation material if the effective width w_{ef} of the Thermal insulation material under compression is known. Due to the load extension in the Thermal insulation material the effective width w_{ef} is greater than the width of the batten or rafter, respectively. For further calculations, the effective width w_{ef} of the Thermal insulation material may be determined according to:

$$w_{\text{ef}} = w + t_{\text{HI}} / 2$$

where

w = minimum width of the batten or rafter, respectively [mm]

t_{HI} = thickness of the Thermal insulation material [mm]

$$K = \frac{E_{\text{HI}}}{t_{\text{HI}}}$$

The following condition shall be satisfied:

$$\frac{\sigma_{\text{m,d}}}{f_{\text{m,d}}} = \frac{M_{\text{d}}}{W \cdot f_{\text{m,d}}} \leq 1$$

For the calculation of the section modulus W the net cross section has to be considered.

The shear stresses shall be calculated according to:

$$V = \frac{(F_b + F_s)}{2}$$

The following condition shall be satisfied:

$$\frac{\tau_{\text{d}}}{f_{\text{v,d}}} = \frac{1,5 \cdot V_{\text{d}}}{A \cdot f_{\text{v,d}}} \leq 1$$

For the calculation of the cross section area the net cross section has to be considered.

Design of the Thermal insulation material

The compressive stresses in the Thermal insulation material shall be calculated according to:

$$\sigma = \frac{1,5 \cdot F_b + F_s}{2 \cdot \ell_{\text{char}} \cdot w}$$

The design value of the compressive stress shall not be greater than 110 % of the compressive stress at 10 % deformation calculated according to EN 826.

Design of the screws

The screws are loaded predominantly axially. The axial tension force in the screw may be calculated from the shear loads of the roof R_s :

$$T_s = \frac{R_s}{\cos \alpha}$$

The load-carrying capacity of axially loaded screws is the minimum design value of the axial withdrawal capacity of the threaded part of the screw, the head pull-through capacity of the screw and the tensile capacity of the screw.

In order to limit the deformation of the screw head for Thermal insulation material thicknesses over 200 mm or with compressive strength below 0,12 N/mm², respectively, the axial withdrawal capacity of the screws shall be reduced by the factors k_1 and k_2 :

$$F_{ax,\alpha,Rd} = \min \left\{ \frac{f_{ax,d} \cdot d \cdot \ell_{ef} \cdot k_1 \cdot k_2}{1,2 \cdot \cos^2 \alpha + \sin^2 \alpha} \cdot \left(\frac{\rho_k}{350} \right)^{0,8} ; f_{head,d} \cdot d_h^2 \cdot \left(\frac{\rho_k}{350} \right)^{0,8} ; \frac{f_{tens,k}}{\gamma_{M2}} \right\} \text{ for SPAX screws with partial thread}$$


$$F_{ax,\alpha,Rd} = \min \left\{ \max \left\{ \frac{f_{ax,d} \cdot d \cdot \ell_{ef} \cdot k_1 \cdot k_2}{1,2 \cdot \cos^2 \alpha + \sin^2 \alpha} \cdot \left(\frac{\rho_k}{350} \right)^{0,8} ; f_{head,d} \cdot d_h^2 ; \frac{f_{ax,d} \cdot d \cdot \ell_{ef,b} \cdot k_1 \cdot k_2}{1,2 \cdot \cos^2 \alpha + \sin^2 \alpha} \right\} \cdot \left(\frac{\rho_k}{350} \right)^{0,8} ; \frac{f_{tens,k}}{\gamma_{M2}} \right\} \text{ for SPAX screws with full or double thread}$$

where:

$f_{ax,d}$	design value of the axial withdrawal parameter of the threaded part of the screw [N/mm ²]
d	outer thread diameter of the screw [mm]
ℓ_{ef}	Point side penetration length of the threaded part of the screw in the batten [mm], $\ell_{ef} \geq 40$ mm
$\ell_{ef,b}$	Penetration length of the threaded part of the screw in the batten [mm]
α	Angle between grain and screw axis [°] ($\alpha \geq 30^\circ$)
ρ_k	characteristic density of the wood-based member [kg/m ³]
$f_{head,d}$	design value of the head pull-through capacity of the screw [N/mm ²]
d_h	head diameter [mm]
$f_{tens,k}$	characteristic tensile capacity of the screw [N]
γ_{M2}	partial factor according to EN 1993-1-1 or to the particular national annex
k_1	$\min \{1; 200/t_{HI}\}$
k_2	$\min \{1; \sigma_{10\%}/0,12\}$
t_{HI}	thickness of the Thermal insulation material [mm]
$\sigma_{10\%}$	compressive stress of the Thermal insulation material under 10 % deformation [N/mm ²]

If equation k_1 and k_2 are considered, the deflection of the battens does not need to be considered. Alternatively to the battens, panels with a minimum thickness of 20 mm from plywood according to EN 636 or an ETA or national provisions that apply at the installation site, particle board according to EN 312 or an ETA or national provisions that apply at the installation site, oriented strand board according to EN 300 or an ETA or national provisions that apply at the installation site and solid wood panels according to EN 13353 or an ETA or national provisions that apply at the installation site or cross laminated timber according to an ETA may be used.

Thermal insulation material on rafters with alternatively inclined screws

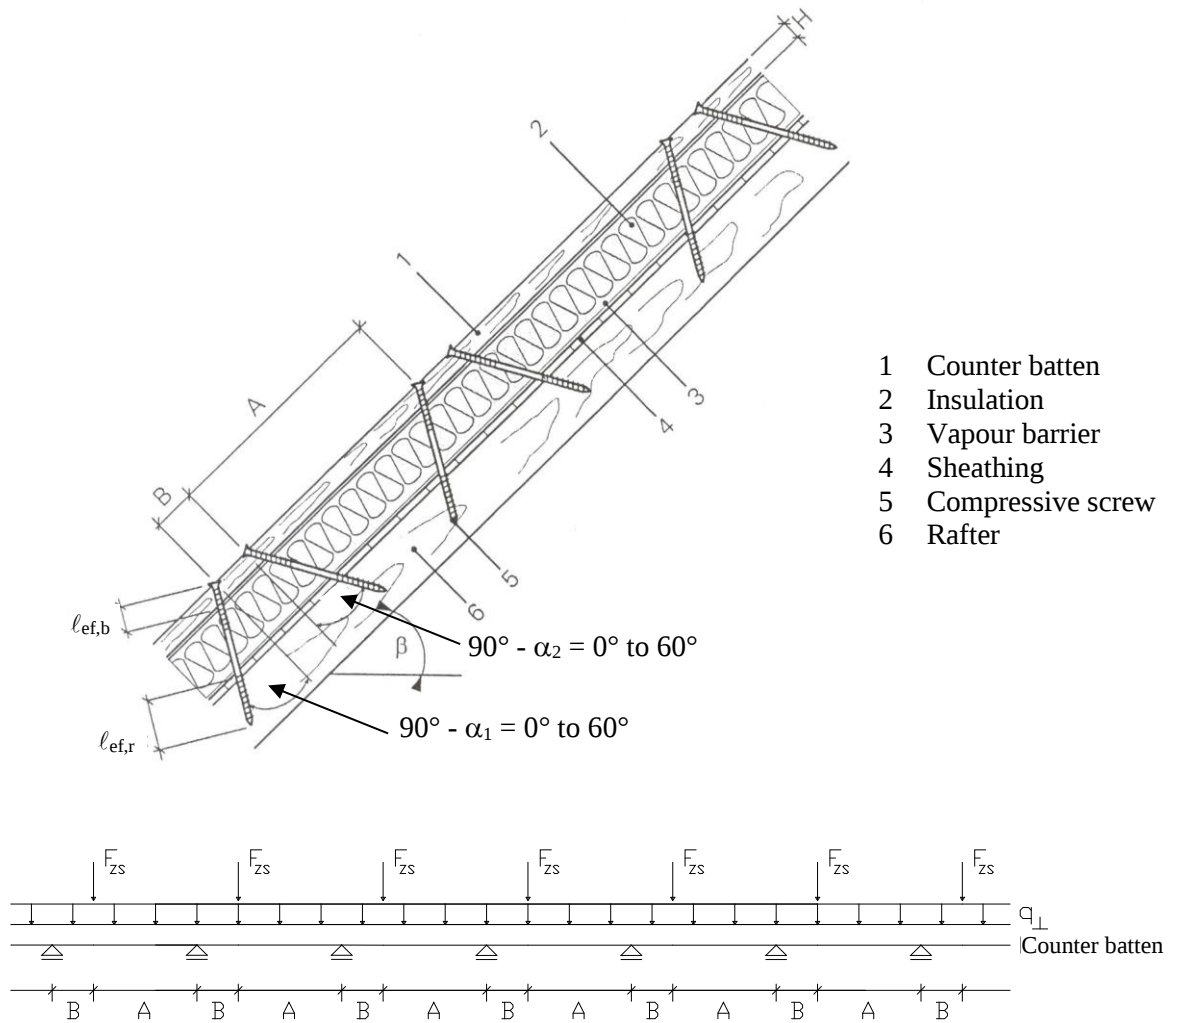

Mechanical model

Depending on the screw spacing and the arrangement of tensile and compressive screws with different inclinations the battens are loaded by significant bending moments. The bending moments are derived based on the following assumptions:

- The tensile and compressive loads in the screws are determined based on equilibrium conditions from the actions parallel and perpendicular to the roof plane. These actions are constant line loads $q_\perp$ and $q_\parallel$.
- The screws act as hinged columns supported 10 mm within the batten or rafter, respectively. The effective column length consequently equals the length of the screw between batten and rafter plus 20 mm.
- The batten is considered as a continuous beam with a constant span $\ell = A + B$. The compressive screws constitute the supports of the continuous beam while the tensile screws transfer concentrated loads perpendicular to the batten axis.

The screws are predominantly loaded in withdrawal or compression, respectively. The screw's normal forces are determined based on the loads parallel and perpendicular to the roof plane:

Compressive screw:
$$F_{c,Ed} = (A + B) \cdot \left(-\frac{q_\parallel}{\cos \alpha_1 + \sin \alpha_1 / \tan \alpha_2} - \frac{q_\perp \cdot \sin(90^\circ - \alpha_2)}{\sin(\alpha_1 + \alpha_2)} \right)$$

Tensile screw:
$$F_{t,Ed} = (A + B) \cdot \left(\frac{q_\parallel}{\cos \alpha_2 + \sin \alpha_2 / \tan \alpha_1} - \frac{q_\perp \cdot \sin(90^\circ - \alpha_1)}{\sin(\alpha_1 + \alpha_2)} \right)$$

The bending moments in the batten follow from the constant line load $q_{\perp}$ and the load components perpendicular to the batten from the tensile screws. The span of the continuous beam is $(A + B)$. The load component perpendicular to the batten from the tensile screw is:

$$F_{ZS,Ed} = (A + B) \cdot \left(\frac{q_{\parallel}}{1/\tan \alpha_1 + 1/\tan \alpha_2} - \frac{q_{\perp} \cdot \sin(90^\circ - \alpha_1) \cdot \sin \alpha_2}{\sin(\alpha_1 + \alpha_2)} \right)$$

Where:

- $q_{\parallel}$ Constant line load parallel to batten [N/mm]
- $q_{\perp}$ Constant line load perpendicular to batten [N/mm]
- α_1 Angle between compressive screw axis and grain direction [°]
- α_2 Angle between tensile screw axis and grain direction [°]

A positive value for F_{ZS} means a load towards the rafter, a negative value a load away from the rafter.

Design of the screws

The load-carrying capacity of the screws shall be calculated as follows:

Screws loaded in tension:

$$F_{ax,\alpha,Rd} = \min \left\{ \frac{f_{ax,d} \cdot d \cdot \ell_{ef,b}}{1.2 \cdot \cos^2 \alpha + \sin^2 \alpha} \cdot \left(\frac{\rho_{b,k}}{350} \right)^{0.8}; \frac{f_{ax,d} \cdot d \cdot \ell_{ef,r}}{1.2 \cdot \cos^2 \alpha + \sin^2 \alpha} \cdot \left(\frac{\rho_{r,k}}{350} \right)^{0.8}; \frac{f_{tens,k}}{\gamma_{M2}} \right\}$$

Screws loaded in compression:

$$F_{ax,\alpha,Rd} = \min \left\{ \frac{f_{ax,d} \cdot d \cdot \ell_{ef,b}}{1.2 \cdot \cos^2 \alpha + \sin^2 \alpha} \cdot \left(\frac{\rho_{b,k}}{350} \right)^{0.8}; \frac{f_{ax,d} \cdot d \cdot \ell_{ef,r}}{1.2 \cdot \cos^2 \alpha + \sin^2 \alpha} \cdot \left(\frac{\rho_{r,k}}{350} \right)^{0.8}; \frac{\kappa_c \cdot N_{pl,k}}{\gamma_{M1}} \right\}$$

where:

- $f_{ax,d}$ design value of the axial withdrawal capacity of the threaded part of the screw [N/mm²]
- d outer thread diameter of the screw [mm]
- $\ell_{ef,b}$ Length of the threaded part in the batten including the head for tensile and excluding the head for compressive force [mm]
- $\ell_{ef,r}$ penetration length of the threaded part of the screw in the rafter [mm], $\ell_{ef} \geq 40$ mm
- $\rho_{b,k}$ characteristic density of the batten [kg/m³]
- $\rho_{r,k}$ characteristic density of the rafter [kg/m³]
- α angle α_1 or α_2 between screw axis and grain direction, $30^\circ \leq \alpha_1 \leq 90^\circ$, $30^\circ \leq \alpha_2 \leq 90^\circ$
- $f_{tens,k}$ characteristic tensile capacity of the screw [N]
- γ_{M1}, γ_{M2} partial factor according to EN 1993-1-1 or to the particular national annex
- $\kappa_c \cdot N_{pl,k}$ Buckling capacity of the screw [N]

Free screw length [mm]	Carbon steel				Stainless steel	
	6,0 mm	8,0 mm	10,0 mm	12,0 mm	10,0 mm	12,0 mm
	$\kappa_c \cdot N_{pl,k}$ [kN]	$\kappa_c \cdot N_{pl,k}$ [kN]	$\kappa_c \cdot N_{pl,k}$ [kN]	$\kappa_c \cdot N_{pl,k}$ [kN]	$\kappa_c \cdot N_{pl,k}$ [kN]	$\kappa_c \cdot N_{pl,k}$ [kN]
≤ 100	1,12	2,79	6,09	14,3	5,22	11,3
120	0,85	2,12	4,68	11,2	4,16	9,37
140	0,66	1,66	3,70	8,98	3,36	7,79
160	0,53	1,34	2,99	7,33	2,76	6,53
180	0,43	1,10	2,48	6,09	2,30	5,52
200		0,92	2,07	5,13	1,94	4,71
220		0,78	1,76	4,38	1,66	4,06
240		0,67	1,51	3,79	1,44	3,53
260		0,58	1,32	3,30	1,26	3,10
280		0,51	1,15	2,90	1,11	2,74
300		0,45	1,02	2,57	0,98	2,44
320		0,40	0,91	2,29	0,88	2,18
340		0,36	0,82	2,06	0,79	1,97
360		0,32	0,73	1,86	0,71	1,78
380		0,29	0,67	1,68	0,65	1,62
400		0,26	0,61	1,53	0,59	1,48
420		0,24	0,55	1,40	0,54	1,36
440		0,22	0,51	1,29	0,49	1,25
460		0,20	0,47	1,19	0,46	1,15
480		0,19	0,43	1,10	0,42	1,06